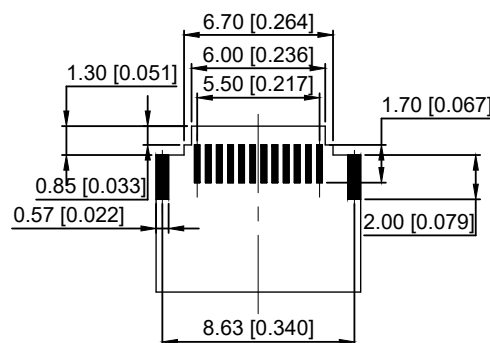
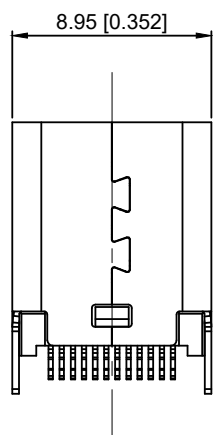

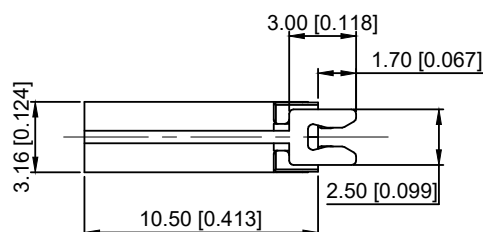


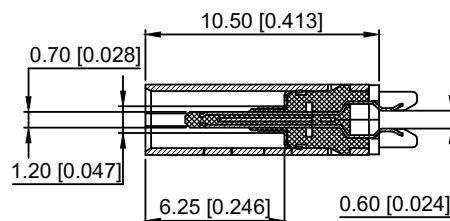
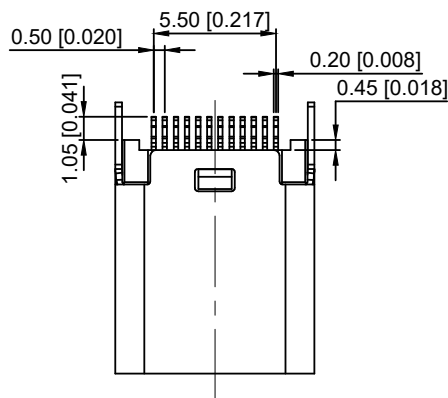


RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

SPECIFICATION:

1. Material

Housing Material: High temperature thermoplastic

Contact Terminal: High Grade Copper Alloy

Metallic Shell: Stainless Steel

Inner Ground Cover Shell: Stainless Steel

Mid Plate: Stainless Steel

2. Mechanical:

2.1. Mating force: 5-20Nf;

2.2. Unmating

force: Initial: 8-20Nf; Final: 6-20Nf;

2.3. Durability: 10000 Cycles;

3. Electrical:

3.1. Current Rating: 3A

3.2. Voltage Rating: 20V Max.;

3.3. Dielectric Withstanding

voltage: 100Vac, 60S, 10mA;

3.4. Contact resistance: 40m Ohms Max.;

3.5. Insulation Resistance: 100M Ohms Min.;

4. Environmental:

4.1. Operating temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$;

4.2. Salt Spray Test: 24H Min. (No oxidation or rust);

U262-241N-4BJ2105

1: Au1u"
2: Au3u"
4: Au15u"
5: Au30u"

1: WITH
2: WITHOUT
W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dq.cn						

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1
DWN		VIEW:	PART NO.: U262-241N-4BJ2105
CHKD		UNIT: mm/in	DWG NO.: X-U262-241N-4BJ2105
APPD		SIZE: A4	WEIGHT SHEET REVISION
			1/1 A0