

1

2

3

4

A

B

C

D

A

B

C

D

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		额定电流变更, 图面升级整理图面	2024.9.24	阿树

PART NO.:

X2011 W R-15 A-46 V01
① ② ③ ④ ⑤ ⑥ ⑦

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 2A AC/DC
- Withstanding Voltage: 1000V AC/minute
- Temperature range: -40°C ~ +125°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 30m\Omega$
- After environmental testing: $\leq 40m\Omega$

- ① Series No
② Category: W-Wafer
③ Welding Board Angle: R-Stright 90°
④ Row No. Pin No: XX-02~16Pin
⑤ Plug the Pin & Special NO:
A-With Baffle
⑥ Material: PA46 UL94V-0
⑦ Planting: V01-Gold-plated 1U"

poles	Dimensions(mm)			poles	Dimensions(mm)		
	A	B	C		A	B	C
2	2.00	6.00	4.75	10	18.00	22.00	20.75
3	4.00	8.00	6.75	11	20.00	24.00	22.75
4	6.00	10.00	8.75	12	22.00	26.00	24.75
5	8.00	12.00	10.75	13	24.00	28.00	26.75
6	10.00	14.00	12.75	14	26.00	30.00	28.75
7	12.00	16.00	14.75	15	28.00	32.00	30.75
8	14.00	18.00	16.75	16	30.00	34.00	32.75
9	16.00	20.00	18.75				

X2011WV-15A-LPSW	LCP 94V-0	Brass	Matte Tin-Plated	X2011H
X2011WV-15AHF-N0SN	PA66 UL 94V-0 Halogen Free		Tin-Plated	
X2011WV-15A-46V01	PA66 UL 94V-0			
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal






AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XKB 星城
Connection

DESIGN	阿树	VIEW:		MODEL TYPE: 2.00mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X2011WV-15A-46V01
APPROVED		SIZE:	A4	DWG NO.: X-X2011WV-15A-46V01

SCALE	PAGE	REVISION
N/A	1/1	A1

XKB INDUSTRIAL PRECISION CO., LIMITED

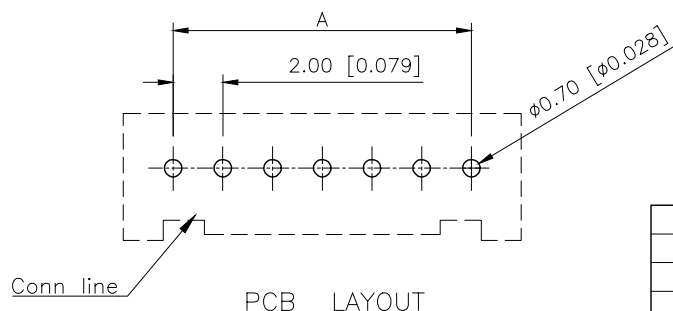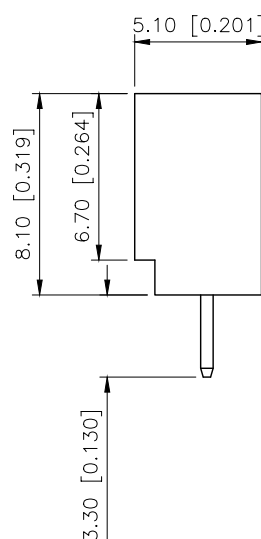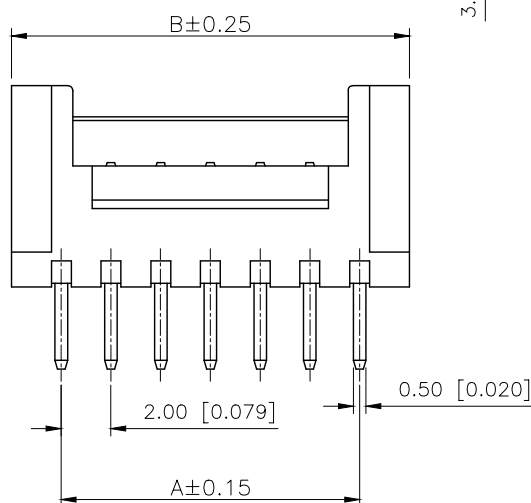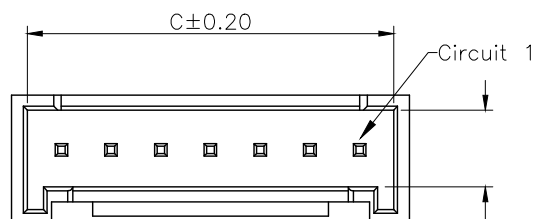

1

2

3

4