



Auxiliary switch, 1 NO+1 NC, with gold-plated contacts, accessory for main and emergency switching-off 3LD2 front mounting and for molded case switch 3LD5 UL front mounting

Model	
product brand name	SETRON
product designation	auxiliary switch
design of the product	accessories for 3LD2 main and EMERGENCY-STOP switches, front mounting
operational current	- at AC-15 at 110 V rated value6 A - at AC-15 at 230 V rated value3 A - at AC-15 at 500 V rated value1.4 A - at DC-13 at 24 V rated value4 A
special product feature	NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch
tightening torque with screw-type terminals	- minimum0.8 N·m - maximum1.2 N·m

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval	other	Environment
--------------------------	-------	-------------



[Miscellaneous](#)



[Miscellaneous](#)

[Confirmation](#)

[Environmental Con-
firmations](#)


Environment

[Environmental Con-
firmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9200-5BF>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3LD9200-5BF>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9200-5BF
CAx-Online-Generator
<http://www.siemens.com/cax>
Tender specifications
<http://www.siemens.com/specifications>

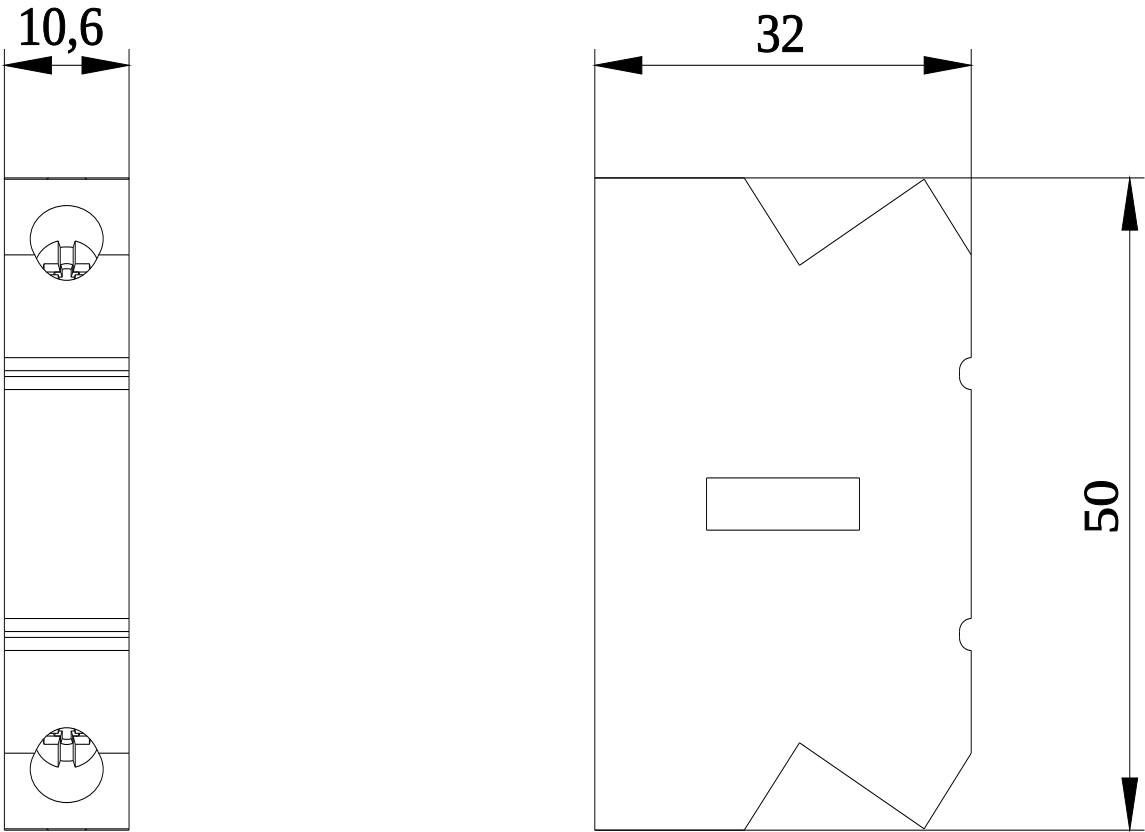

last modified:

4/18/2024 

