

Pitch:2.00x2.00mm(0.079 " x0.079 ") (Four-point Contacts)
Female Header Dual Rows S.M.T Type

ELETE
—Professional Connecting Solution—
HFLDM35 Series


Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃








Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

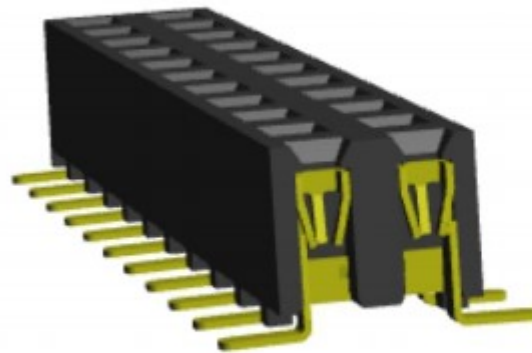

Mating with

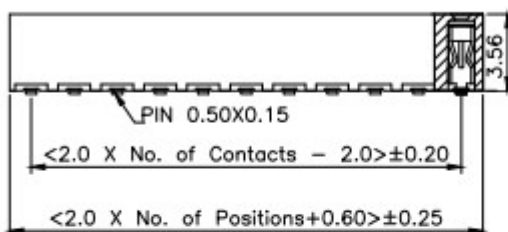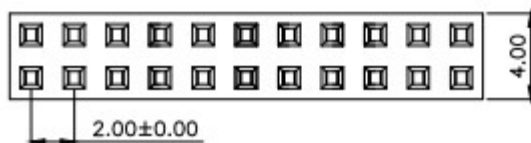

PS:Suggested Mating Pin Length:2.5~2.8mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.00	11	20.00	22.00	20	38.00	40.00	29	56.00	58.00
03	4.00	6.00	12	22.00	24.00	21	40.00	42.00	30	58.00	60.00
04	6.00	8.00	13	24.00	26.00	22	42.00	44.00	31	60.00	62.00
05	8.00	10.00	14	26.00	28.00	23	44.00	46.00	32	62.00	64.00
06	10.00	12.00	15	28.00	30.00	24	46.00	48.00	33	64.00	66.00
07	12.00	14.00	16	30.00	32.00	25	48.00	50.00	34	66.00	68.00
08	14.00	16.00	17	32.00	34.00	26	50.00	52.00	35	68.00	70.00
09	16.00	18.00	18	34.00	36.00	27	52.00	54.00			
10	18.00	20.00	19	36.00	38.00	28	54.00	56.00			