


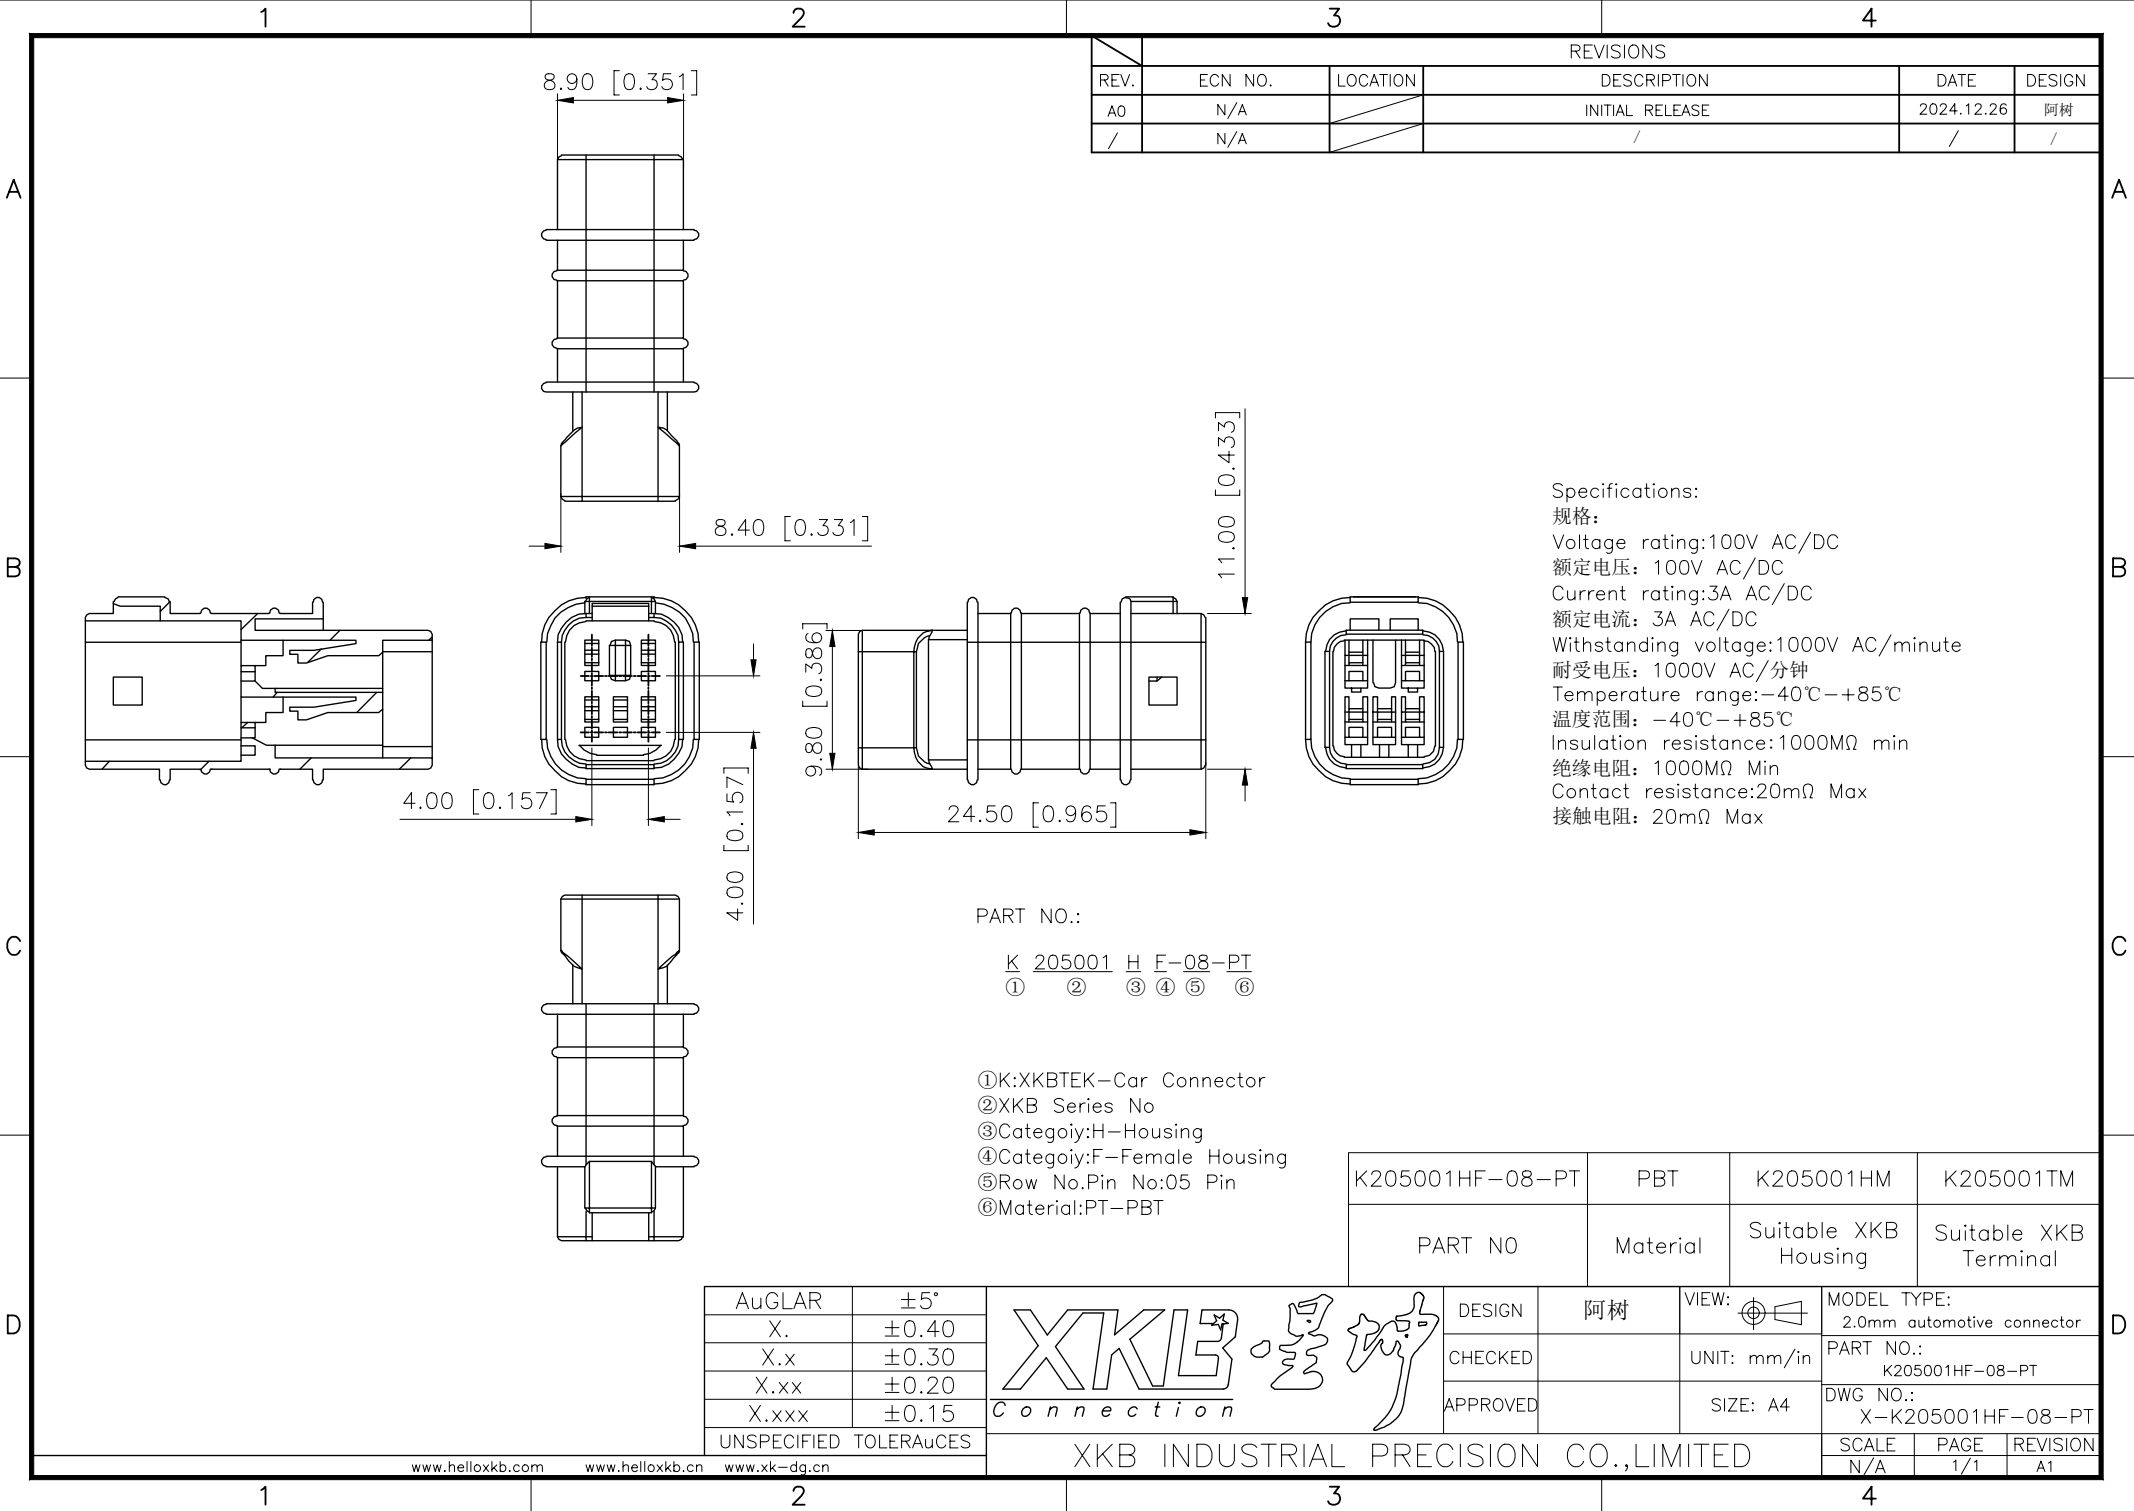

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.12.26	阿树
/	N/A		/	/	/

Specifications:
规格:
Voltage rating:100V AC/DC
额定电压: 100V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range: -40℃ - +85℃
温度范围: -40℃ - +85℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

PART NO.:
K 205001 H F-08-PT
① ② ③ ④ ⑤ ⑥

①K:XKBTEK-Car Connector
②XKB Series No
③Category:H-Housing
④Category:F-Female Housing
⑤Row No.Pin No:05 Pin
⑥Material:PT-PBT

K205001HF-08-PT	PBT	K205001HM	K205001TM
PART NO	Material	Suitable XKB Housing	Suitable XKB Terminal

AuGLAR	±5°		DESIGN	阿树	VIEW: 	MODEL TYPE: 2.0mm automotive connector		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: K205001HF-08-PT		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.: X-K205001HF-08-PT		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCE		XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
www.xk-dg.cn						N/A	1/1	A1