


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2025.2.19	阿树
/	N/A		/	/	/

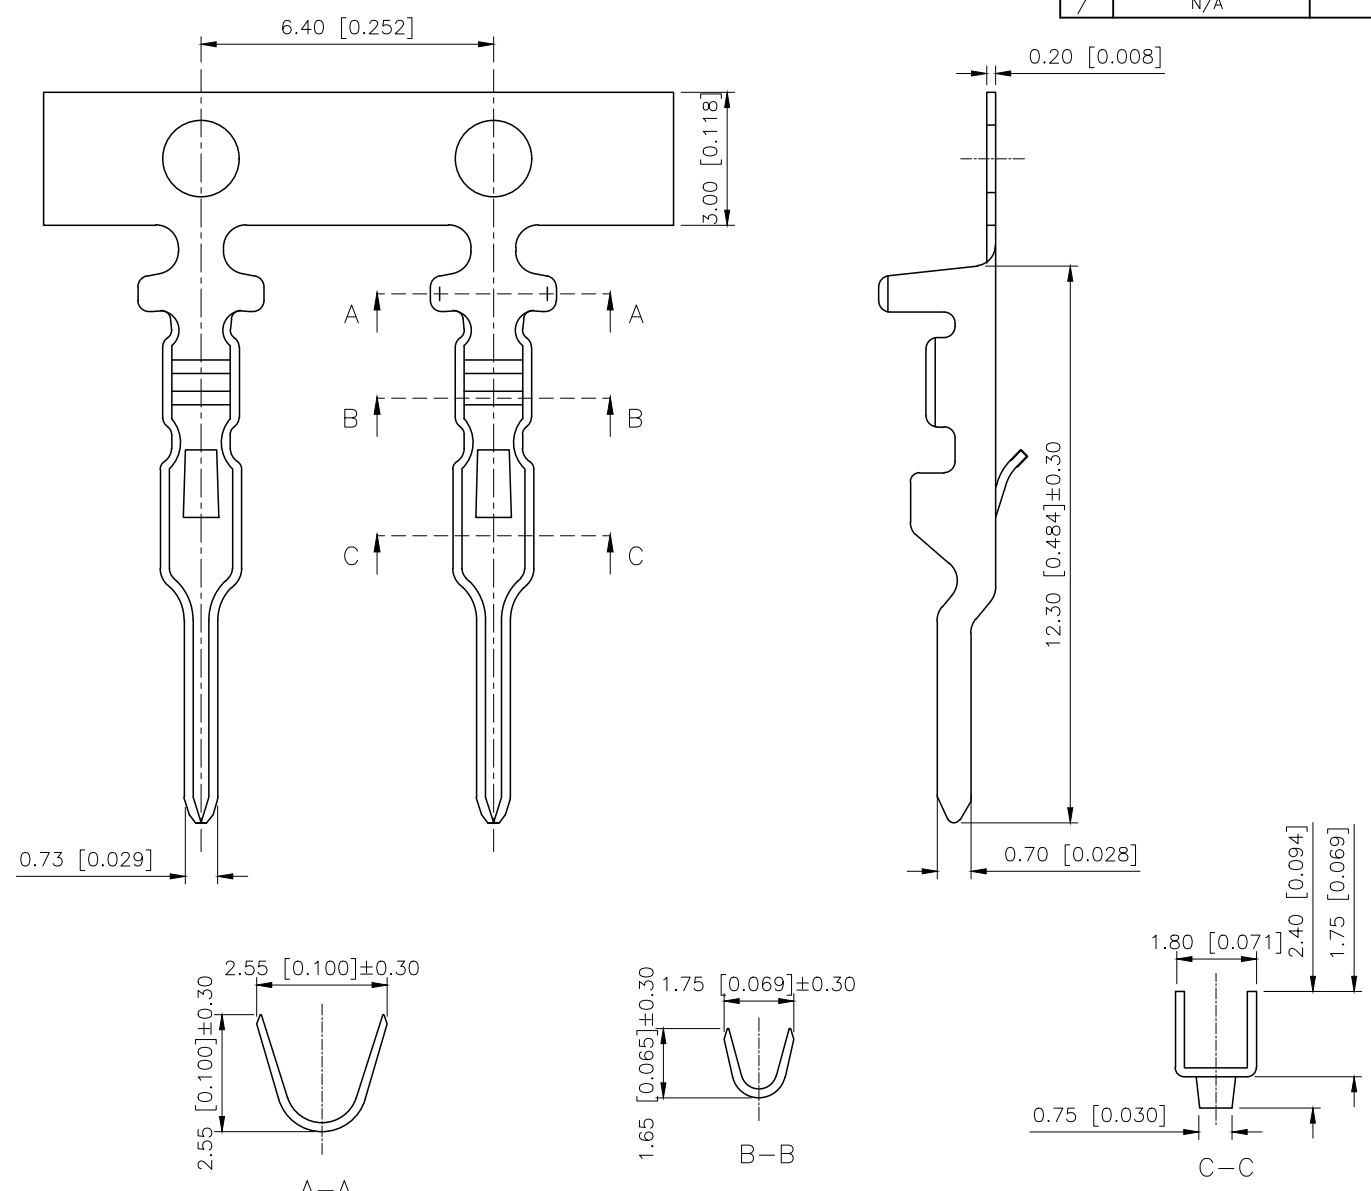


Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-25℃-+85℃
温度范围: -25℃-+85℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

PART NO.:
X8821 I M-P SN
① ② ③ ④ ⑤

①Series Number.
②Category: T-terminal
③Welding Board Angle: M-Male
④Material:P-Phosphor Bronze
⑤Plating:SN-Tin Plated

X8821TM-PSN	Phosphor Bronze	AWG#30~24	X8821H
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

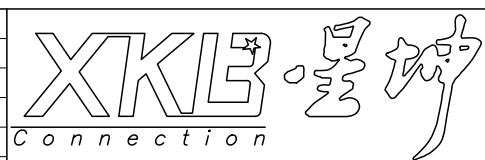

DESIGN	阿树	VIEW:	MODEL TYPE: 2.50 mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X8821TM-PSN
APPROVED		SIZE: A4	DWG NO.: