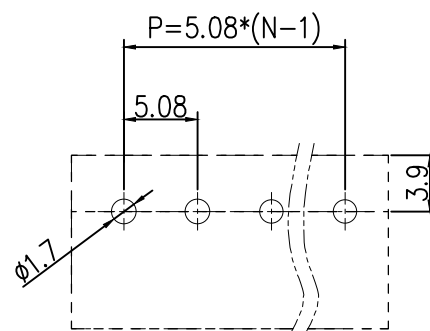

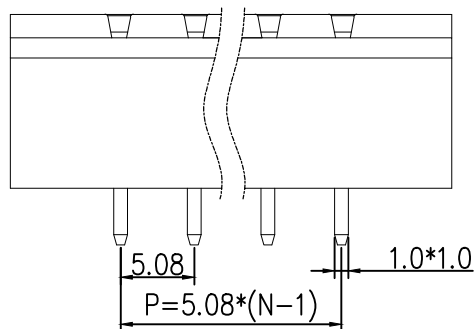
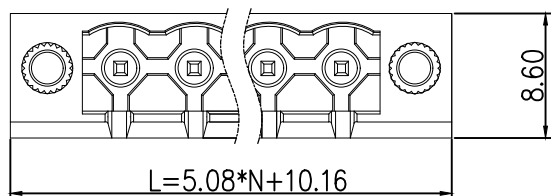
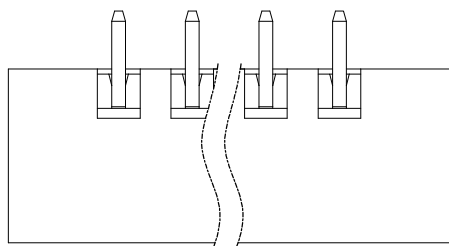


标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

PCB LAYOUT

Materials and Electroplating

- ①. Plastic body: PA66
②. Solder pin: copper, nickel tin plated
③. Nut: Copper, Nickel Plated

Electrical performance

Rated voltage: 300V

Rated current: 15A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min

mechanical properties

Temperature range: -40 °C~+105 °C

Instantaneous temperature: +250 °C, 5 seconds

2	插针	铜	镀镍锡	
1	基座	PA66	绿色	
序号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE	接线端子
			料 号 PART NO	HC-JXDZVM-5.08-2P
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1	
公差参数		单 位 UNIT	MM	
2-6P ±0.10 ±0.20 X.xxx ±0.15		张 数 PART NO	1 OF 1	
7-12P ±0.20 ±0.30 X.xx ±0.25		审 核 CHECKED	夏操云	
13-18P ±0.25 ±0.40 X.x ±0.35		版 本 REV	A	
		批 准 APPROVE	赵亮亮	