







8P~15P

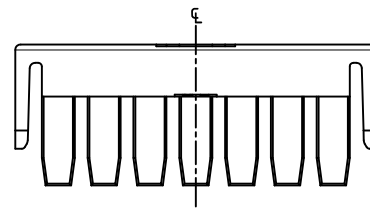

2P~7P

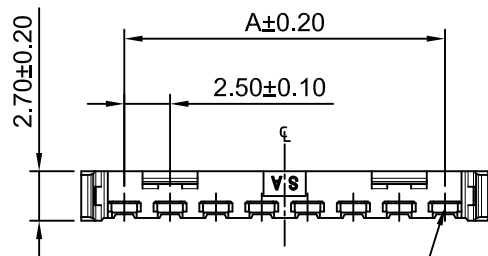

Circuit 1

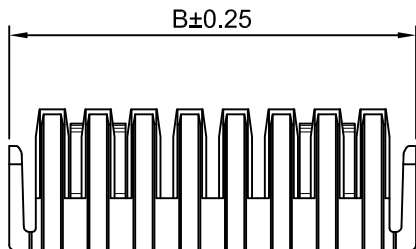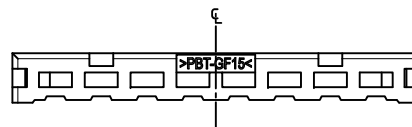

Ordering Information:

A2508SC-XP - ***
1 2

1.Part NO.

2.Color:

(Blank): Black

GR: Gray

SPECIFICATIONS:

Current Rating: 5A AC,DC (Max.)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: PBT+15%G.F,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508SC-2P	2.50	7.20
A2508SC-3P	5.00	9.70
A2508SC-4P	7.50	12.20
A2508SC-5P	10.00	14.70
A2508SC-6P	12.50	17.20
A2508SC-7P	15.00	19.70
A2508SC-8P	17.50	22.20
A2508SC-9P	20.00	24.70
A2508SC-10P	22.50	27.20
A2508SC-11P	25.00	29.70
A2508SC-12P	27.50	32.20
A2508SC-13P	30.00	34.70
A2508SC-14P	32.50	37.20
A2508SC-15P	35.00	39.70

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
DRWN	CHK'D	APPR
Chengbiao Ye	Djankui Wan	Jack Yin

TITLE
2.50mm PITCH
TPA

A2	CHANGE THE DRAWING	2023.01.14
A1	CHANGE THE DRAWING	2021.03.02
A0	NEW RELEASE	2020.06.10
REV	DESCRIPTION	DATE

General Tolerances
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE
PROJECTION

DRAWING NO.	REV
A2508SC-XP	A2