



MULTI-FUNCTION TIMER CONTACT 230V AC 4A 1
CHANGEOVER ACTIVATION 12-230 V CA/CC

Similar to image

Technical data:		
type of voltage		AC/DC
Width	mm	18
Height	mm	90
Depth	mm	64
Adjustable time / initial value	s	0.02
Design of the electrical connection / for auxiliary and control current circuit		screw-type terminals
Control supply voltage		
• for DC / rated value		
• minimum	V	12
• maximum	V	240
• at 60 Hz / at AC / rated value / minimum	V	12
• at 50 Hz / at AC / rated value / maximum	V	240
• at 60 Hz / at AC / rated value / maximum	V	240
• at 50 Hz / at AC / rated value / minimum	V	12

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
 GOST	 EG-Konf.	Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT3185/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3185

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

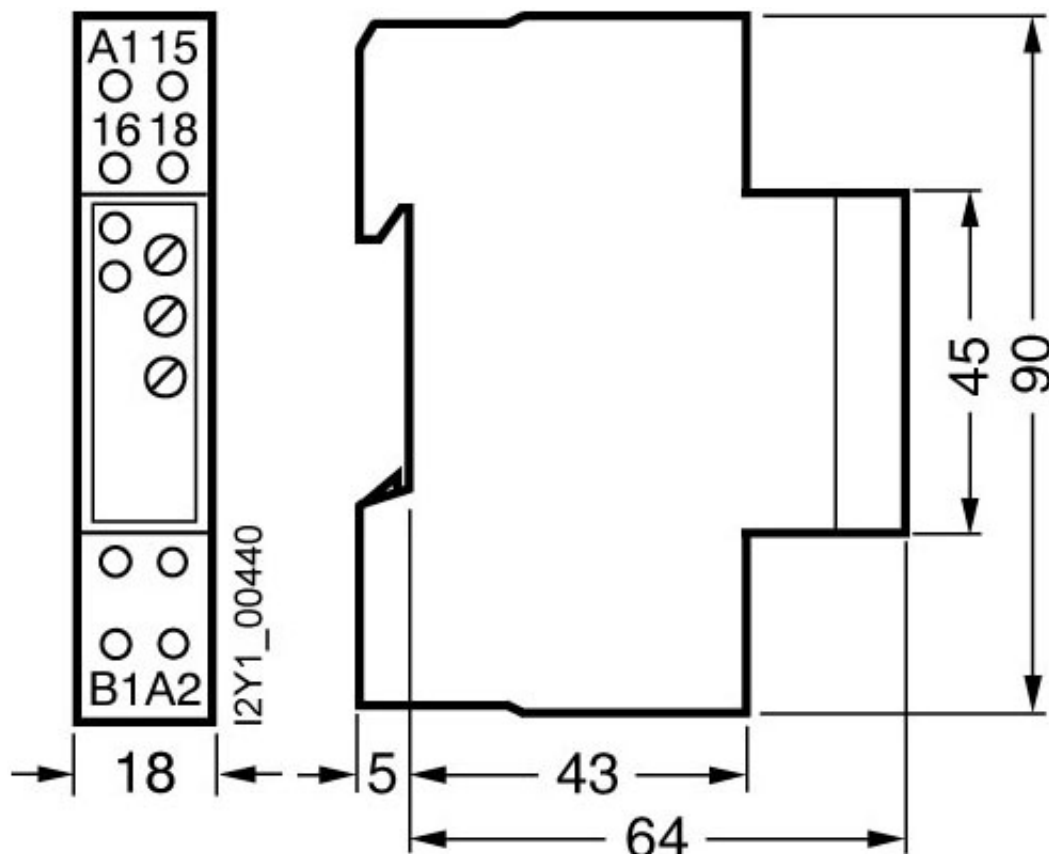

last change:

Oct 29, 2012