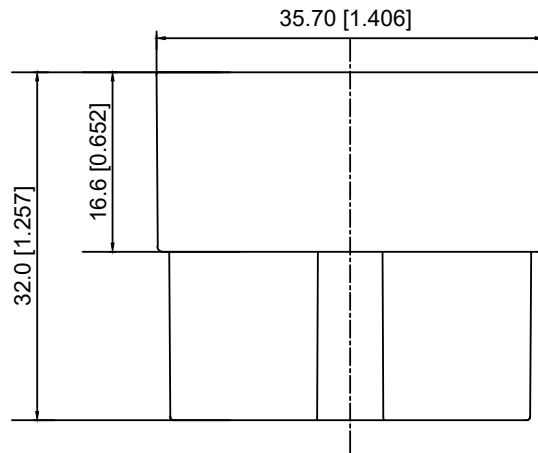
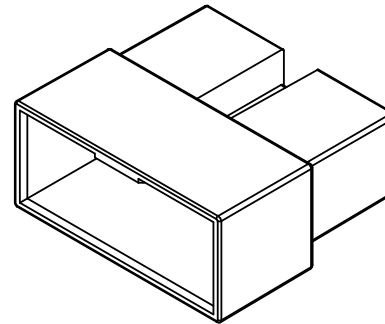
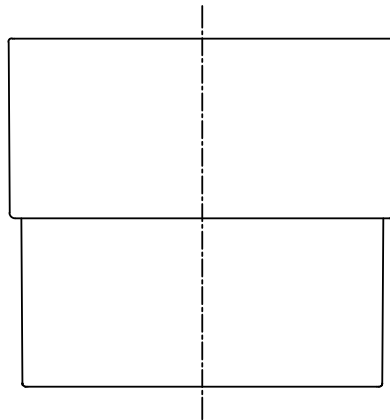
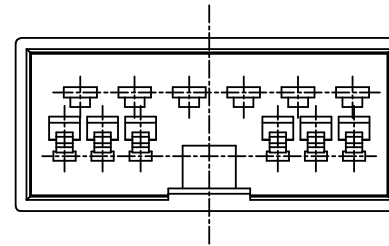
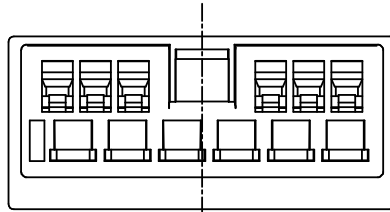


Current rating:3A AC/DC
额定电流: 3A AC/DC
Temperature range:-40℃-+125℃
温度范围: -40℃-+125℃

K 284162 H F - 12 - N0 W
① ② ③ ④ ⑤ ⑥ ⑦

- 1.K: XKBTEK-Car Connector
- 2.XKB Series No
- 3.Category:H-Housing
- 4.Category:F-Female Housing
- 5.Row No.Pin No:XX-12 Pin
- 6.Material:N0-PA66 UL94V-0
- 7.Color:W-White ; G-Green

K284162HF-12-N0W	PA66	K284162HF	K284162HF
PART	Material	Suitable XKB Housing	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE: 5.0mmautomotive connector
DWN		VIEW:	PART NO.: K284162HF-12-N0W
CHKD		UNIT: mm/in	DWG NO.: X-K284162HF-12-N0W
APPD		SIZE: A4	
			WEIGHT
			SHEET
			REVISION
			1/1
			A0

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED