

Pitch: 2.00x2.00mm (0.079" x 0.079")
 Female Header Side Entry S.M.T Type

ELETE
 —Professional Connecting Solution—
 HFLDP51-Series


Specifications

Current Rating: 2.0 Ampere
 Insulation Resistance: 1000MΩ Min
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 LCP/NL6T


All material RoHS&Reach Compliant
 Halogen-free is available

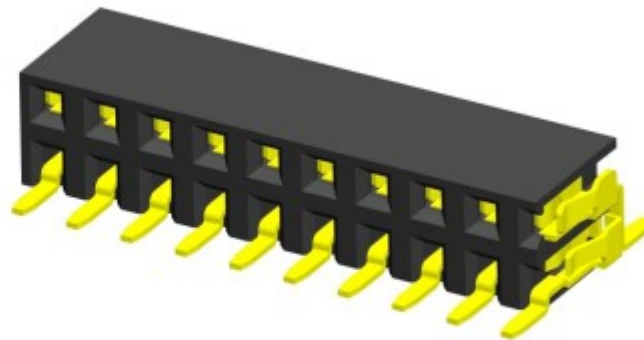

Mating with




HMLDSHXX





HMLDMHXX




HMLDR43




HMLDMXX






HMLDS43



HMLDPXX



HMLDRXX

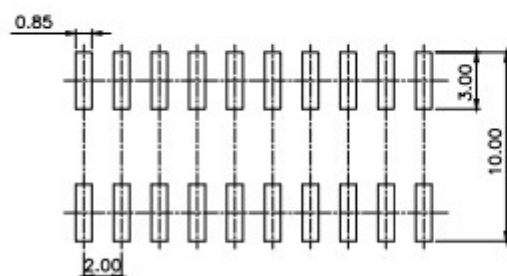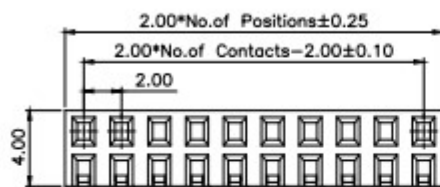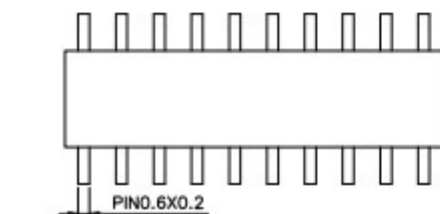

TOLERANCE: ±0.05, THICKNESS: 1.6mm
 RECOMMENDED PCB LAYOUT
 TOP VIEW

