




FRONT VIEW

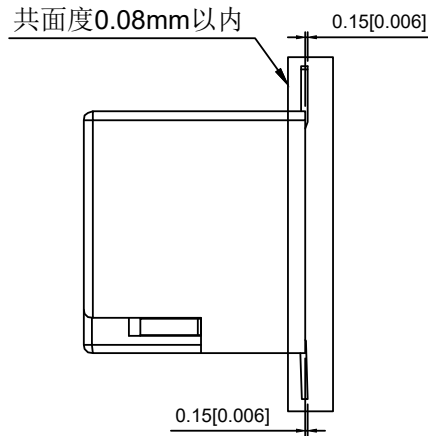


RIGHT SIDE VIEW

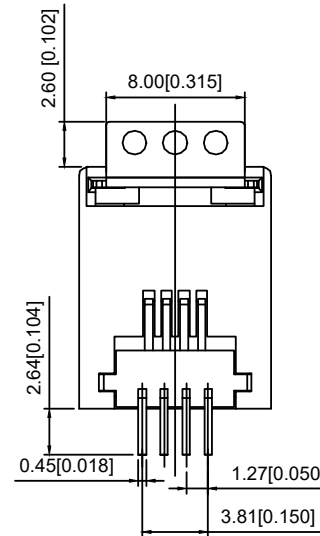


BACK VIEW



BOTTOM VIEW

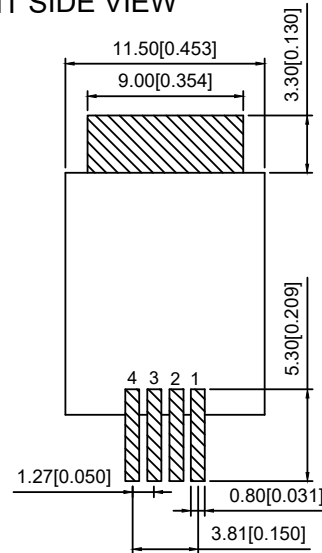RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

PCB SIDE TO PHY

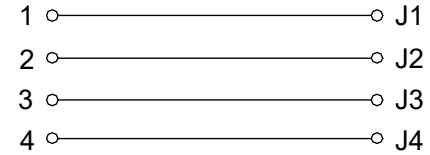

CABLE SIDE

XKB Connectivity

MATERIAL 材料:

HOUSING 外壳: LCP, UL94V-0, BLACK.

TERMINAL 端子: PHOSPHOR BRONZE T=0.35MM

GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN, 12.5MM/MINUTE.

INSERTION FORCE 插入力: 2.2KG.F MAX

RETENTION STRENGTH 保持力: 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL 电气:

VOLTAGE 电压: 125 VOLTS AC.

CURRENT RATING 电流额定值: 1.5AMP.

DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ, 1 MIN

INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN. INITIAL

AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE 接触电阻: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGLAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
Δx					16 < L ≤ 63 ±0.4
Δx					L > 63 ±0.5
REVISIONS					
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND		SCALE: N/A	MODEL TYPE: RJ JACK
DWN		VIEW:	PART NO.: X35AKIWW6SB3009
CHKD		UNIT: mm/in	DWG NO.: X35AKIWW6SB3009
APPD		SIZE: A4	WEIGHT SHEET REVISION
			1/1 A0