

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-40℃-+85℃





温度范围: -40℃-+85℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:10mΩ Max

接触电阻: 10mΩ Max

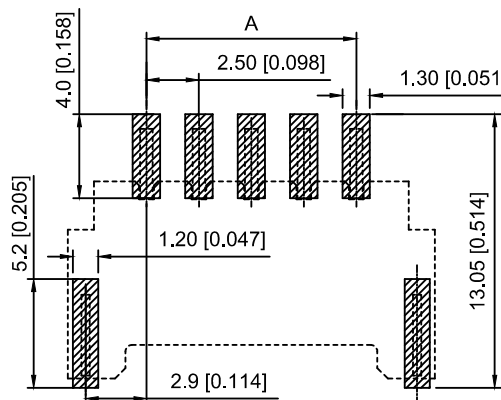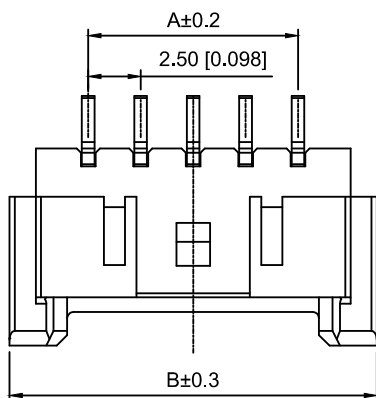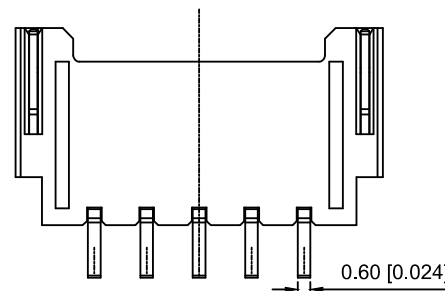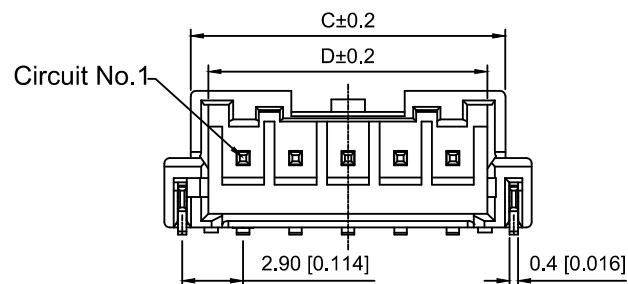

RECOMMENDED PCB LAYOUT

X2508 W R S - 04 - 9T SN
① ② ③ ④ ⑤ ⑥ ⑦

1.Series No

2.Category:W-Wafer

3.Welding Board Angle:R-Sright 90°

4.Welding Way:S-SMT

5.Row No.Pin No:XX-02~15P

6.Material:9T-PA9T UL94V-0 (BEIGE)

7.Plating:SN-Tin Plated

Poles	Dimensions(mm)				Poles	Dimensions(mm)			
	A	B	C	D		A	B	C	D
02	2.50	10.00	7.50	5.80	09	20.00	27.50	25.00	23.30
03	5.00	12.50	10.00	8.30	10	22.50	30.00	27.50	25.80
04	7.50	15.00	12.50	10.80	11	25.00	32.50	30.00	28.30
05	10.00	17.50	15.00	13.30	12	27.50	35.00	32.50	30.80
06	12.50	20.00	17.50	15.80	13	30.00	37.50	35.00	33.30
07	15.00	22.50	20.00	18.30	14	32.50	40.00	37.50	35.80
08	17.50	25.00	22.50	20.80	15	35.00	42.50	40.00	38.30

X2508WRS-04-9TSN	PA9T	Brass	X2508H
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND		SCALE: N/A	MODEL TYPE: 2.5mm Crimp Style Connector		
DWN		VIEW: 	PART NO.: X2508WRS-04-9TSN		
CHKD		UNIT: mm/in	DWG NO.: X-X2508WRS-04-9TSN		
APPD		SIZE: A4			
L PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK					L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED