
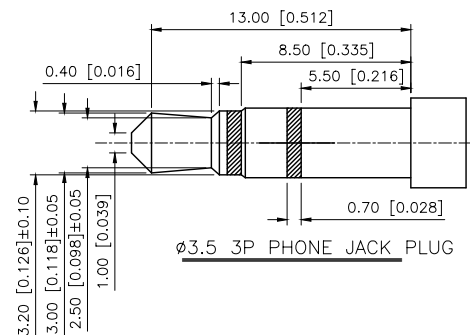
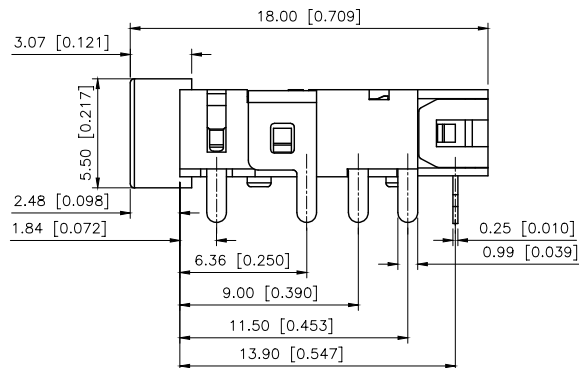
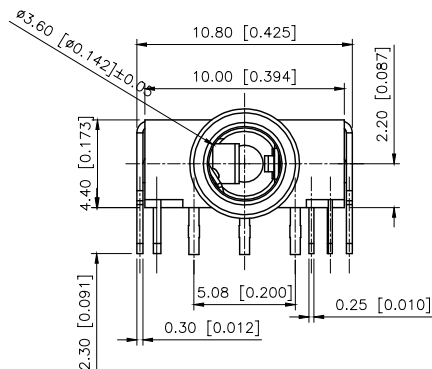
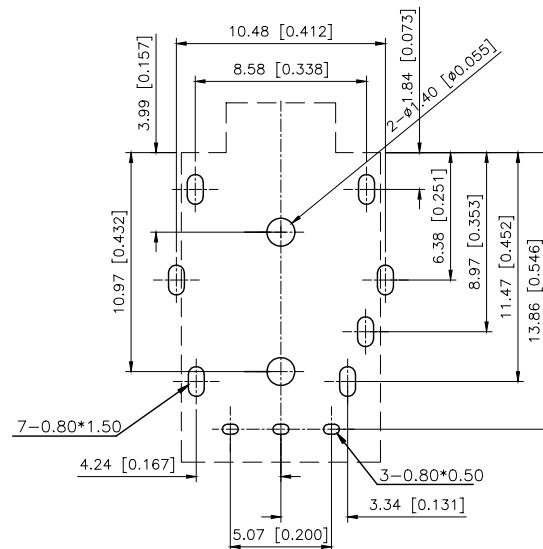
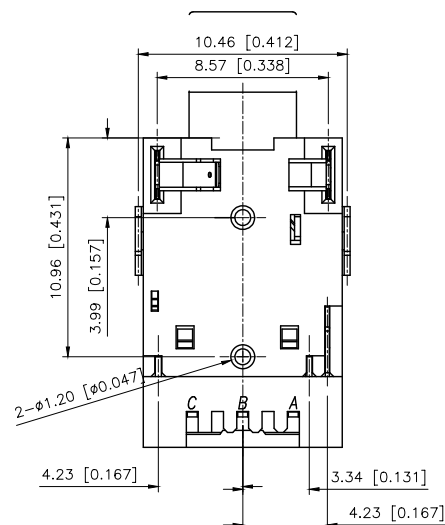


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.27	阿树




Ø3.5 3P PHONE JACK PLUG

PCB LAYOUT BOTTOM VIEW
TOLERANCES: ±0.05

SPECIFICATIONS:
ELECTRICAL CHARACTERISTICS:
1-1.RATING:20V, 1A Min.
1-2.CONTACT RESISTANCE
50 MILLIOHMS Max. FOR INITIAL
80 MILLIOHMS MEX AFTER 5000 CYCLES
1-3.INSULATION RESISTANCE:100 MEGAOHMS Min.
BY 500V DC AFTER 1 MINUTE.
1-4 DIELECTRIC WITHSTANDING VOLTAGE500V
RMS AFTER 1 MINUTE
2.MECHANICAL CHARACTERISTICS:
2-1.INSERTION FORCE:0.3~3.0 KGF(2.94~29.4N)
2-2. WITHDRAWAL FORCE:0.3~3.0KGF(2.94~29.4N)
3. LIFE TEST:5,000 CYCLES MIN.

Model No.	PJ-359H-X
Schematic	



No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)
⑩	Drive ic tx	1	N/A	N/A
⑨	Cover 2	1	Hich temp. Thermoplastic	Black
⑧	Cover 1	1	Hich temp. Thermoplastic	Black
⑦	HOUSING	1	Hich temp. Thermoplastic	Black
⑥	Terminal 6#	1	Copper Alloy t=0.25	Au-Plated
⑤	Terminal 5#	1	Copper Alloy t=0.30	Au-Plated
④	Terminal 4#	1	Copper Alloy t=0.20	Au-Plated
③	Terminal 3#	1	Copper Alloy t=0.20	Au-Plated
②	Terminal 2#	1	Copper Alloy t=0.20	Au-Plated
①	Terminal 1#	1	Copper Alloy t=0.20	Au-Plated

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-397D
APPROVED		SIZE:	A4	DWG NO.:	

X-PJ-397D		
SCALE	PAGE	REVISION
N/A	1/1	A1