


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.17	阿树

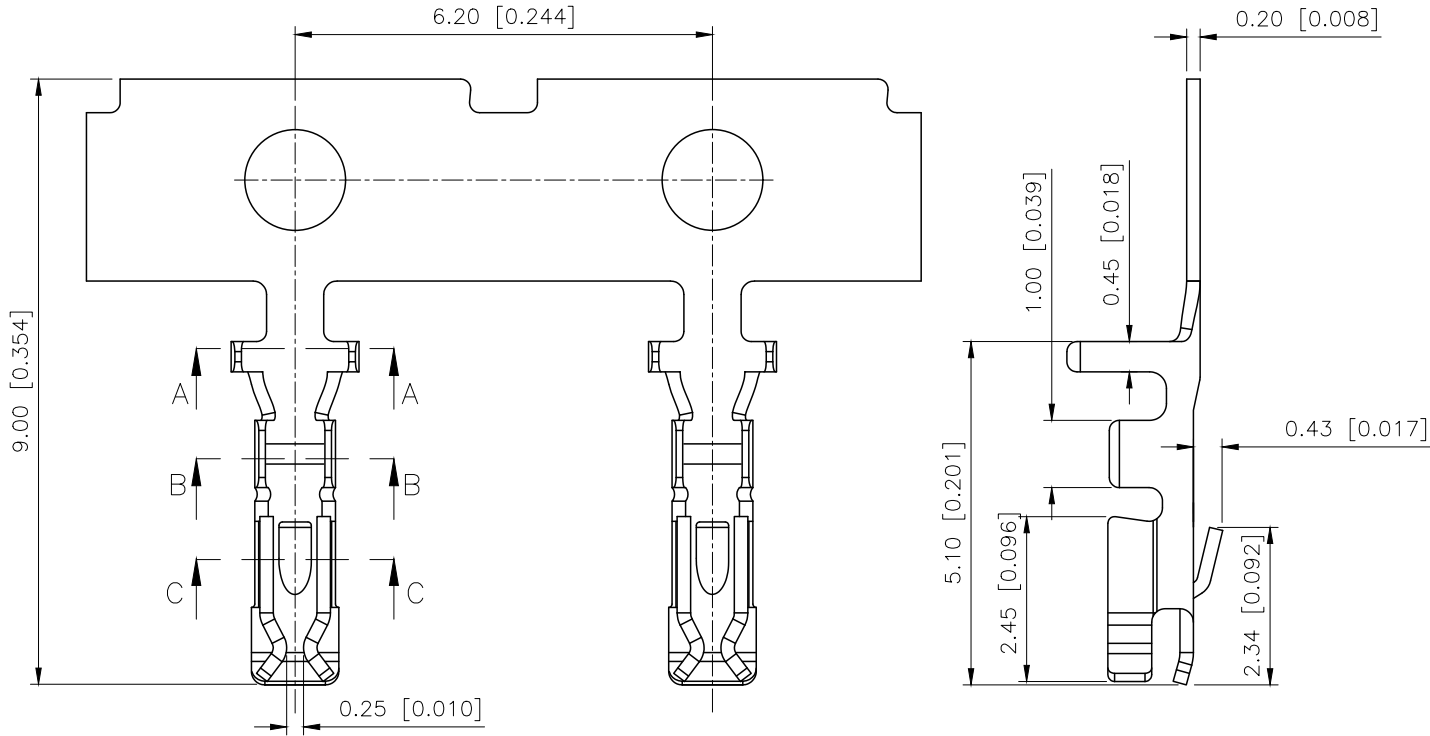

Specifications:
规格:
Voltage rating:350V AC/DC
额定电压: 350V AC/DC
Current rating:4A AC/DC
额定电流: 4A AC/DC
Withstanding voltage:1700V AC/minute
耐受电压: 1700V AC/分钟
Temperature range:-40℃-+125℃
温度范围: -40℃-+125℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:30mΩ Max
接触电阻: 30mΩ Max

PART NO.:

X1801 I-P SN
① ② ③ ④

- ①Series Number.
②Category: T-terminal
③Material: P-Phosphor Bronze
④Plating Category:
V01-GoldFlash(0.8u'')Over Nickel
SN-Tin Plating:80u''~120u''Over

SECTION:A-A
SCALE:1:1

SECTION:B-B
SCALE:1:1

SECTION:C-C
SCALE:1:1

X1801T-PSN	Phosphor Bronze	PlatingTin / Gold Flash	AWG#24~30 O.D1.5mm	X1801H	X1801W
PART NO	Material	Plating	Wire Range	Suitable XKB Housing	Suitable XKB Wafer

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.8mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X1801T-PSN
APPROVED		SIZE: A4	DWG NO.: