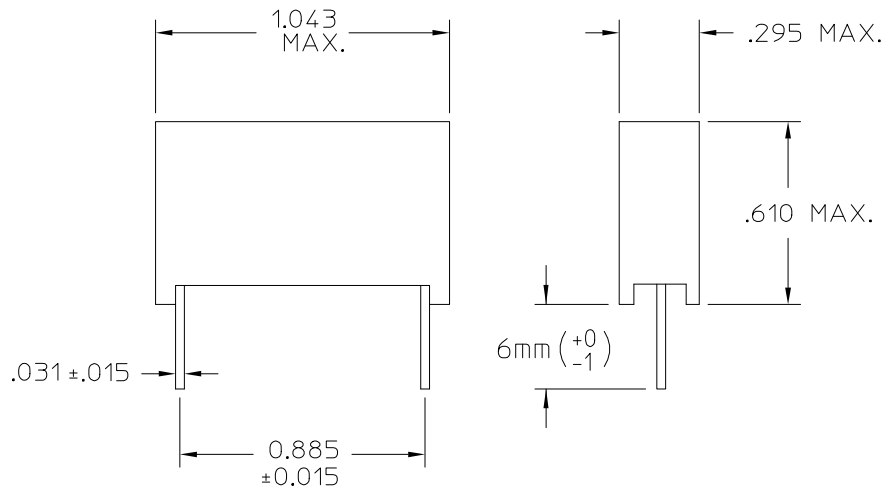


**VICOR CONFIDENTIAL**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HERewith IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
A	RELEASE PER ECO #01832	11/07/89	M L S
B	REVISED PER E020468 DPK	10/10/02	GCK
3	REVISED PER ECO Request E080622 REJH	03/28/08	EF





NOTES:

- 1: CAPACITORS - DIELECTRIC, POLYESTER-FILM.
- 2: INTERNATIONAL SAFETY AGENCY APPROVALS AND MARKINGS FROM: VDE, SEV, DEMKO, SEMKO, NEMKO, SETI, UL, IMQ, OVE.
3. RoHS COMPLIANT, LEAD FREE PER CST-0001 LATEST REVISION.

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE	250 .VAC, 50/60HZ
CAPACITANCE	.15uF, ±10%
CLASS	X2.
DISSIPATION FACTOR	1% MEASURED AT 1 kHz.
MAX. PULSE RATE TIME	Du/Dt ACC.TO VDE 5651 100 V /uSEC.

DRAWN BY <i>J CLEMENZI</i>	DATE 10/89	 <b>AC-CAPACITOR</b> <i>.15uF, 250VAC, (X2)</i>		
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES - TOLERANCES ARE:            FRACTIONS DECIMALS ANGLES            ±1/64 .XX= ±.01 ±1°            .XXX=±.005</small>				
THIRD ANGLE PROJECTION 	SIZE <b>B</b>	FSCM NO. <b>67131</b>	DWG NO <b>03269</b>	REV <b>3</b>
DO NOT SCALE DRAWING	SCALE	NTS	SHEET 1 OF 1	