NOTES:

Plunger: Brass, 20μ" MIN Au over, 50μ" MIN Ni over
Barrel : Brass, 3μ" ,MIN Au over, 50μ" MIN Ni over
Spring : Stainless Steel

Mechanical Characteristics:

Spring Force : 70g ± 20% at Working Length
Mechanical Life : 1,000,000 cycle

Electrical Characteristics:

Current Rating : 2A
Contact Resistance : 20 mΩ Max

Operating Temperature range : -55~125° C

Packing: PE Bag

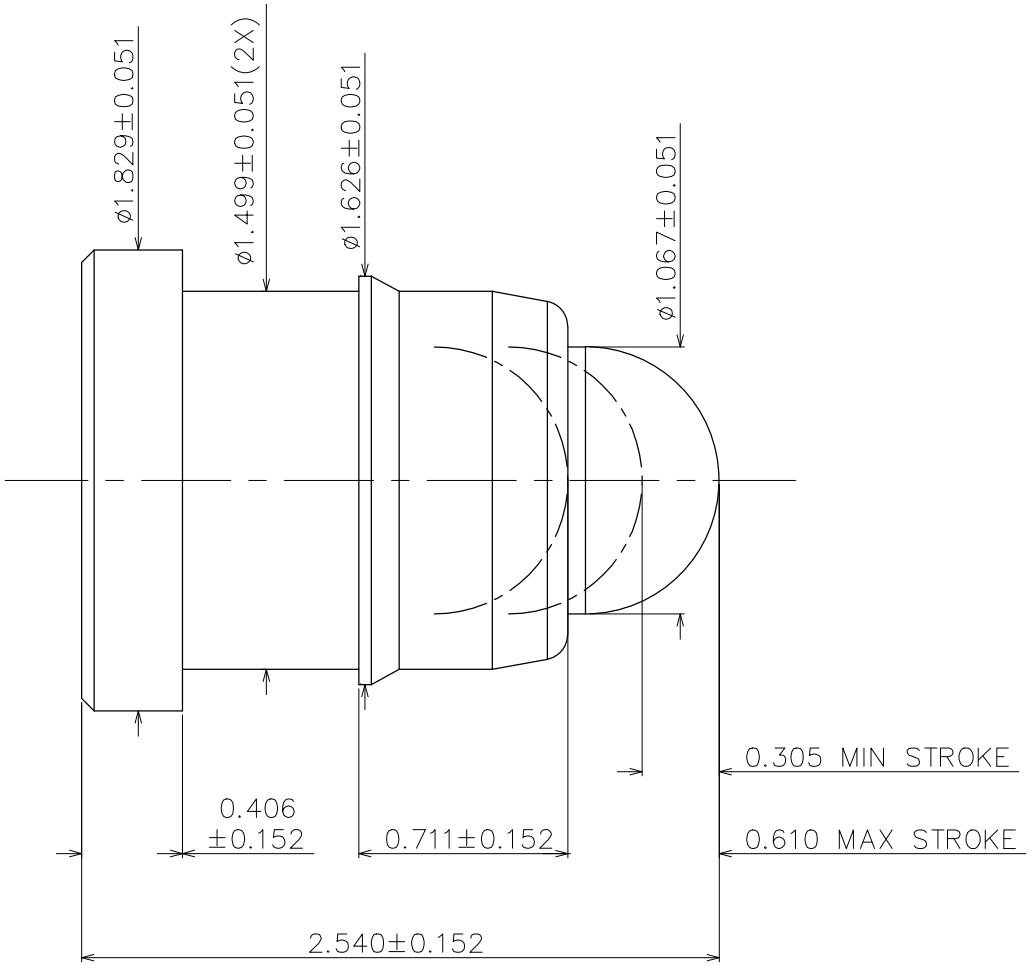

RoHS compliant

Unit: mm

Scale	Free
TOLERANCE	
X.X	±0.20
X.XX	±0.10
X.XXX	±0.08
DIM	TOL
Angle	±3°
Angle	TOL

Id.	Modification	Date	Name
0	Drawn	28.03.2018	Tom

	Date	Name
Drawn	28.03.2018	Tom
Approved	28.03.2018	Winnie

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No. A-CSL-S-020-B1

Drawing-No. ASS 7898 CO rev00

Replace | Sheet

SV4444