
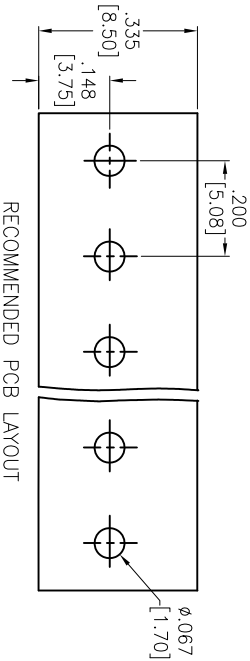
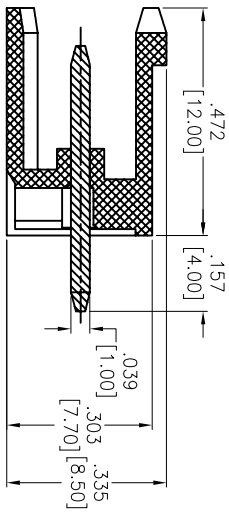


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/16/13	

APPROVED: _____
DATE: _____ TITLE: _____

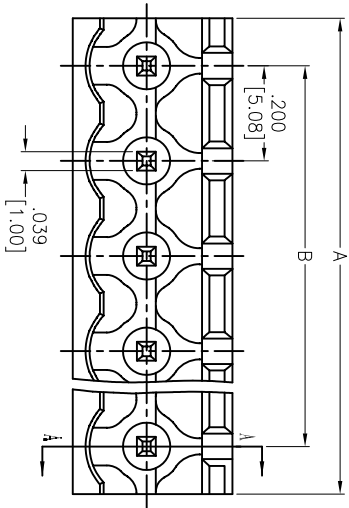

SPECIFICATIONS:

Material: Insulator: PA66, rated UL 94V-0
Insulator color: Green
Contact: Brass, Tin plated
Electrical:
Operation voltage: 300 VAC max
Current rating: 15 Amps
Contact resistance: 20 Mohms max
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

Positions: 02 thru 24
A = .200 [5.08] x No. of Positions
B = .200 [5.08] x No. of Spoces

UNLESS OTHERWISE SPECIFIED			
ALL DIMENSIONS ARE MM [INCHES]			
TOLERANCES: EXCEPT AS NOTED			
INCHES			
HOLD			
.X ± .10		ØX ± .10	
.XX ± .020		ØXX ± .015	
.XXX ± .015		ØXXX ± .010	
APPROVALS		DATE	
DRAWN		AY	
CHECKED		NP	
APPROVED			
EURO BLOCK, .200 [5.08] PITCH, VERTICAL			
TITLE			
ADAM TECH			
909 Rahway Avenue, Union, NJ 07083			
Phone: 908-687-5000 Fax: 908-687-5710			
SIZE		PART NO.	
X		EBPA-XX-D	
REF: S00067C		SCALE: NTS	
SHEET 1		OF 1	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

