




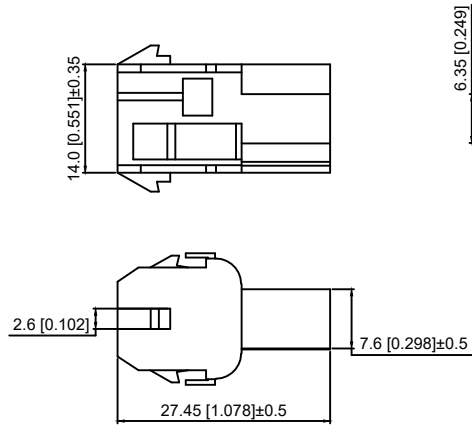


02Pin

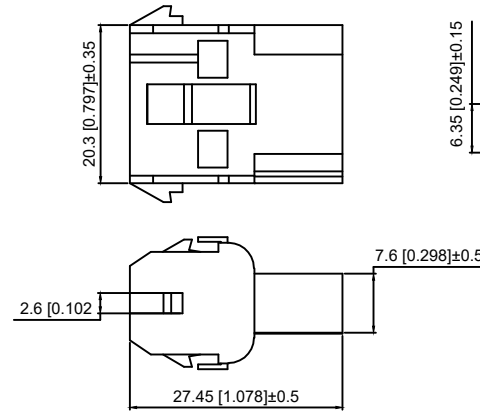

03Pin

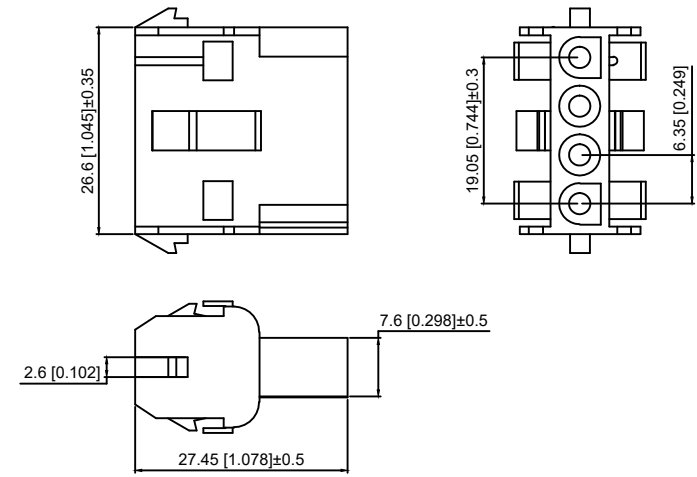

04Pin

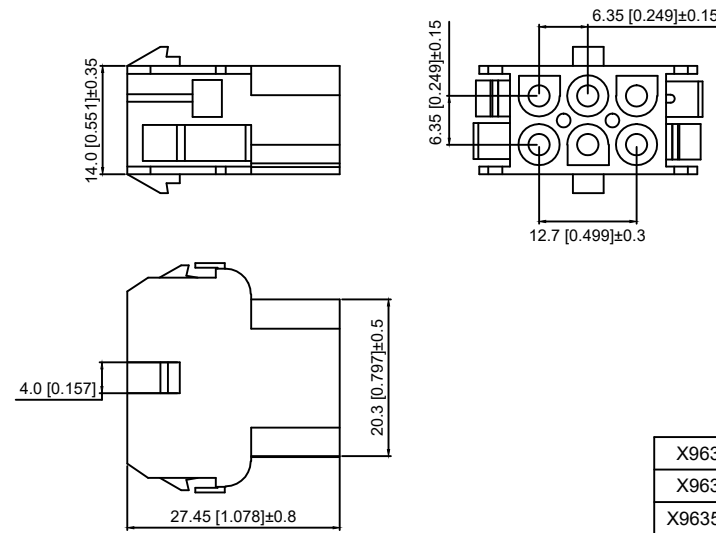

2x03Pin

Specifications:

规格:

Voltage rating:300V AC/DC
额定电压: 300V AC/DC
Current rating:13A AC/DC
额定电流: 13A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:-25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

X9635 H F - 02 - N2

① ② ③ ④ ⑤

- 1.Series No
- 2.Category:H-HSG
- 3.Category:F-Female Housing
- 4.Row No.Pin No:XX-02~04Pin or 2x03Pin
- 5.Material:N0-Nylon UL94V-0
N2-Nylon UL94V-2 (Natural)

X9635HF-02-N0	Nylon 66 UL94V-0	X9635HM	X9635TM
X9635HF-02-N2	Nylon 66 UL94V-2		
X9635HF-2x02-N0	Nylon 66 UL94V-0		
X9635HF-2x02-N2	Nylon 66 UL94V-2		
PART N0	Material	Suitable XKB Housing	Suitable XKB Terminal

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 6.35mm Crimp Style Connector		
DWN		VIEW: 	PART NO.: X9635HF-02-N2		
CHKD		UNIT: mm/in	DWG NO.: X-X9635HF-02-N2		
APPD		SIZE: A4			
PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0