

Actuator

17-030350

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-030350>

Your product:



17-030350 Actuator

FRONT

Front dimension:	Ø 7 mm
Front form:	round
Front bezel material:	Metal
Reflector:	Metal, polished chromium-plated, internal

MOUNTING

Mounting cut-out:	Ø 6 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Red
-----------------------------	-----

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V AC/DC ±10 %
Operation current:	15 mA ±15 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	8 mcd

MECHANICAL CHARATERISTIC

Tightening torque: Fixing nut max. 0.2 Nm
Terminal: Plug-in terminal, 2 x 0.5 mm
Weight: 0.003 kg

AMBIENT CONDITION

IP Protection: IP40 front side, IP65 front side, according to IEC 60529
Operating temperature: - 20 °C ... + 60 °C
Storage temperature: - 25 °C ... + 80 °C

CERTIFICATE

Approbations: UL
Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.


Kind of illumination: Single-LED

Short Description: Actuator, Ø 6 mm, Ø 7 mm, round, Metal, Plug-in terminal, 2 x 0.5 mm, Red


Mounting cut-outs:

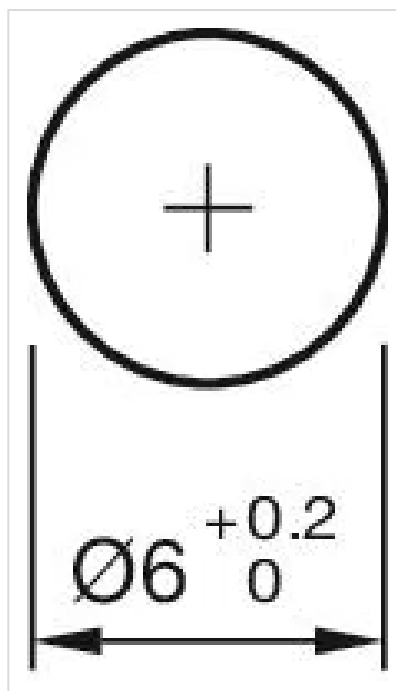

Wiring diagrams:

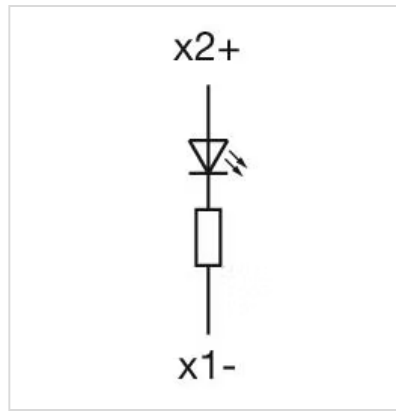

Dimension drawings:

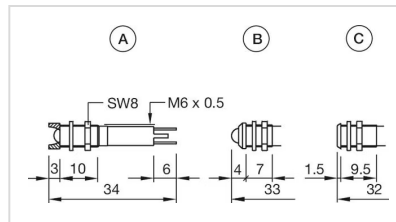

A = interior
B = exterior
C = superflat