

目 录 MAPX	变更内容 MODIFICATION	日期 DATE

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000M Ω Min.

Contact Resistance:30 M Ω Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range: -35°C to +85°C

Insulator color: Black/White

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated




Mechanical:

Mating Force: 3.5KG MAX

Umating Force: 0.7 KG MIN.

Contact finish:

- 01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

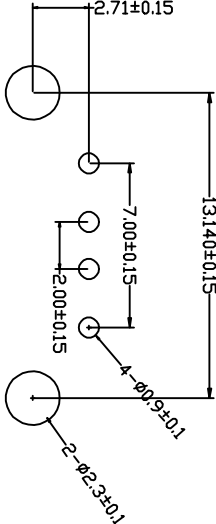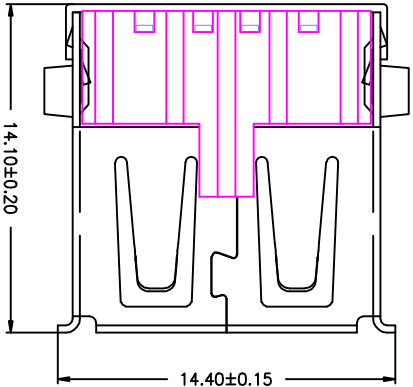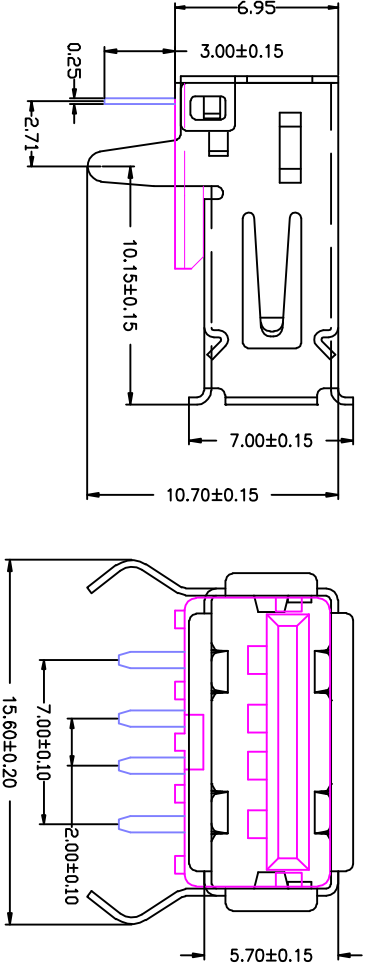

RBCMMENBDB P.C.B PATTRBN LAYD UT

备注：侧弹分为外弹与内弹

产品图

PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表				单位				制图				产品序号			
TOLERANCE UNLESS OTHERWISE				UNITS				DRAWING				PROPERTY DATA NO.			
X				±0.25				X				±5"			
X				±0.20				X				±2"			
XX				±0.15				XX				±1"			
XXX				±0.10				XXX				±0.5"			
DATE				2008/10/20				APPRO				VIR			
审核				雷永健				审核				雷永健			
比例				1:1				比例				1:1			
SCALE				X				SCALE				X			
X				±0.25				X				±5"			
X				±0.20				X				±2"			
XX				±0.15				XX				±1"			
XXX				±0.10				XXX				±0.5"			