
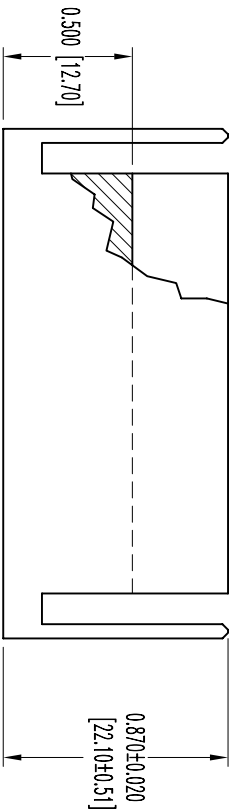



POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE THE MOST ACCURATE. THE USER EMPLOYING SUCH INFORMATION AT HIS OWN DISCRETION ASSUMES ALL LIABILITY FOR RESULTS OBTAINED OR INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
10-18-06	NC	ECO 26891		YK	


SK8075

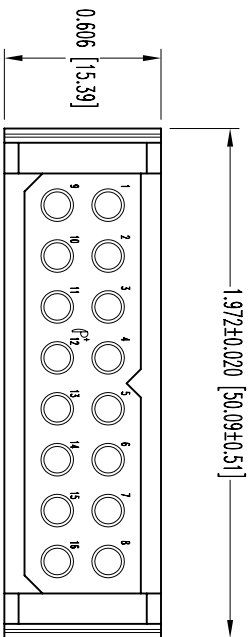

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR - GLASS FILLED PESTYESTER, UL 94V-0, COLOR BLUE.
 2. ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE - 5 G OHMS PER IEC 512-2, TEST 3d, METHOD A.
WORKING VOLTAGE - 600 VAC.
 3. TEMPERATURE RANGE -55°C TO +125°C.
 4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
 5. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com



DECIMAL TOL.
± 0.015 [0.38]

PCS SERIES
SCALE N.T.S.
DRAWN BY YK
APPROVED BY

TITLE
PLB16M0000/AA

ANGULAR TOL.
± 5°

DATE
10-18-06

DRAWING NUMBER
SK8075

REV.
NC