
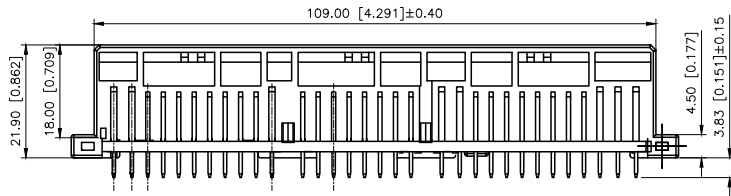

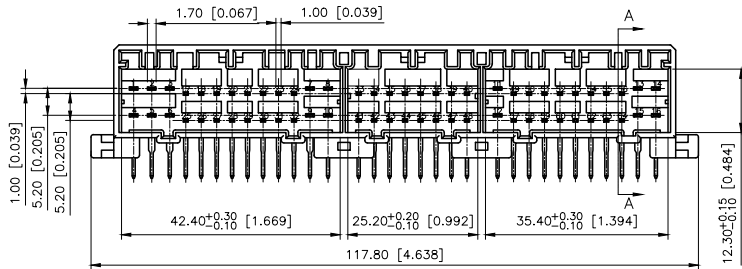
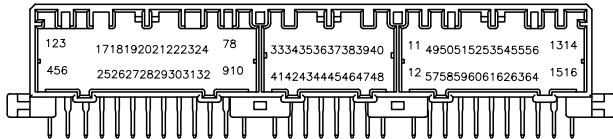



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X5	尺寸变更, 图面升级整理图面	2024.12.28	阿树



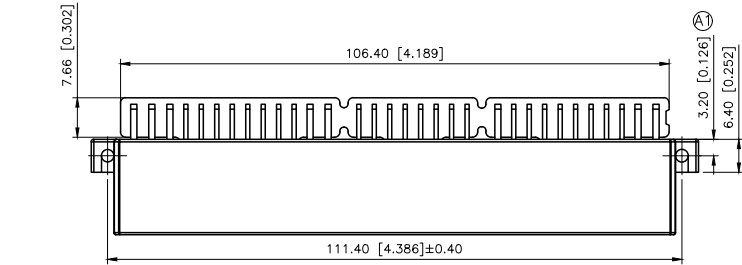


Current rating:25A AC/DC
额定电流: 25A AC/DC
Temperature range:-40℃~+125℃
温度范围: -40℃~+125℃

PART NO.:

K 178760 W R-2x32-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①K:XKBTEK-Car Connector
②XKB Series No
③Category:W-Wafer
④Welding Board Range:R-Stright 90°
⑤Row No.Pin No:2X32 Pin
⑥Material:PT-PBT 94V-0
⑦Plating:SN-Plated Tin

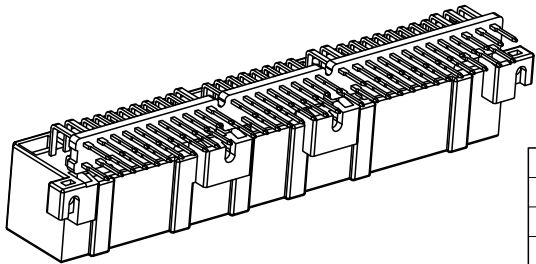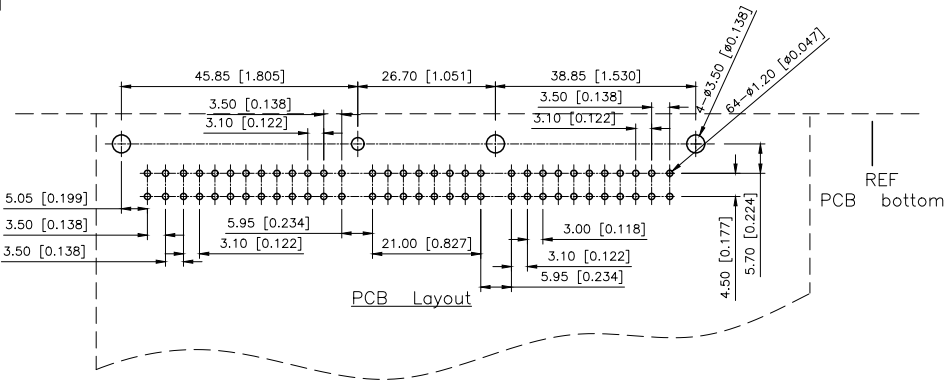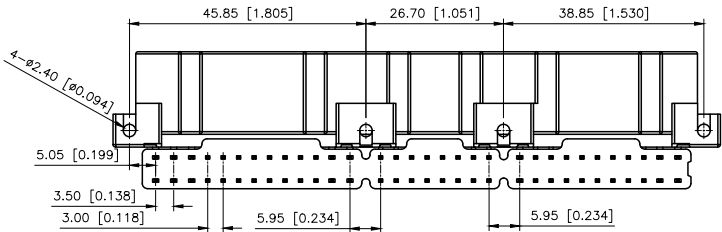

K178760WR-2XX-PTS	PBT	Brass	K178760H
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	3.0mm Automobile connector
PART NO.:	K178760WR-2x32-PTS
DWG NO.:	