

目 录	设 变 内 容	日 期
MAPX	MODIFICATION	DATE

NOTES:





Housing: Thermoplastics,UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000M Ω Min.
Contact Resistance: 30 M Ω Max.
Dielectric Withstanding Voltage:500W AC
Temperature Range:-35 $^{\circ}$ C to +85 $^{\circ}$ C
Insulator color: Black/White
Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated
Mechanical:

Mating Force: 3.5KG MAX
Umating Force: 0.7 KG MIN.

Contact finish:

- 01: Selective Gold Flash
- 02: Selective Gold 3U”
- 03: Selective Gold 5U”
- 04: Selective Gold 15U”
- 05: Selective Gold 30U”

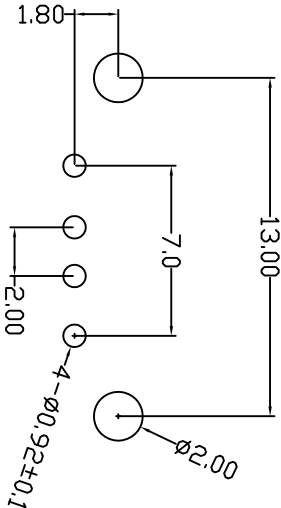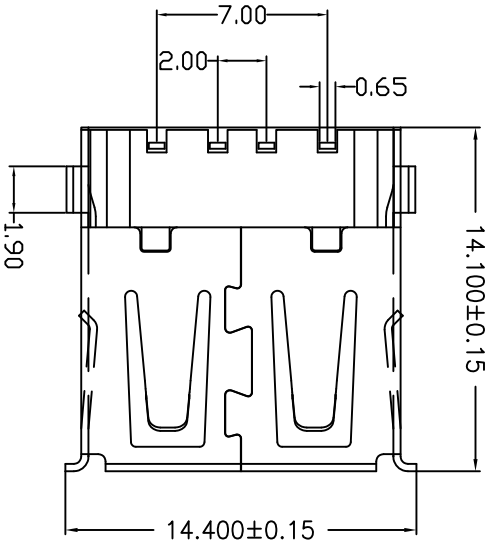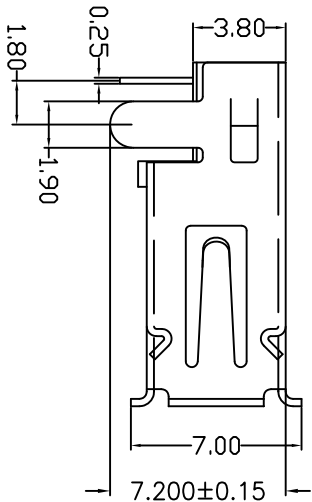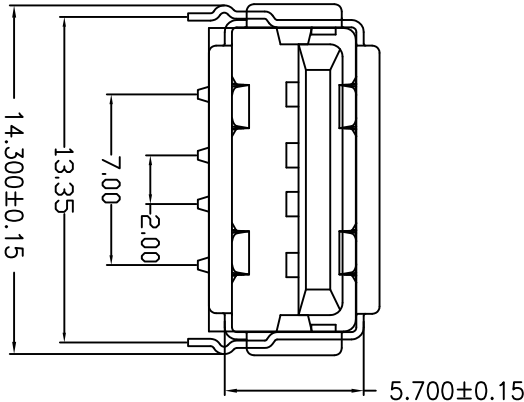

RECOMMENDED P.C.B LAYOUT

产 品 图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

公差一览表	单位	MM	制图	产品料号
X ±0.15	UNITS	±5°	DRAWING	905-151A2031D10100
X ±0.10	比例	1:1	审核	产品名称
XX ±0.05	SCALE	±2°	CHGD	AP90度沉板弯脚有边铁壳LCP本色
.XX ±0.03	日期	2009/10/20	批准	角法
.XXX ±0.5°	DATE		APPD	⊕ □ 放大
				VER
				A0

深圳市精拓金电子有限公司