

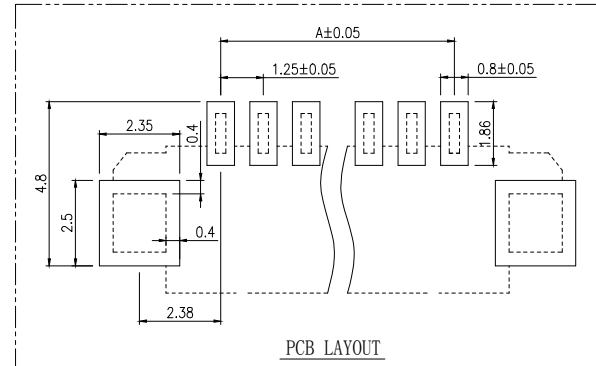


SECTION A-A

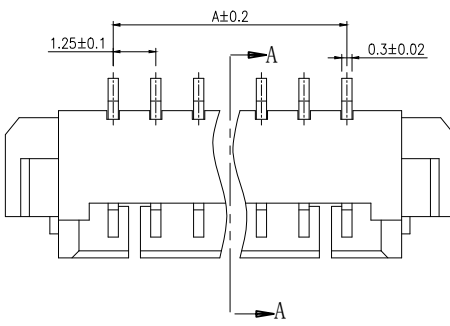


PCB LAYOUT

- SPECIFICATIONS
- 1、Current Rating: 1A AC, DC
  - 2、Voltage Rating: 125V AC, DC
  - 3、Temperatuer Range: -40℃ ~ +105℃
  - 4、Contact Resistance: 20mΩ Max
  - 5、Insulation Resistance: 500MΩ Min
  - 6、Withstanding Voltang: 500V AC/minute
  - 7、Material: Wafer LCP UL94-V0  
Pin Brass Tin-plated



Circuit	Part NO.	Dimensions mm			
		A	B	C	D
2	HC-1.25-2PWT	1.25	7.55	3.10	/
3	HC-1.25-3PWT	2.50	8.80	4.35	/
4	HC-1.25-4PWT	3.75	10.05	5.60	2.50
5	HC-1.25-5PWT	5.00	11.30	6.85	3.75
6	HC-1.25-6PWT	6.25	12.55	8.10	5.00
7	HC-1.25-7PWT	7.50	13.80	9.35	6.25
8	HC-1.25-8PWT	8.75	15.05	10.60	7.50
9	HC-1.25-9PWT	10.00	16.30	11.85	8.75
10	HC-1.25-10PWT	11.25	17.55	13.10	10.00
11	HC-1.25-11PWT	12.50	18.80	14.35	11.25
12	HC-1.25-12PWT	13.75	20.05	15.60	12.50
13	HC-1.25-13PWT	15.00	21.30	16.85	13.75
14	HC-1.25-14PWT	16.25	22.55	18.10	15.00
15	HC-1.25-15PWT	17.50	23.80	19.35	16.25
16	HC-1.25-16PWT	18.75	25.05	20.60	17.50

Ordering Information



序号	图号	名称	材料	数量	附件
3	③	接触件	黄铜	N	镀锡
2	②	焊片	黄铜	2	镀锡
1	①	插座	LCP	1	UL94-V0

GENERAL TOLERANCE		制图	03
DIM	TOL	审核	
X.X	±0.30	CHECK	
X.XX	±0.20	批准	
X.XXX	±0.10	APPROVAL	
Angle	±3.0°	比例	
		SCALE	
		投影	
		材料	
		MATERIAL	

**深圳市华灿天禄电子有限公司**  
ShenzhenhuacantianluELECTRONICS CO., LTD

产品名称 TITLE	1.25 单排 卧贴	版本 REV.	A
产品料号 PART NO.	HC-1.25-NPWT	单位 UNITS	mm
材料		页次 SHEET	1/1