
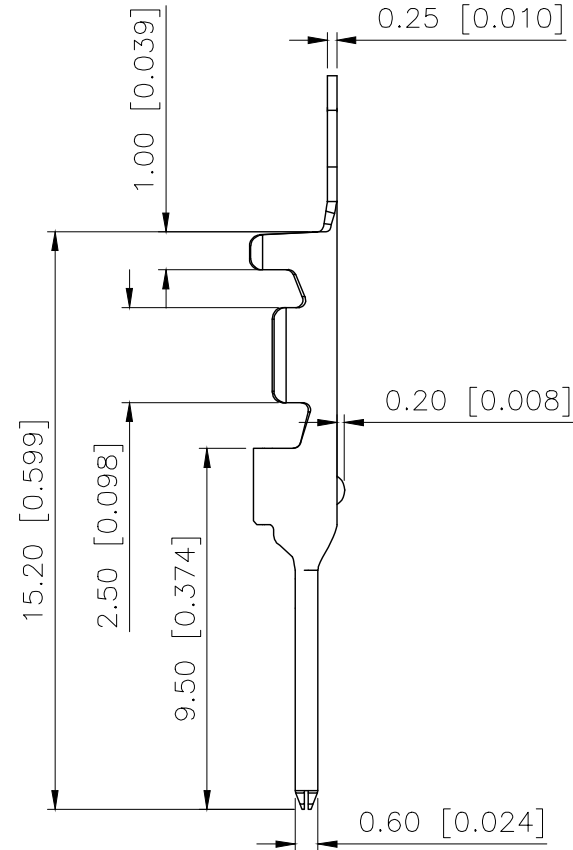


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2025.1.3	

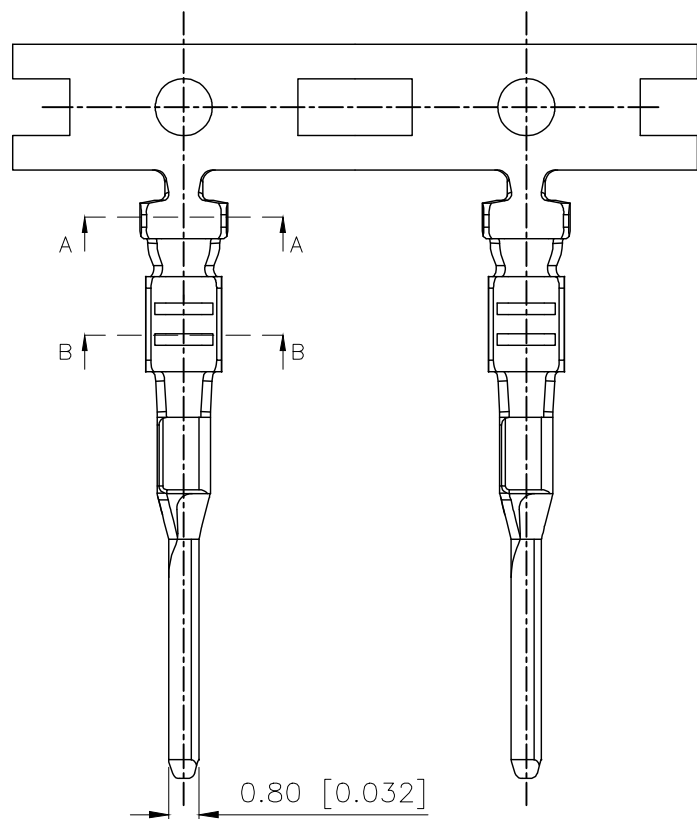




Specifications:

Voltage rating:100V AC/DC
100V AC/DC
Current rating:3A AC/DC
3A AC/DC
Withstanding voltage:1000V AC/minute
1000V AC/
Temperature range:-40 -+85
-40 -+85
Insulation resistance:1000MΩ min
1000MΩ Min
Contact resistance:20mΩ Max
20mΩ Max

PART NO.:

K 205001 I M-P SN

K:XKBTEK-Car Connector
XKB Series No
Category:T-Terminal
Categoiy:M-Male Terminal
Material:P-Phosphor Bronze
Plating:SN-Plated Tin

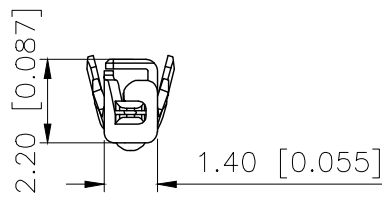

K205001TM-PSN	Phosphor Bronze	AWG#22-26	K205001HF
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN		VIEW:	MODEL TYPE: 2.0mm automotive connector
CHECKED		UNIT: mm/in	PART NO.: K205001TM-PSN
APPROVED		SIZE: A4	DWG NO.: