
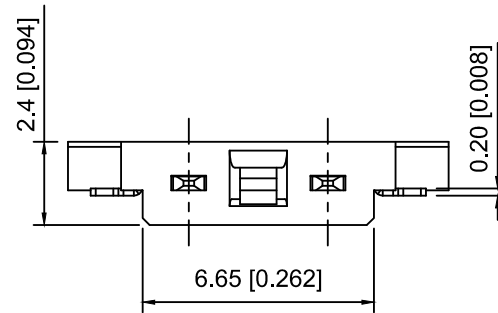


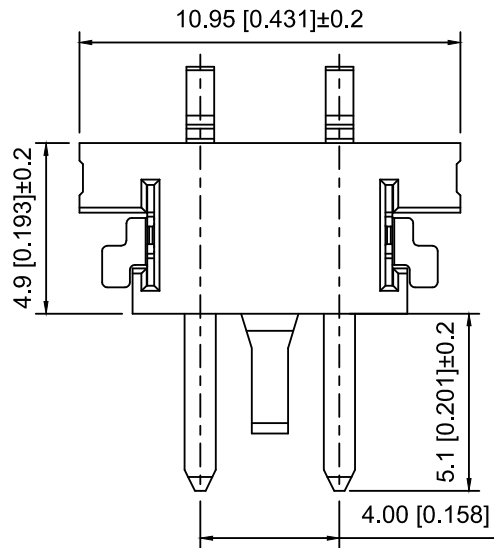

Specifications:

规格:

Voltage rating:400V AC/DC

额定电压: 400V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-40℃~+85℃

温度范围: -40℃~+85℃

Insulation resistance:≥1000MΩ min

绝缘电阻: ≥1000MΩ Min

Contact resistance:≤30mΩ

接触电阻: ≤30mΩ

X4002 W M - 02 - LP SW
① ② ③ ④ ⑤ ⑥

1.Series No


2.Category:W-Wafer

3.Category:M-Male



4.Row No.Pin No:XX-02 Pin

5.Material:LP-LCP UL 94V-0

6.Plating:SW-Matte Tin

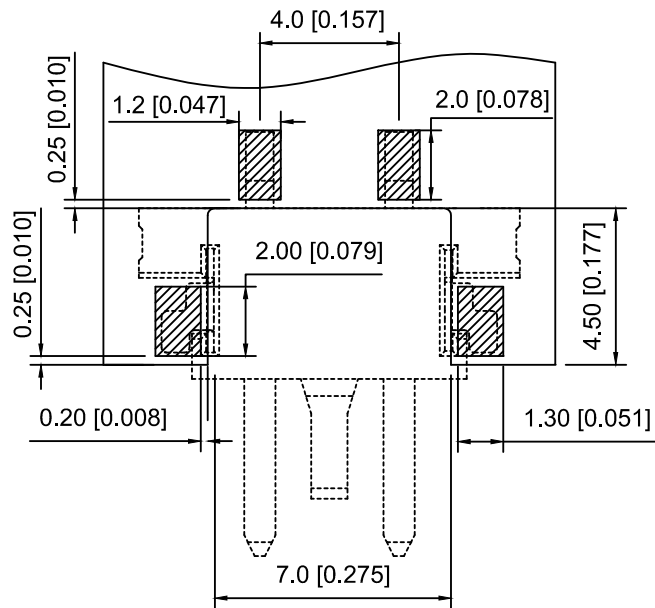

PCB LAYOUT

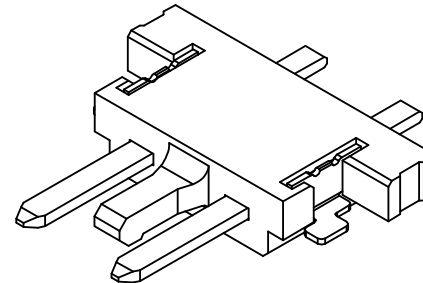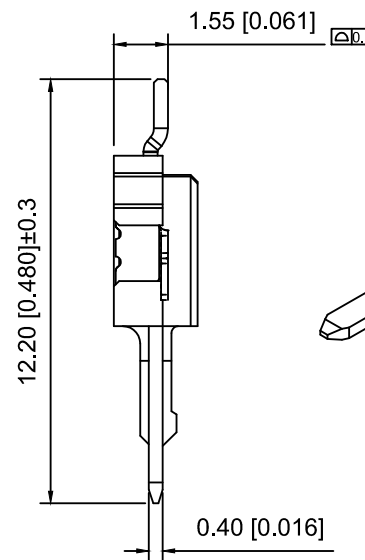

X4002WM-02-LPSW	LCP	Phosphor Bronze	X4002WF
PART NO	Material	Material(Pin)	Suitable XKB Female

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	4.0mm BTB Connector
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	X4002WM-02-LPSW
			DWG NO.:
			X-X4002WM-02-LPSW
		WEIGHT	SHEET
		1/1	REVISION
			A0

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED