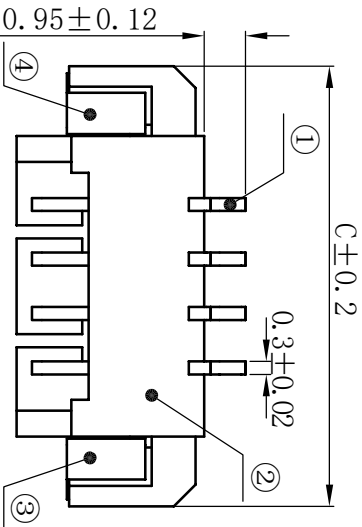


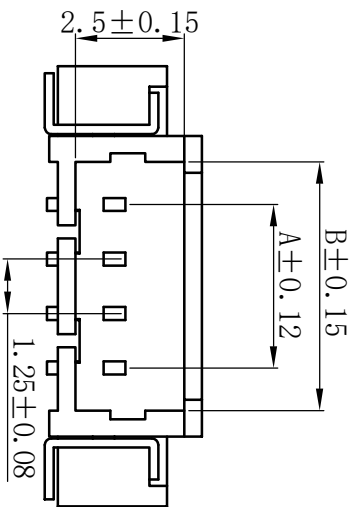


PCB LAYOUT

MX1.25mm贴片	A-(mm)	B-(mm)	C-(mm)
MX1.25mm-2P-WT	1.25	3.20	7.50
MX1.25mm-3P-WT	2.50	4.45	8.75
MX1.25mm-4P-WT	3.75	5.70	10.00
MX1.25mm-5P-WT	5.00	6.95	11.25
MX1.25mm-6P-WT	6.25	8.20	12.50
MX1.25mm-7P-WT	7.50	9.45	13.75
MX1.25mm-8P-WT	8.75	10.70	15.00
MX1.25mm-9P-WT	10.00	11.95	16.25
MX1.25mm-10P-WT	11.25	13.20	17.50
MX1.25mm-11P-WT	12.50	14.45	18.75
MX1.25mm-12P-WT	13.75	15.70	20.00
MX1.25mm-13P-WT	15.00	16.95	21.25
MX1.25mm-14P-WT	16.25	18.20	22.50
MX1.25mm-15P-WT	17.50	19.45	23.75
MX1.25mm-16P-WT	18.75	20.70	25.00

技术要求

1: 外观要求

- 1-1. 插针表面光洁、无损伤、锈蚀等缺陷。
- 1-2. 基座表面无脏污、飞边、排气不良等缺陷。

2: 电气性能:

- 2-1. 额定电流: 1.0A
- 2-2. 额定电压: 125V
- 2-3. 耐电压: 250V
- 2-4. 接触电阻: $\leq 20m\Omega$
- 2-5. 绝缘电阻: $\geq 100m\Omega$
3. 工作温度: $-25^{\circ}C \sim +85^{\circ}C$

>20	±0.25	序号	材料名称	数量	材质	镀涂	REMARK
>10≤20	±0.2	①	卧贴针	n	黄铜	高温亮锡	GP PASS
>3≤10	±0.15	②	塑件	1	LCP	／	GP PASS
3≤	±0.1	③	左焊片	1	黄铜	高温亮锡	GP PASS
尺寸范围	公差	④	右焊片	1	黄铜	高温亮锡	GP PASS
设计		产品名称					
审核		MX1.25mm-4P-卧贴					
批准							
单位: mm							

深圳市宝通成电子有限公司