

Actuator

46-
2234.4FH0.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-2234.4FH0.000>

Your product:



46-2234.4FH0.000 Actuator

FRONT

Front form:	round
Front bezel colour:	Silver
Front bezel material:	Aluminium
Front dimension:	Ø 35 mm

MOUNTING

Design:	flush
Mounting cut-out:	Ø 30.5 mm

OPERATING-/INDICATION PART

Lens optics:	transparent
Lens illumination:	illuminative
Lens material:	Plastic
Lens colour:	Green
Lens shape:	flush

ELECTRICAL CHARACTERISTICS

Protection class:	I
--------------------------	---

MECHANICAL CHARACTERISTIC

Switching action:	Maintained
Mechanical lifetime:	500 000 cycles of operation

Tightening torque: 2 ... 3 Nm (17.7 ... 26.6 Lb-in)

Weight: 0.035 kg

AMBIENT CONDITION

Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

IP front protection: IP65

Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)

Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)

Operating temperature: - 25 °C ... + 55 °C

IK front protection: IK04

CERTIFICATE

Conformities: CE

Approbations: CSA, UL

Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

OTHER


Housing material: Plastic

max. number of switching elements: 4

Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, flush, illuminative, Green, Plastic, transparent, round, Silver, Aluminium, Maintained, IP65, IK04

Housing colour: Black

Dimension drawings:

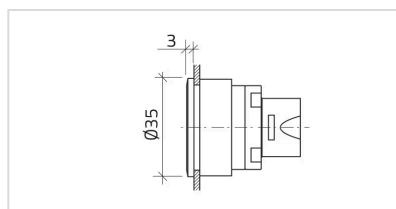

Mounting cut-outs:

