
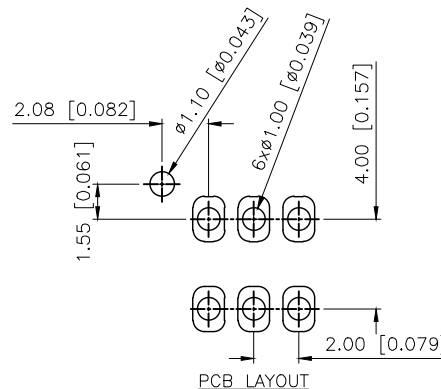
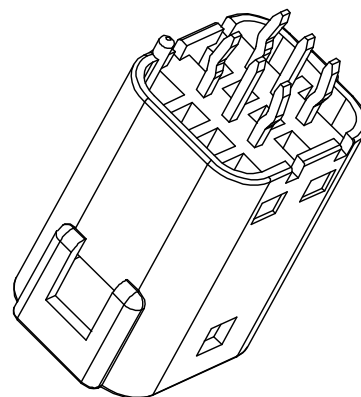
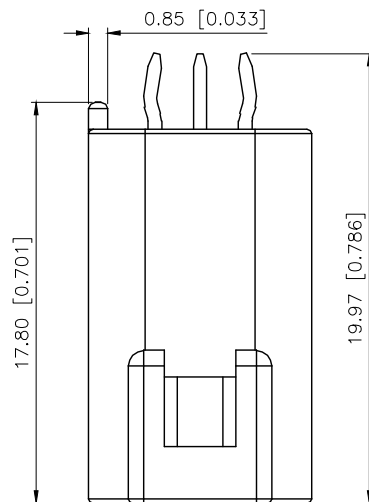
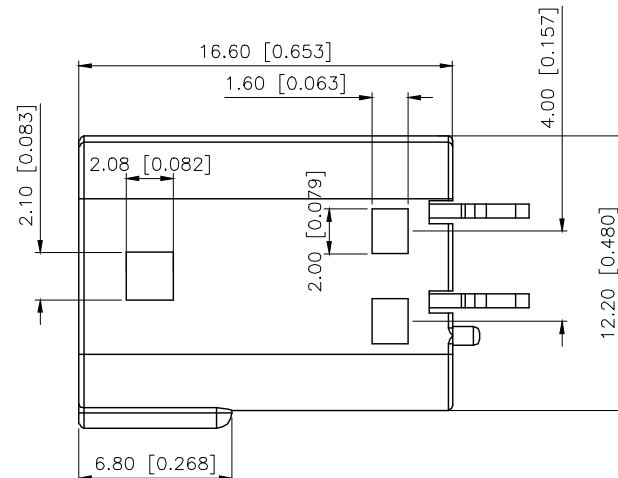


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.3	阿树

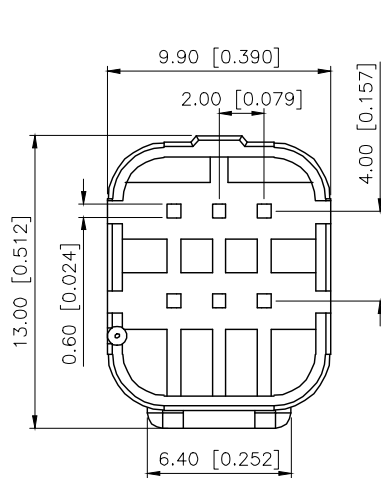

Specifications:

规格:

Voltage rating: 100V AC/DC

额定电压: 100V AC/DC

Current rating: 3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage: 1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range: -40°C ~ +85°C

温度范围: -40°C ~ +85°C

Insulation resistance: 1000M Ω min

绝缘电阻: 1000M Ω Min

Contact resistance: 20m Ω Max

接触电阻: 20m Ω Max

PART NO.:

K 205001 W V-06-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

① K: XKBTEK-Car Connector

② XKB Series No

③ Category: W-Wafer

④ Welding Board Angle: V-Straight 180°

⑤ Row No./Pin No: 06 Pin

⑥ Material: PT-PBT

⑦ Plating: SN-Tin Plating

K205001WV-XX-PTSN	PBT	Phosphor Bronze	K205001HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.0mm automotive connector
CHECKED		UNIT:	mm/in	PART NO.:	K205001WV-06-PTSN
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO., LIMITED

SCALE	PAGE	REVISION
N/A	1/2	A1