


RoHS  
Compliant








| ZONE | ECN.N.O. | DESCRIPTION | DRAWING | DATE       |
|------|----------|-------------|---------|------------|
| A    |          | INITIAL     | 林生财     | 2020.02.18 |





#### NOTES

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;


3D VIEW

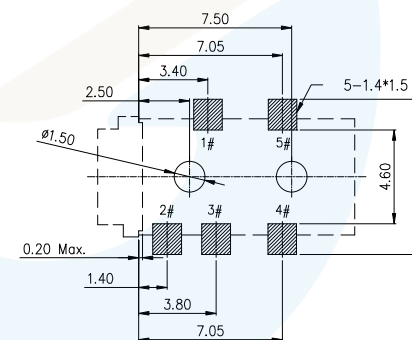


RECOMMENDED P.C.B LAYOUT  
TOP VIEW (TOLRANCE:±0.05)

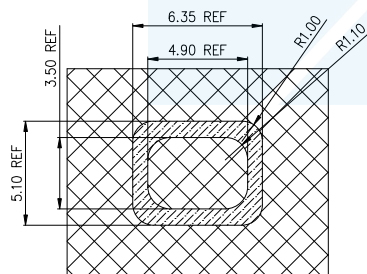

O-ring size  
(uncompressed)



面板开孔参考尺寸

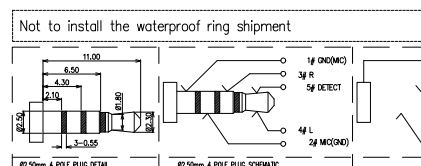

**LZG**

LZG INDUSTRIAL CO. LTD

|             |                  |       |            |          |     |
|-------------|------------------|-------|------------|----------|-----|
| DRAWING:    | 林生财              | DATE: | 2020.02.18 | SCALE    | 1:1 |
| CHECK:      | 李宏鑫              | DATE: | 2020.02.18 | MATERIAL | *   |
| APPROVAL:   | 杨进宝              | DATE: | 2020.02.18 | DWG. NO. |     |
| DRAWING NO. | ZB20003-05SBAP-A |       |            | SHEET    | 1/1 |

|           |                            |
|-----------|----------------------------|
| PART NAME | WATERPROOF Ø2.5 PHONE JACK |
| PART NO.  | ZB20003-05SBAP-A           |

|                                          |                                     |
|------------------------------------------|-------------------------------------|
| TOLERANCE UNLESS<br>OTHERWISE SPECIFIED: | 0.0±0.25<br>0.00±0.20<br>0.000±0.10 |
|------------------------------------------|-------------------------------------|

|                                |
|--------------------------------|
| 0.±2°<br>0.0°±1°<br>0.00°±0.5° |
|--------------------------------|

|             |
|-------------|
| UNIT:<br>mm |
|-------------|

