

P-Channel Enhancement Mode Power MOSFET

Description


The G90P04F uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. It can be used in a wide variety of applications.

General Features

- V_{DS} -40V
- I_D (at $V_{GS} = -10V$) -68A
- $R_{DS(ON)}$ (at $V_{GS} = -10V$) < 7.5m Ω
- $R_{DS(ON)}$ (at $V_{GS} = -4.5V$) < 10m Ω
- 100% Avalanche Tested
- RoHS Compliant

Application

- Power switch
- DC/DC converters



Schematic diagram



TO-220F

Device	Package	Marking	Packaging
G90P04F	TO-220F	G90P04	2500pcs/Reel

Absolute Maximum Ratings $T_C = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-40	V
Continuous Drain Current	I_D	-68	A
Pulsed Drain Current (note1)	I_{DM}	-272	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation	P_D	83	W
Single pulse avalanche energy (note2)	E_{AS}	306	mJ
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 To 150	$^\circ\text{C}$

Thermal Resistance



Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Ambient	R_{thJA}	50	$^\circ\text{C/W}$
Maximum Junction-to-Case	R_{thJC}	1.5	$^\circ\text{C/W}$

Specifications T _J = 25°C, unless otherwise noted						
Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
Static Parameters						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-40	--	--	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -40V, V _{GS} = 0V	--	--	-1	uA
Gate-Source Leakage	I _{GSS}	V _{GS} = ±20V	--	--	±100	nA
Gate-Source Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-1.2	-1.5	-2.5	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = -10V, I _D = -20A	--	6	7.5	mΩ
		V _{GS} = -4.5V, I _D = -15A	--	8	10	
Forward Transconductance	g _{FS}	V _{DS} = -5V,I _D = -20A	--	34	--	S
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = -20V, f = 1.0MHz	--	6371	--	pF
Output Capacitance	C _{oss}		--	676	--	
Reverse Transfer Capacitance	C _{rss}		--	605	--	
Total Gate Charge	Q _g	V _{DD} = -20V, I _D = -34A, V _{GS} = -10V	--	42	--	nC
Gate-Source Charge	Q _{gs}		--	7	--	
Gate-Drain Charge	Q _{gd}		--	10	--	
Turn-on Delay Time	t _{d(on)}	V _{DD} = -20V, I _D = -34A, R _G = 3Ω	--	10	--	ns
Turn-on Rise Time	t _r		--	18	--	
Turn-off Delay Time	t _{d(off)}		--	38	--	
Turn-off Fall Time	t _f		--	24	--	
Drain-Source Body Diode Characteristics						
Continuous Body Diode Current	I _S	T _C = 25°C	--	--	-68	A
Body Diode Voltage	V _{SD}	T _J = 25°C, I _{SD} = -20A, V _{GS} = 0V	--	--	-1.2	V
Reverse Recovery Time	T _{rr}	I _F = -12A, V _{GS} = 0V di/dt=-100A/us	--	40	--	nC
Reverse Recovery Charge	Q _{rr}		--	42	--	ns



Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. Identical low side and high side switch with identical R_G
3. EAS condition : $T_J = 25^{\circ}\text{C}, V_{DD} = -40V, V_{GS} = -10V, L = 0.5mH, R_G = 25\Omega$



Gate Charge Test Circuit

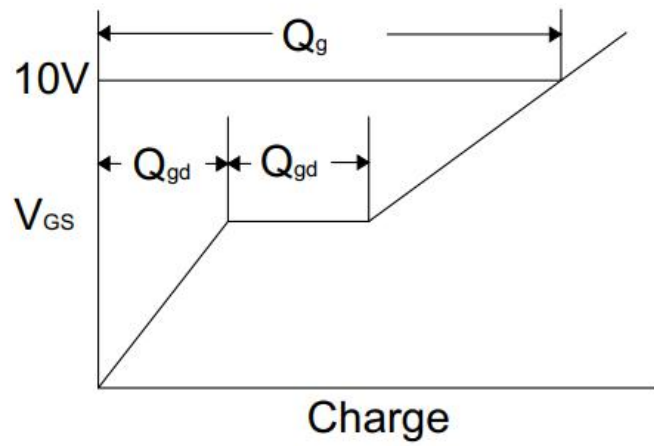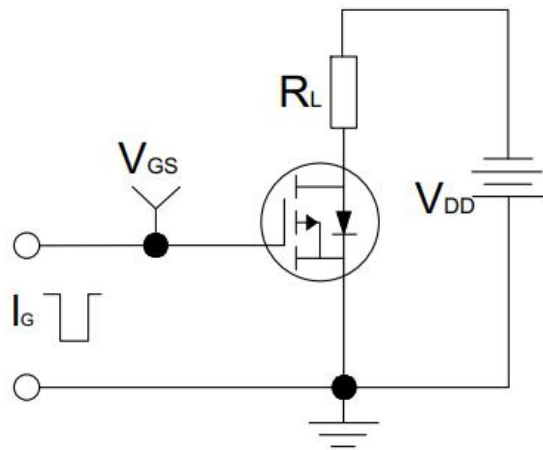

Switch Time Test Circuit

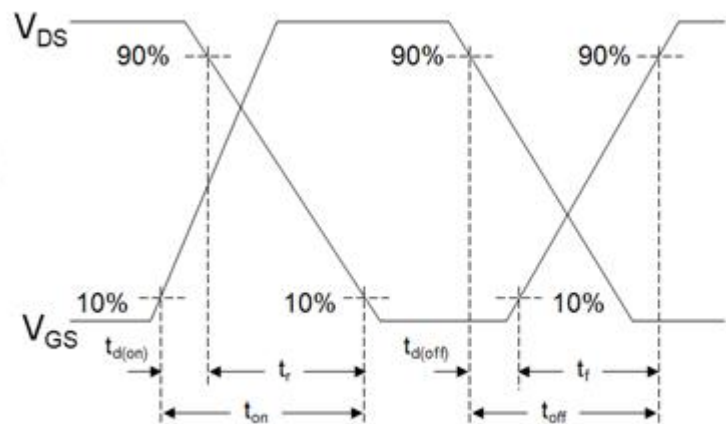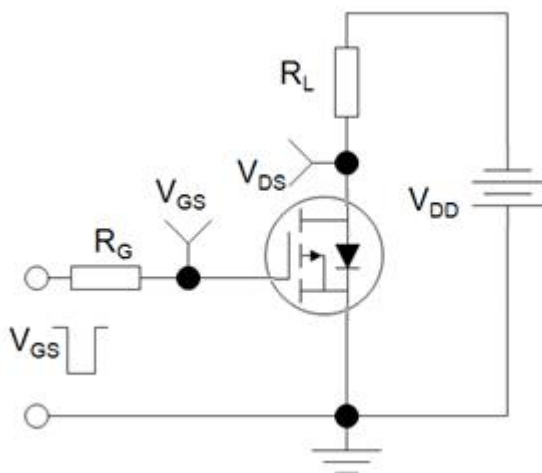

EAS Test Circuit

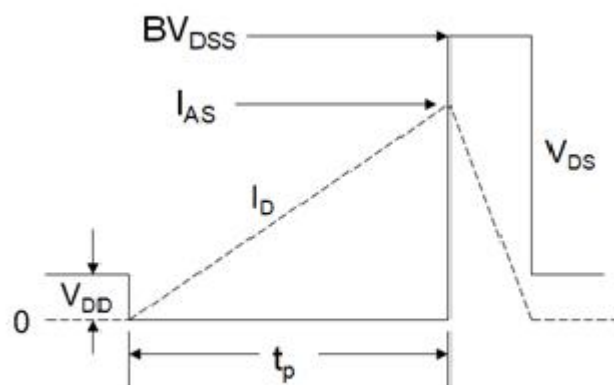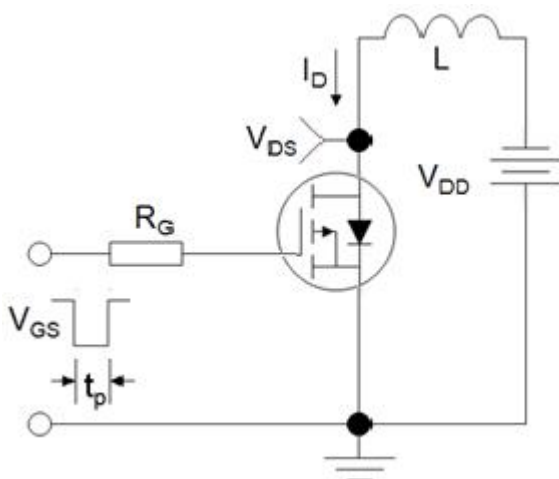

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 1. Output Characteristics

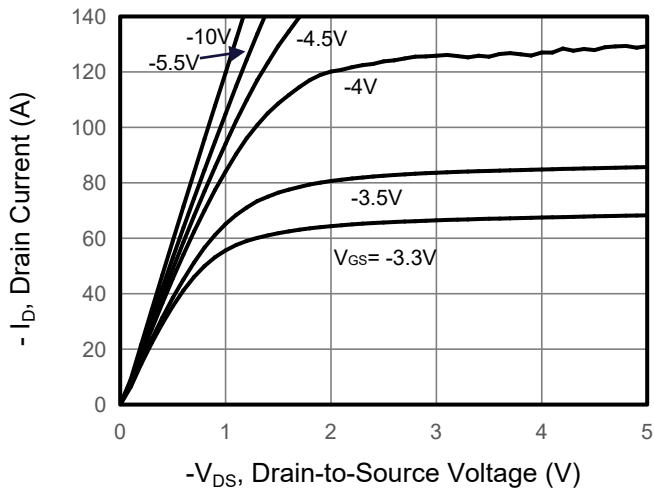


Figure 2. Transfer Characteristics

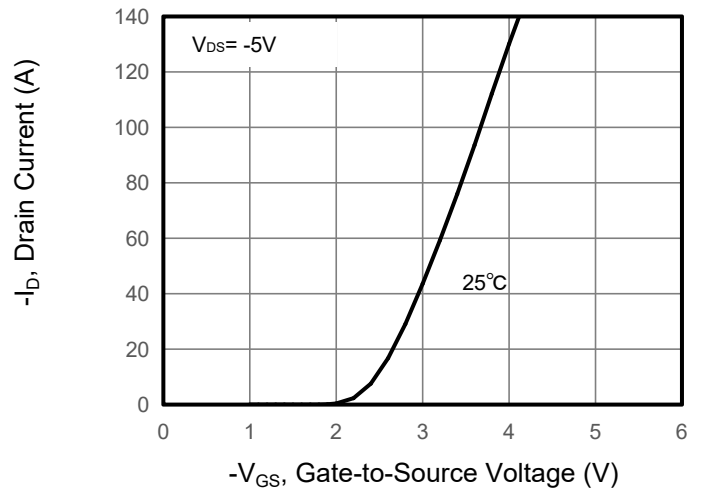


Figure 3. Drain Source On Resistance

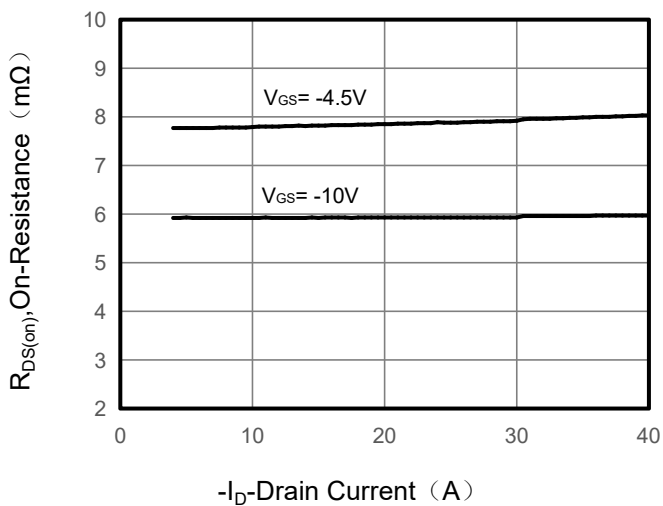


Figure 4. Gate Charge

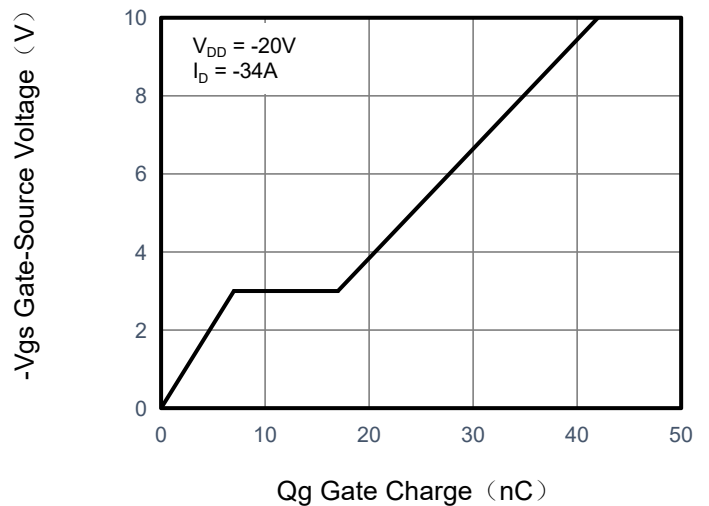


Figure 5. Capacitance


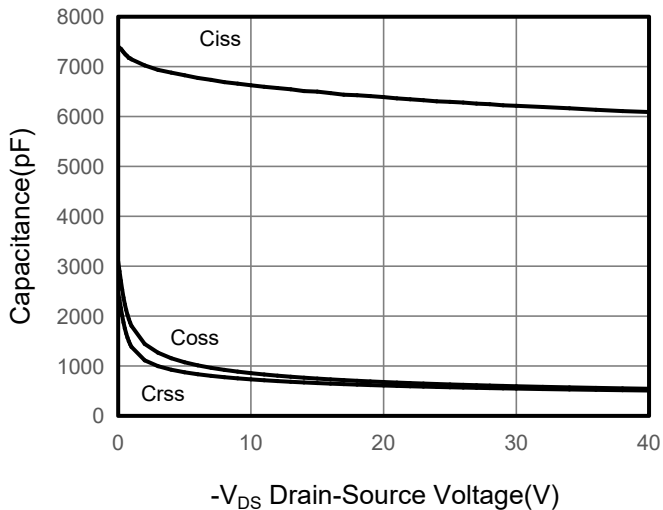


Figure 6. Source-Drain Diode Forward

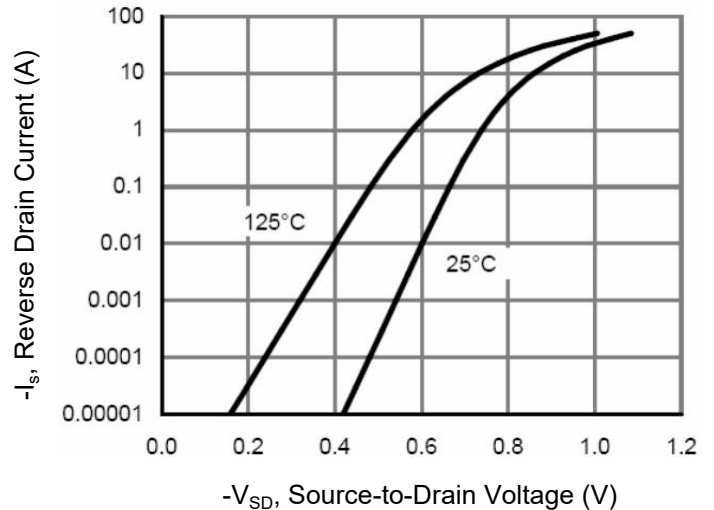

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 7. Drain-Source On-Resistance

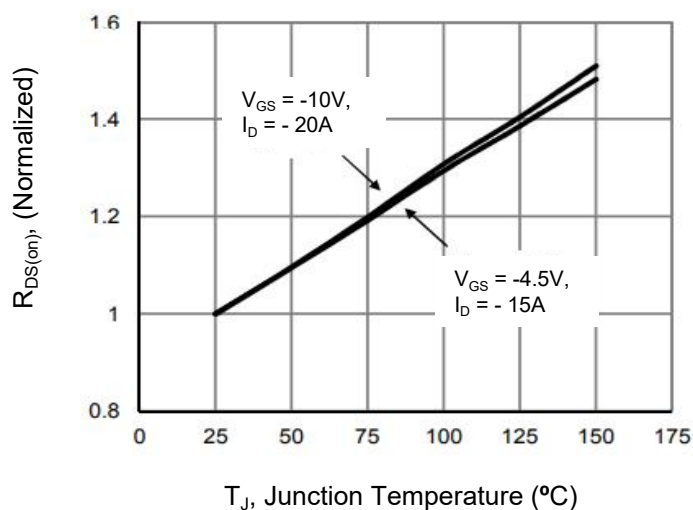


Figure 8. Safe Operation Area



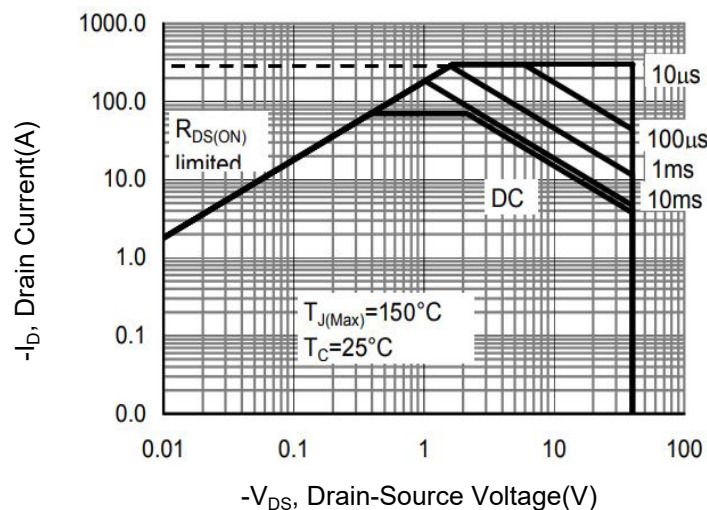


Figure 9. Normalized Maximum Transient Thermal Impedance

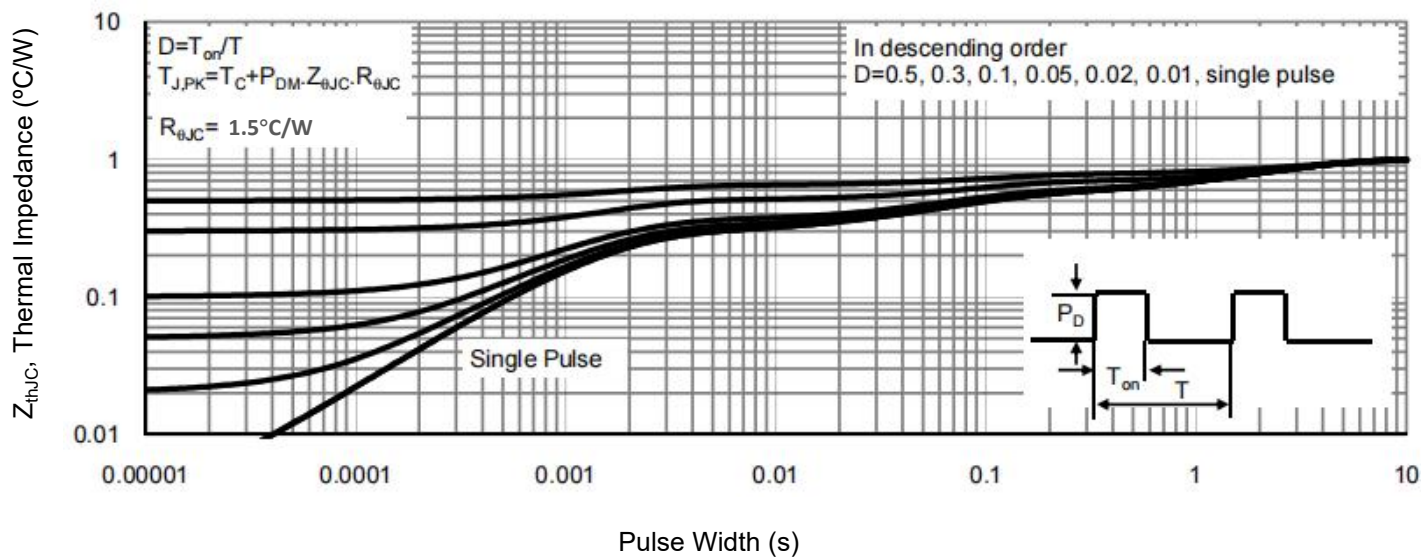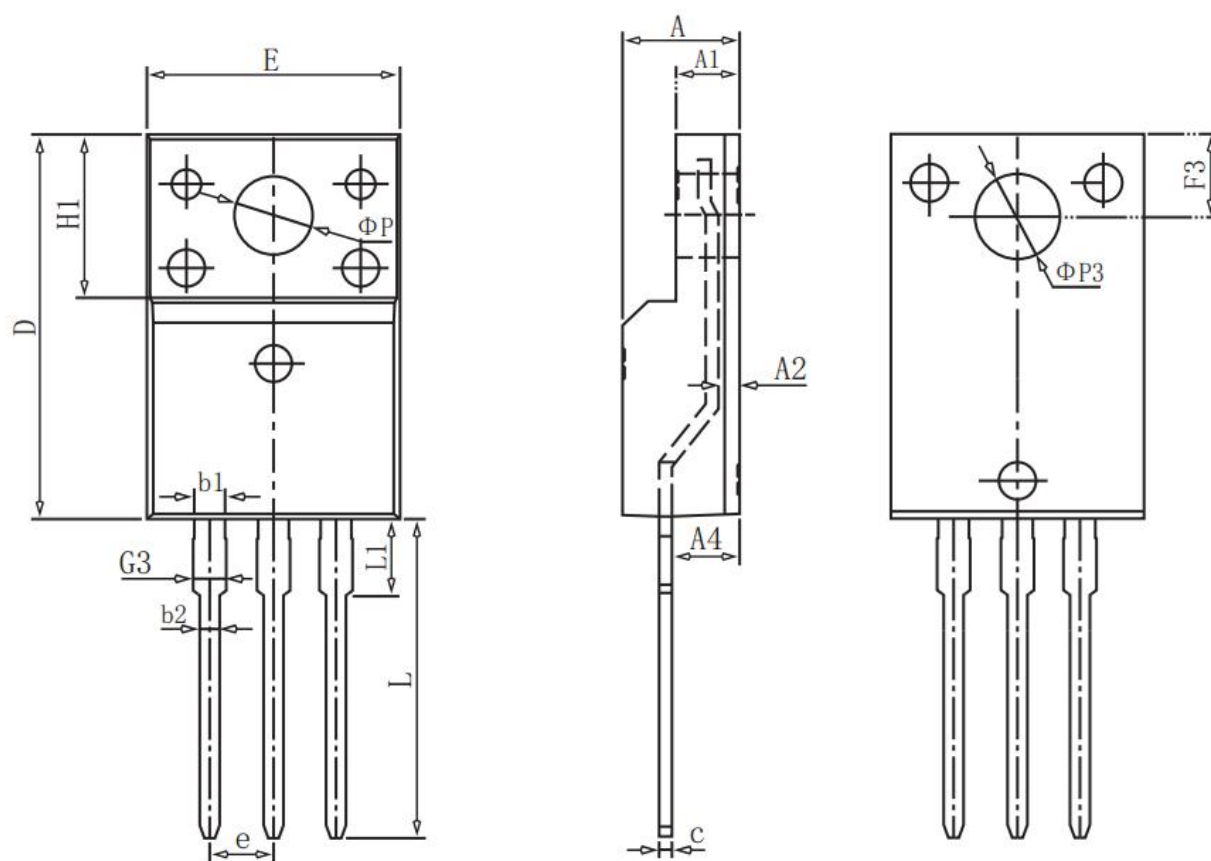

TO-220F Package Information

COMMON DIMENSIONS

SYMBOL	mm		
	MIN	NOM	MAX
E	10.00	10.20	10.40
A	4.50	4.70	4.90
A1	2.34	2.54	2.74
A2	0.65	0.85	1.30
A4	2.55	2.75	2.95
c	0.40	0.50	0.65
D	15.57	15.87	16.17
H1	6.70REF		
e	2.54BSC		
ΦP	3.183REF		
L	12.68	12.98	13.28
L1	3.25	3.45	3.65
ΦP3	3.45REF		
F3	3.10	3.30	3.50
G3	1.10	1.30	1.50
b1	1.05	1.20	1.35
b2	0.70	0.80	0.92