

▶ Heatsinks f.cool

▶ Cases f.case

▼ **Connectors f.con**

▶ Sockets

▼ PCB connectors

- Male headers
- Female headers
- Direct female connector
- **Jumpers**

▶ IDC-connectors

▶ D-Sub connectors

■ Brackets for PC


▶ Optoelectronics

## Jumpers

### CAB 5 05 G ...

for 0.6-0.64 mm wire wrap pins and Ø 0.6-0.7 mm The flexible contacts are shorting two pins. The jumpers can be mounted behind and next to each other.



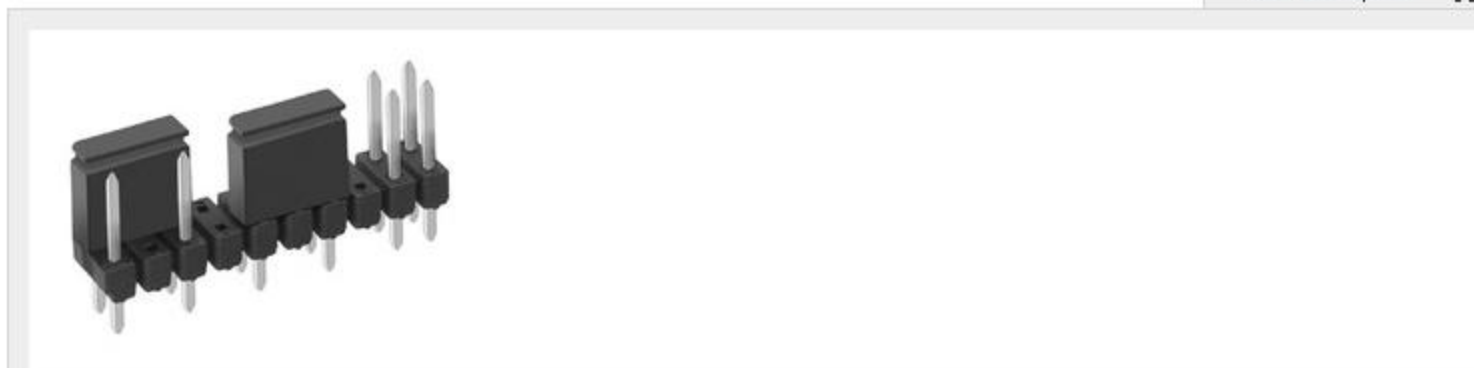

Features **Technical Drawing** Variants

<b>no. of contacts</b>	2
<b>Oberfläche Kontakt / Kontakthülse</b>	0,5µm Au 1µm Au 5µm Sn
<b>surface of contact</b>	0.5 µm gold
<b>Einstecktiefe</b>	4...5,5mm
<b>Nennstrom</b>	3 A
<b>nominal voltage</b>	250 V AC
<b>Material Isolierkörper</b>	PA 6
<b>temperature range</b>	-40 °C ... +105 °C
<b>grid</b>	5.08 mm
<b>version</b>	closed, hole for probe trip
<b>colour</b>	blue grey