
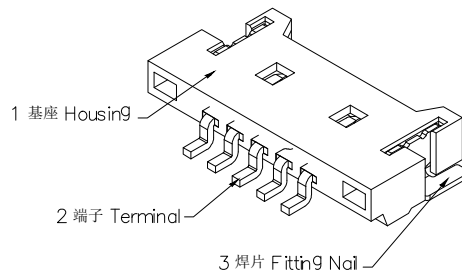
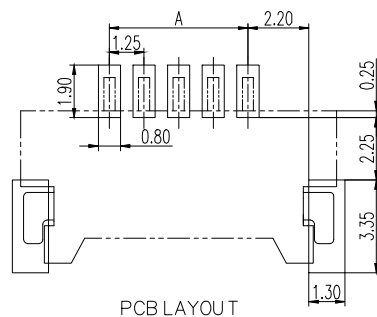




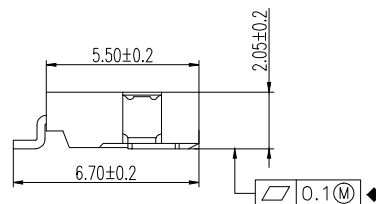


RoHS



技术要求 Notes:

- 外观质量 Appearance quality:
 - 金属表面镀层不能有明显损伤;
Coating on metal surface can not be damaged obviously;
 - 塑壳表面不能有明显的变形或开裂;
No obvious deformation or cracking can be observed on the surface of the Housing;
 - 产品表面应保持清洁;
Product surface should be kept clean;
- 工作温度 Working temperature: -25℃~+85℃;
- 额定电压 Voltage Rating: Max 125V [AC(Effective value rms)/DC];
- 额定电流 Current Rating: Max 1A [AC(Effective value rms)/DC];
- 接触电阻 Contact resistance: Max 20 mΩ
- 绝缘电阻 Insulation resistance: Min 100M Ω;
- 耐压 Withstanding voltage: 500V AC(50 Hz, Effective value; 1 min);
- 环保要求应符合RoHS标准
Environmental requirements should meet RoHS standards.

FG-1.25WT16A-G	18.75	25.15	17.50
FG-1.25WT15A-G	17.50	23.90	16.25
FG-1.25WT14A-G	16.25	22.65	15.00
FG-1.25WT13A-G	15.00	21.40	13.75
FG-1.25WT12A-G	13.75	20.15	12.50
FG-1.25WT11A-G	12.50	18.90	11.25
FG-1.25WT10A-G	11.25	17.65	10.00
FG-1.25WT9A-G	10.00	16.40	8.75
FG-1.25WT8A-G	8.75	15.15	7.50
FG-1.25WT7A-G	7.50	13.90	6.25
FG-1.25WT6A-G	6.25	12.65	5.00
FG-1.25WT5A-G	5.00	11.40	3.75
FG-1.25WT4A-G	3.75	10.15	2.5
FG-1.25WT3A-G	2.50	8.90	—
FG-1.25WT2A-G	1.25	7.65	—
PART TYPE	DIM A	DIM B	DIM C

3	FITTING NAIL	2	PHOSPHOR BRONZE	Sn-PLATED Au-PLATED	
2	TERMINAL	N	PHOSPHOR BRONZE	Sn-PLATED Au-PLATED	
1	HOUSING	1	LCP UL94-V0	NATURAL	
NO	NAME	NUMBER	MATERIAL	ELECTRIC PLATING	REMARKS

TOLERANCE UNLESS OTHERWISE SPEC		SHENZHEN FUGANG TECHNOLOGY CO.,LTD					
BASIC DIMENSION	TOLERANCE	DSND	J	Y	2026.07.22	TITLE:PIN HEADER	
x.x	±0.50	CHKD	Y	H	C	2026.07.22	
x.xx	±0.30	APVD		L	P	J	2026.07.22
x.xxx	±0.10						
ANGLES	±3°	UNIT:mm		SCALE:1:1		SIZE:A4	SHEET:1/1