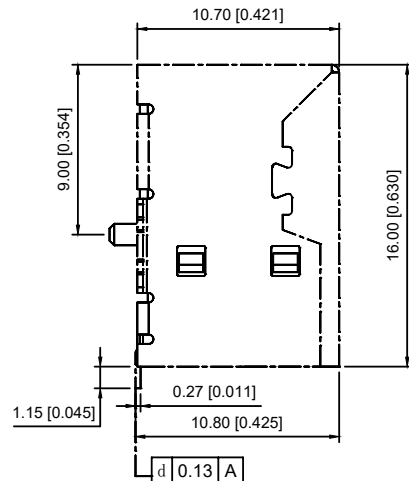
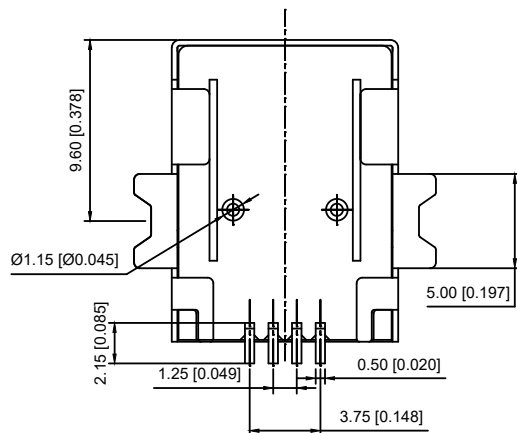


Specifications:

Current Rating:1.0A AC,DC

Voltage Rating:30V AC,DC

Contact Resistance:30m Ohm Max

Insulation Resistance:1,000M Ohm Min

Withstanding Voltage:500V AC/Minute

Operating Temperature Range:-40°C to +105°C

Materials:

Insulator:Nylon 9T UL94V-0, COLRO: Nature



Contact:Phosphor Bronze

Plating: Au Plated on Contact Area,

Tin Plated on Solder Tail.

Ni Plated on Under overall.

Shell:Brass, Nickel Plated

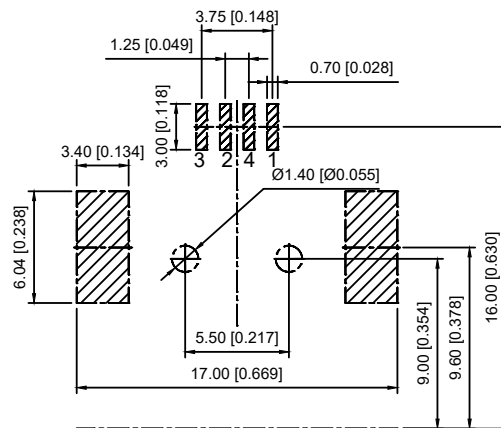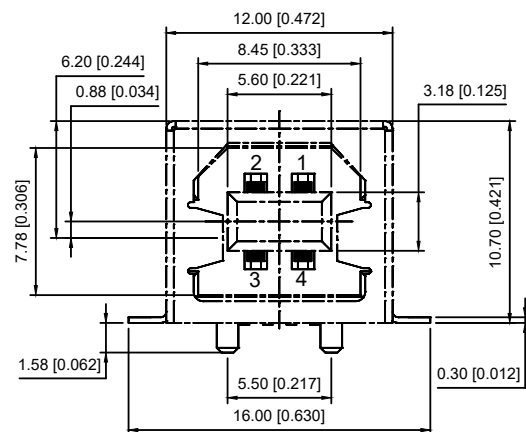RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)

U241-041N-2CS1-002

1: Au 1U" MIN
2: Au 15U" MIN
3: Au 30U" MIN1: WITH
2: WITHOUTB: BLACK
U: BLUE
W: WHITE
C: CREAM-COLOR1: PBT
2: LCP
3: PA

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND		SCALE: N/A	MODEL TYPE: USB 2.0
DWN		VIEW:	PART NO.: U241-041N-2CS1-002
CHKD		UNIT: mm/in	DWG NO.: U241-041N-2CS1-002
APPD		SIZE: A4	WEIGHT SHEET REVISION
			1/1 A0