

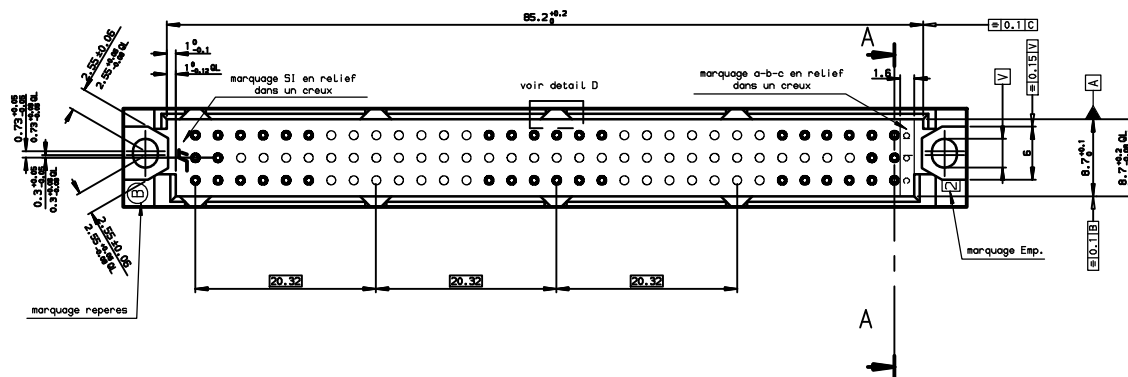
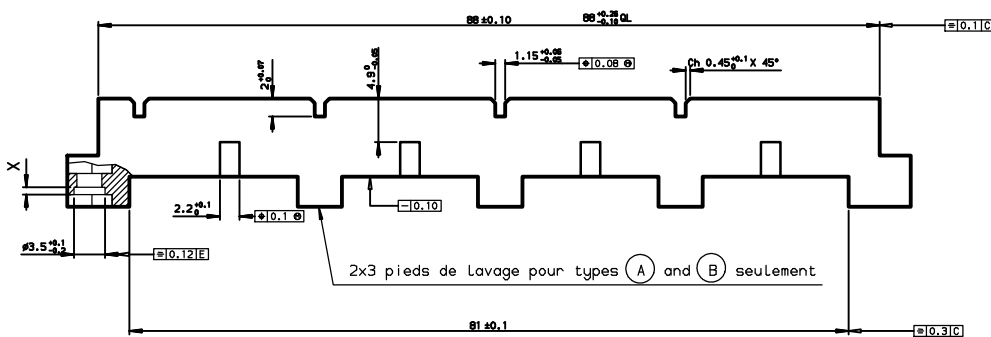


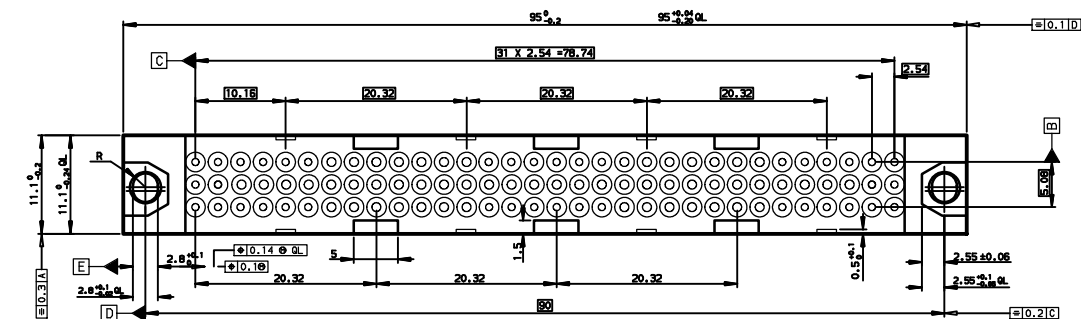

DETAIL D - Ech. 10




EXIGENCES ETUDE
GARANTIE DES COTES EN SERIE
 1. Garantie du mini et du maxi de la cote.
 2. Garantie du maxi de la cote.
 3. Garantie du mini de la cote.
 ○ : COTE MAJEURE
 △ : COTE CRITIQUE
 Q.L. Cotes qualifiées, acceptées en dérogation.

NOTA :

- 2 Empreintes panachables avec pontets inverses et inverses avec barette : voir plan AI-T-5988 et AI-T-9365
- vrillage pieces de 0.13 Maxi

COUPE AA - Ech. 8

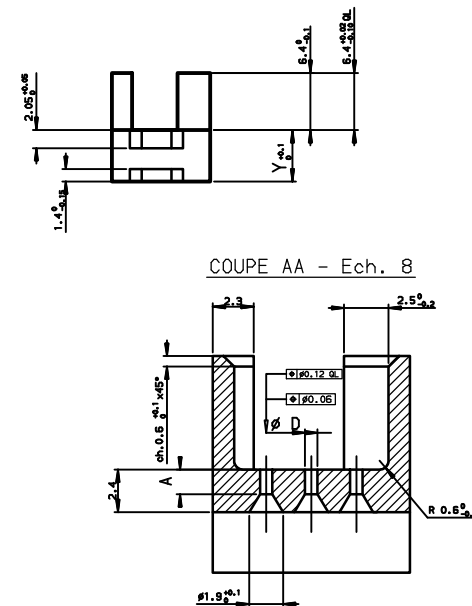

NOTE: RoHS INFORMATION

- The "LF" product meets European union Directives and other country regulations as described in 65-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see 65-14-920.

rev	ecn no	dr	date
A	LS05-0086	HLE	2005/10/
B	LS06-0095	LGO	2006/06/
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface 150 1302 ✓ tolerance std 150 406 150 1101		projection  mm	
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr ROUTILLARD 2005/10/12		ANGULAR		size	
Eng TARAON 2005/10/12		LINEAR		A2	
Chr LEGARE 2005/10/12		LW ±2°		Scale 2.5	
Appr LEGARE 2005/10/12		Product family		ECN L506-0095	
		DIN 8609		Spec ref -	
		PONTET 8609 AUTOBLOQUANT Polarisation standard catalogue no -		2 3 4 C-8609-1184 CUSTOMER sheet 1 of 1	
Title		Rev.		B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86092256LF](#) [86092259LF](#) [86092260LF](#)