


# GSM | GPRS

## GE864-QUAD AUTOMOTIVE Embedded



- Ultra Compact
- Telit Unified AT Command Set
- BGA Package
- Designed for Automotive Applications
- Useable Lifetime >10 years
- Extended Supply Voltage Range 3.25 - 4.2 V
- Extended Temperature Range -40° to +85° C
- Quad Band GPRS
- GPRS Class 10
- RoHS Compliant
- SIM Access Profile
- PYTHON\* Script Interpreter
- Embedded FTP and SMTP Client
- Extended RF Sensitivity
- Serial Port Multiplexer (GSM 7.10)
- Embedded TCP/IP Stack

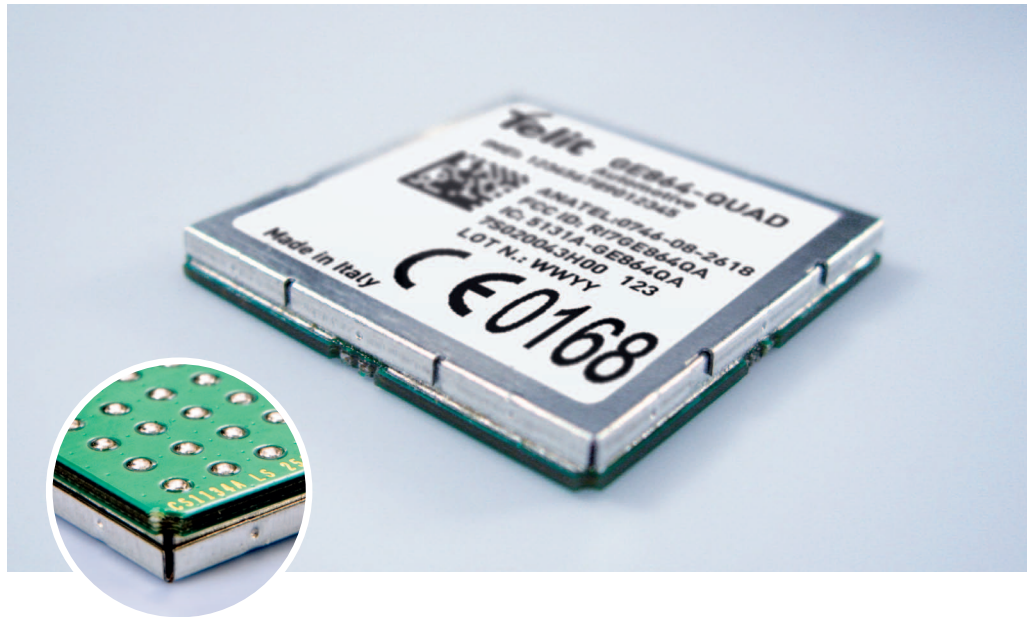

The GE864-QUAD Automotive is the extra-rugged member of the GE864 product family incorporating quad-band, RoHS compliance, as well as very low power consumption.

The use of the GE864 sub-compact form factor allows the integration of automotive and other applications requiring assured extended operating temperature range and mechanical ruggedness within the ever-shrinking space inside electronics bays in trucks, automobiles, and other mobile platforms.

The Ball-Grid-Array (BGA) package provides for a very low profile in the integrated solution while at the same time enhancing the performance of mechanical resistance to shock and vibration typical in these applications. Since cost is a key element for automotive applications, the elimination of connectors afforded by the BGA concept also brings down the solution cost compared to conventional mounting methods.

With its low profile design, extended temperature range, ESD and EMC compliance, the GE864-QUAD Automotive is the ideal and complete hardware platform for all automotive m2m markets, both OEM and aftermarket.

All Telit modules, support Over-the-Air firmware update by means Premium FOTA Management. By embedding RedBend's vCurrent® agent, a proven and battle-tested technology powering hundreds of millions of cellular handsets world-wide Telit is able to update its products by transmitting only a delta file, which represents the difference between one firmware version and another.

As a part of Telit's corporate policy of environmental protection, all products comply to the RoHS (Restriction of Hazardous Substances) directive of the European Union (EU Directive 2002/95/EG).


### Product features

- Quad-band EGSM 850 / 900 / 1800 / 1900 MHz
- Output power
  - Class 4 (2W) @ 850 / 900 MHz
  - Class 1 (1W) @ 1800 / 1900 MHz
- Control via AT commands according to GSM 07.05, 07.07 and Telit enhancements
- Serial port multiplexer GSM 7.10
- SIM access profile
- Supply voltage range: 3.25-4.2 V DC (3.8 V DC recommended)
- TCP/IP stack access via AT commands
- Unified Telit AT command interface
- Power consumption (typical values)
  - Power off: < 26 uA
  - Idle (registered, power saving): < 2.6 mA
  - Dedicated mode: 200 mA
  - GPRS cl.10: 370 mA
- Sensitivity:
  - 107 dBm @ 850 / 900 MHz
  - 106 dBm @ 1800 / 1900 MHz
- Dimensions: 30 x 30 x 2.8 mm
- Weight: 6 grams
- Extended temperature range
  - 40°C to +85°C (operational)
  - 40°C to +90°C (storage temperature)
- RoHS compliant

**Making machines talk.®**

# GE864-QUAD AUTOMOTIVE

Embedded



actual size



Telit Communications S.p.A.  
Via Stazione di Prosecco, 5/B  
I-34010 Sgonico (Trieste), Italy  
Phone +39 040 4192 200  
Fax +39 040 4192 383  
E-Mail EMEA@telit.com

Telit Wireless Solutions Inc.  
3131 RDU Center Drive, Suite 135  
Morrisville, NC 27560, USA  
Phone +1 888 846 9773 or +1 919 439 7977  
Fax +1 888 846 9774 or +1 919 840 0337  
E-Mail NORTHAMERICA@telit.com

Telit Wireless Solutions Inc.  
Rua Paes Leme, 524, Conj. 126  
05424-101, Pinheiros, São Paulo-SP-Brazil  
Phone +55 11 3031 5051  
Fax +55 11 3031 5051  
E-Mail LATINAMERICA@telit.com

Telit Wireless Solutions Co., Ltd.  
8th Fl., Shinyoung Securities Bld.  
6, Gukjegeumyung-ro8-gil, Yeongdeungpo-gu  
Seoul, 150-884, Korea  
Phone +82 2 368 4600  
Fax +82 2 368 4606  
E-Mail APAC@telit.com

[www.telit.com](http://www.telit.com)  
[www.m2mAIR.com](http://www.m2mAIR.com)

[www.telit.com/techforum](http://www.telit.com/techforum)  
[www.telit.com/facebook](http://www.telit.com/facebook)  
[www.telit.com/twitter](http://www.telit.com/twitter)

## Interfaces

- 9 I/O ports maximum
- Analog audio (balanced and unbalanced)
- 2 A/D and 1 D/A converter
- Digital audio interface
- Buzzer output
- ITU-T V.24 serial link through CMOS UART:
  - Baud rate from 300 to 115,200 bps
  - Autobauding from 1,200 to 115,200 bps

## Audio

- Telephony, emergency call
- Half rate, full rate, enhanced full rate and adaptive multi rate voice codecs (HR, FR, EFR, AMR)
- Superior echo cancellation & noise reduction
- Handset & hands-free operations
- DTMF

## Approvals

- Fully type approved conforming with R&TTE directive
- CE, GCF, FCC, PTCRB, IC, Anatel

## Environmental tests

- ISO 16750-1:2003, Road vehicles — Environmental conditions and testing for electrical and electronic equipment :
  - [1] ISO 16750-1:2003, Part 1: General
  - [2] ISO 16750-3:2003, Part 3: Mechanical loads
  - [3] ISO 16750-4:2003, Part 4: Climatic loads
- CISPR 25, 2nd Edition: Radiated Emission ALSE method

## SMS

- Point-to-point mobile originated and mobile terminated SMS
- Concatenated SMS supported
- SMS cell broadcast
- Text and PDU mode

## Circuit switched data transmission

- Asynchronous transparent circuit switched data (CSD) up to 14.4 kbps
- Asynchronous non-transparent CSD up to 9.6 kbps
- V.110

## GPRS data

- GPRS class 10
- Mobile station class B
- Coding scheme 1 to 4
- PBCCH support

## Fax

- Group 3, class 1

## GSM supplementary

- Call forwarding
- Call barring
- Call waiting & call hold
- Advice of charge
- Calling line identification presentation (CLIP)
- Calling line identification restriction (CLIR)
- Unstructured supplementary services mobile originated data (USSD)
- Closed user group

## Additional features

- SIM phonebook
- Fixed dialing number (FDN)
- Real-time clock (Requires external Xtal)
- Alarm management
- Real-time AT message/warnings upon reaching temperature limits
- Network LED support
- IRA character SET, UCS2 and GSMDefault
- Jamming detection & report
- Embedded TCP/IP stack, including TCP, IP, UDP, SMTP and FTP protocols
- PFM (Premium FOTA Management) Over the Air Update
- MUX driver
- RIL driver

## PIN Protection

- ESD protection level 4
  - Contact up to +-4kV
  - Air up to +-8kV
  - Contact antenna pin up to +-15kV

## Telit's EASY features

- EASY SCAN® automatic scan over GSM frequencies (also without SIM card)

## Order-No.

Please contact your Telit representative for order codes and all further information

