
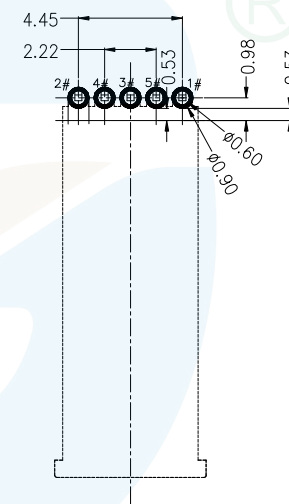

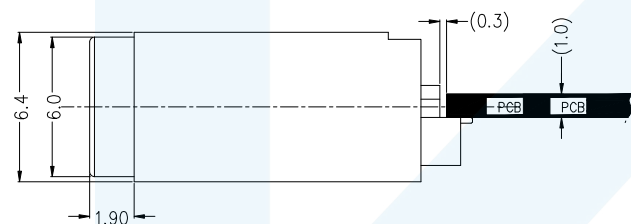








ZONE	ECN.N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生財	2020.02.18

- 1.Current Rating: 12V&1A max.
- 2.Contact Resistance: 50mOhms Max.(initial)
- 3.Insulation Resistance: 100M Ohms Min./500V DC
- 4.Dielectric Withstanding Voltage: 500V AC/1Minute
- 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
- 6.Durability: 5,000 Cycles
- 7.Operating Temperature: -25°C to +85°C

PLEASE CONTACT LZG FOR TECHNICAL SUPPORT.;

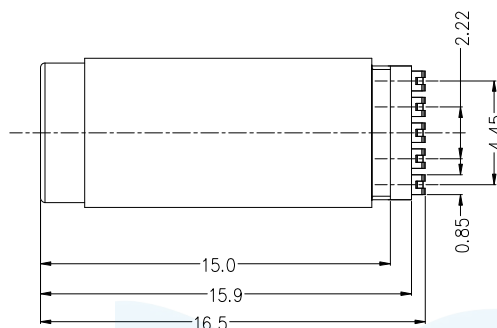

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05

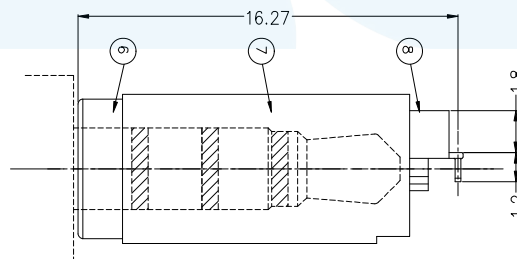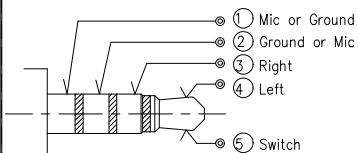

8	Cover	Thermoplastics	Black
7	Housing		
6	Sleeve	Copper Alloy	Ni Plated Overall.
5	Switch Contact		Sn On Solder&Contact Area;Ni Plated Overall.
4	Left Contact		
3	Right Contact		G/F On Contact Area
2	Ground Contact		Sn On Solder Tails
1	Mic Contact		Ni Plated Overall.
Item	Name	Material	Description

DRAWING:	林生財	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	楊進堂	DATE:	2020.02.18	DWG.NO.	
DRAWING NO.	ZB23021-05SBAP-A			SHEET	1/1



LZG INDUSTRIAL CO. LTD

PART NAME	Audio Jack 5Pin W/O Shell (SMD)	TOLERANCE UNLESS	0.0±0.3	0.±2°
PART NO.	ZB23021-05SBAP-A	OTHERWISE SPECIFIED:	0.00±0.2 0.000±0.1	0.0°±1° 0.00°±0.5°

