
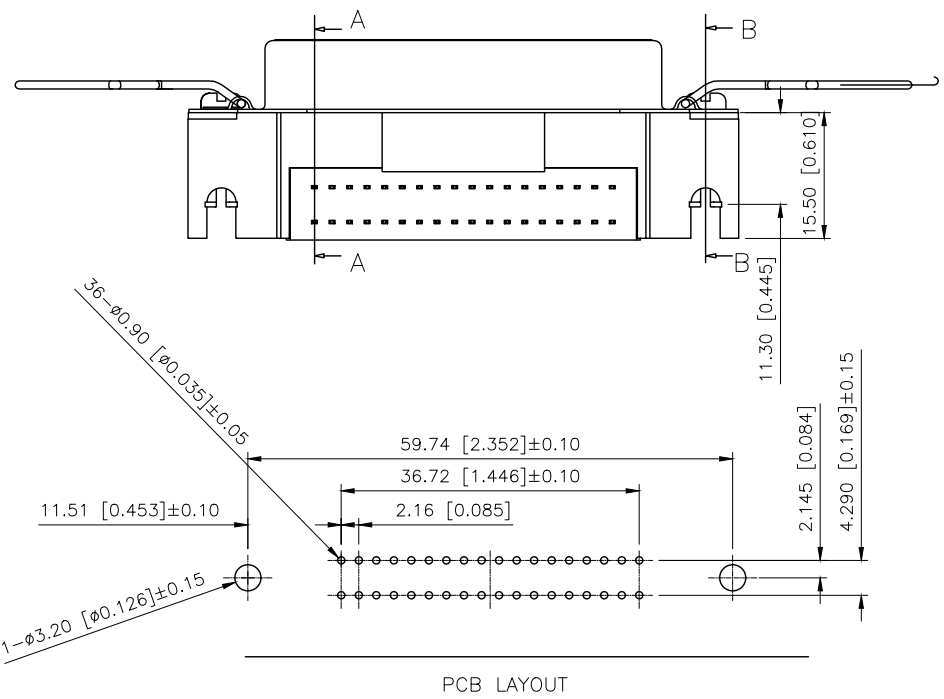
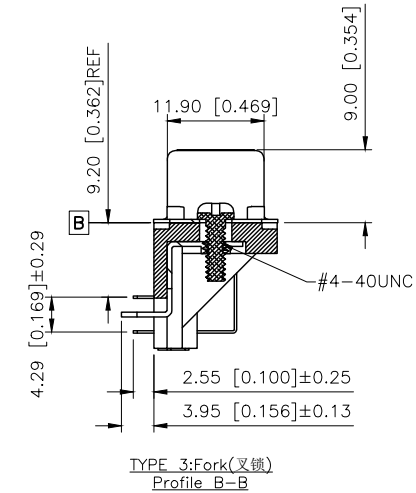
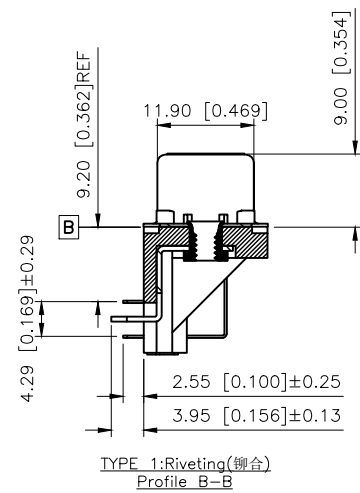



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.09.26	阿树

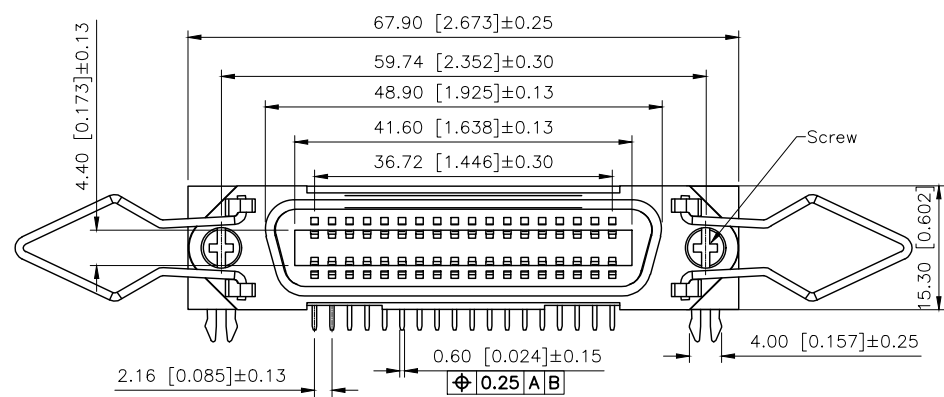

- Specifications (规格):
1. Voltage rating (额定电压): DC 250V
 2. Current rating (额定电流): 1.5A AC/DC
 3. Withstanding voltage (耐压值): ≥1000V AC/minute
 4. Insulation resistance (绝缘电阻): ≥1000MΩ Min
 5. Contact resistance (接触电阻): ≤30mΩ Max
 6. Temperature range (使用温度): -25℃~+80℃
 7. Shell (外壳): SPCC, T=0.4mm
 8. Contact material (触点材料): Brass
 9. hook (卡勾): SUS 304
 10. Insulator (绝缘体): PBT UL 94V-0, Black

PART NO.:

XSC 36 F I Z B 3 G
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series NO.
② Row No. Pin No. XX-36
③ Welding Board Angle : F—Female
④ T: Tradutional
⑤ Planting Category: 7: Terminal half—Gold Bright
⑥ Color: B: Black W: White BL: Blue
⑦ 1: TYPE-1; 3: TYPE-3;
⑧ Special type: Blank—No hook; G—Hooked hook

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SCSI
CHECKED		UNIT:	mm/in	PART NO.:	XSC36FT7B3G
APPROVED		SIZE:	A4	DWG NO.:	X-XSC36FT7B3G