



1

2

3

4

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.23	阿树

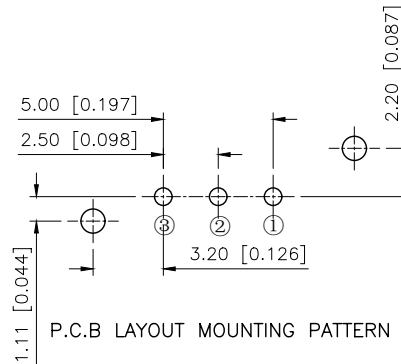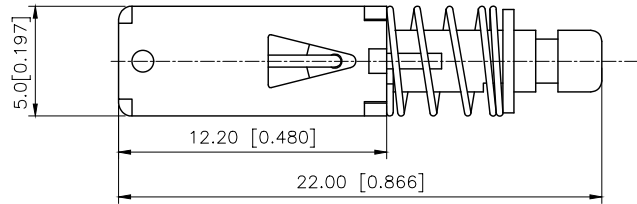

P.C.B LAYOUT MOUNTING PATTERN

FEATURES
Light operating force
Long term low contact resistance
Momentary or latching operation
Short stroke 3.0mm to latch

■ SPECIFICATIONS




1.ELECTRICAL

Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec

2.MECHANICAL AND ENVIRONMENTAL

●Temperature rating	Operating -15℃ to +55℃ storage,-25℃to +65℃
● Operation	160±80gf
● Stroke	Lock Stroke 2.0±0.2mm Full stroke,2.5±0.2mm
● Operating life	Full load:1x10 ⁴ cycles NO load:1x10 ⁵ cycles
● Con tact form	DPDT

PAPT NO	XKBS12E05-W
OPERATION	W:NO LOCK Z:LOCK

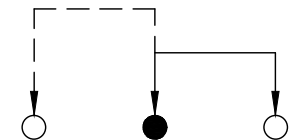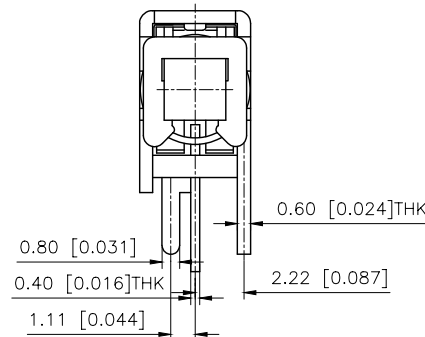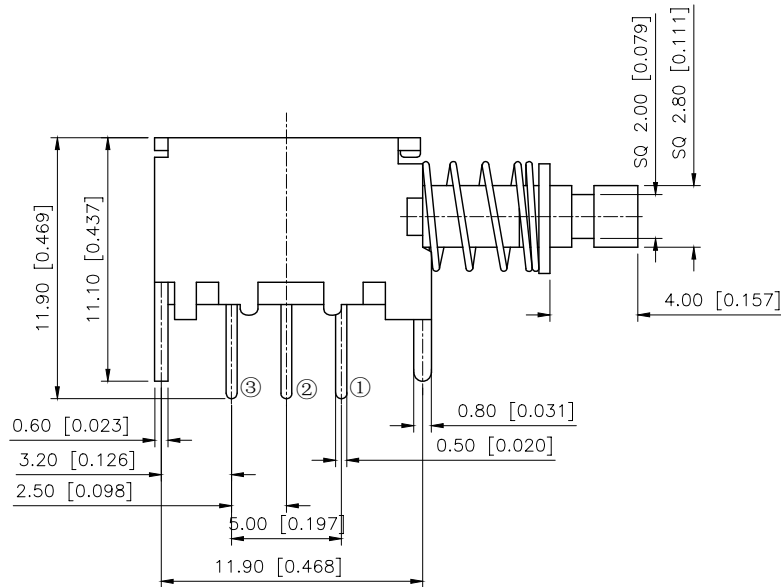

SCHEMATIC (NON-SHORTING)

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	KEY SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	XKBS12E05-W
APPROVED		SIZE:	A4	DWG NO.:	X-XKBS12E05-W

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

1

2

3

4