
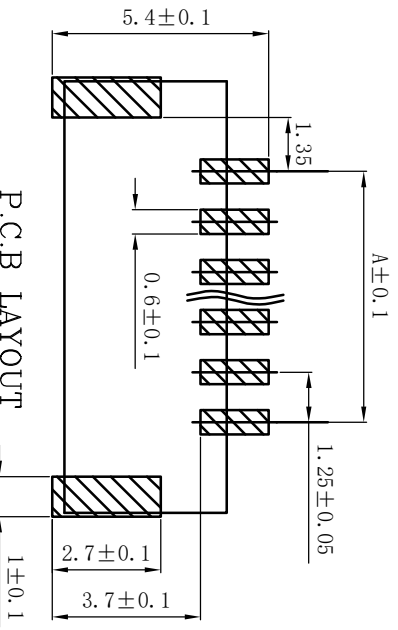
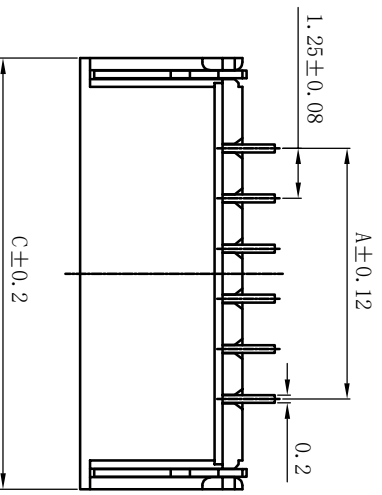




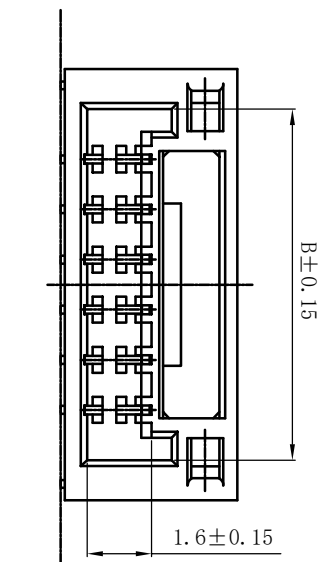

GH1.25mm贴片	A-(mm)	B-(mm)	C-(mm)
GH1.25mm-2P-WT	1.25	3.80	5.75
GH1.25mm-3P-WT	2.50	5.05	7.00
GH1.25mm-4P-WT	3.75	6.30	8.25
GH1.25mm-5P-WT	5.00	7.55	9.50
GH1.25mm-6P-WT	6.25	8.80	10.75
GH1.25mm-7P-WT	7.50	10.05	12.00
GH1.25mm-8P-WT	8.75	11.30	13.25
GH1.25mm-9P-WT	10.00	12.55	14.50
GH1.25mm-10P-WT	11.25	13.80	15.75
GH1.25mm-11P-WT	12.50	15.05	17.00
GH1.25mm-12P-WT	13.75	16.30	18.25
GH1.25mm-13P-WT	15.00	17.55	19.50
GH1.25mm-14P-WT	16.25	18.80	20.75
GH1.25mm-15P-WT	17.50	20.05	22.00
GH1.25mm-16P-WT	18.75	21.30	23.25

技术要求

1: 外观要求

- 1-1. 插针表面光洁、无损伤、锈蚀等缺陷。
- 1-2. 基座表面无脏污、飞边、排气不良等缺陷。

2: 电气性能:

- 2-1. 额定电流: 1.0A
- 2-2. 额定电压: 50V
- 2-3. 耐电 压: 500V
- 2-4. 接触电阻: $\leq 20m\Omega$
- 2-5. 绝缘电阻: $\geq 100m\Omega$
- 3: 工作温度: $-25^{\circ}C \sim +85^{\circ}C$

>20	±0.25	序号	材料名称	数量	材质	镀涂	REMARK
>10≤20	±0.2	①	卧贴针	n	磷铜	高温亮锡	GP PASS
>3≤10	±0.15	②	塑件	1	LCP	／	GP PASS
3≤	±0.1	③	焊片	2	磷铜	高温亮锡	GP PASS
尺寸范围							
设计		产品名称		GH1.25mm-6P-卧贴			
审核							
批准							
单位: mm							

□



深圳市宝通成电子有限公司

深圳市宝通成电子有限公司