




Configuration Results

Product: 440G-T27252
Description: Guard Locking Switch - TLS-GD2:
 Solenoid Voltage: 24V AC/DC,
 Contacts(Safety and Aux): 2
 Normally Closed, 1 Normally
 Open, Actuator: Fully-Flex, Conduit
 Entry: M20 Conduit

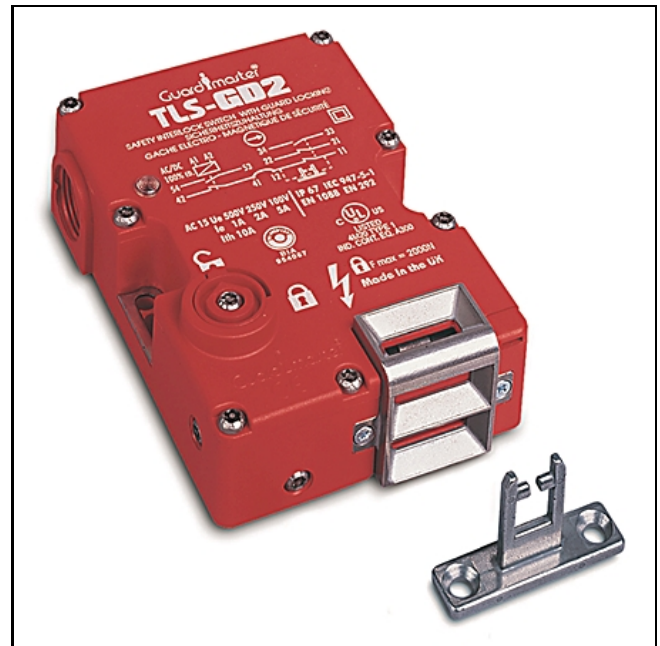

Representative Photo Only (actual product may vary based on configuration selections)

Selected Components

Selected Components

Catalog Number	Qty	Product Description	Supplementary Documents
440G-T27252	1	Guard Locking Switch - TLS-GD2: Solenoid Voltage: 24V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 1 Normally Open, Actuator: Fully-Flex, Conduit Entry: M20 Conduit	<ul style="list-style-type: none"> • Product Details and Certifications • Photo • 2D Dimensional Drawing (DWG) • 3D STEP Model (STP)

Contact your [Rockwell Automation Distributor or sales representative](#) for local pricing.

[Modify](#)
[Cancel](#)
[E Mail](#)

[Locations](#) | [Contact Us](#) | [Legal Notices](#)

Copyright © 2014 Rockwell Automation, Inc. All Rights Reserved.