

1



2

3

4

A

A

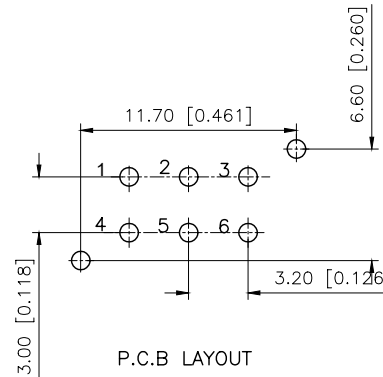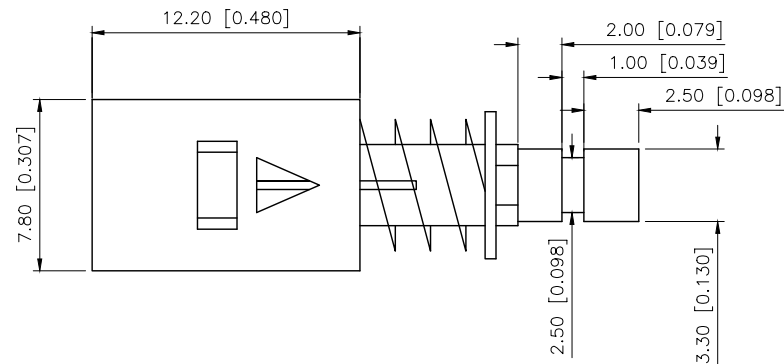

P.C.B LAYOUT

FEATURES

Light operating force
Long term low contact resistance
Momentary or latching operation
Short stroke 3.0mm to latch

SPECIFICATIONS

1.ELECTRICAL

Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec




2.MECHANICAL AND ENVIRONMENTAL

Temperature rating	Operating -15℃ to +55℃ storage, -25℃ to +65℃
Operation	160±80gf
Stroke	Lock Stroke 2.0±0.2mm Full stroke, 2.5±0.2mm
Operating life	Full load: 1x10 ⁴ cycles NO load: 1x10 ⁵ cycles
Con tact form	DPDT

PAPT NO	XKBS22E05-W
OPERATION	W:NO LOCK Z:LOCK

B

B

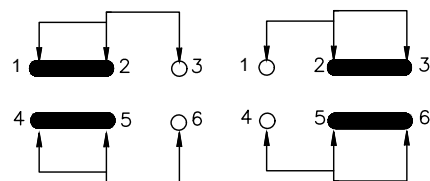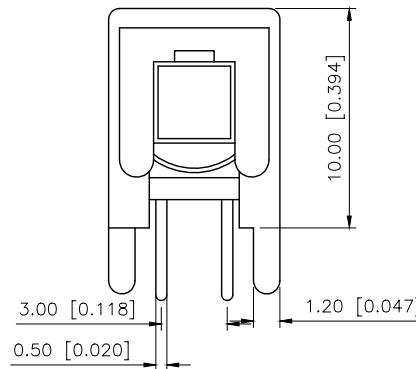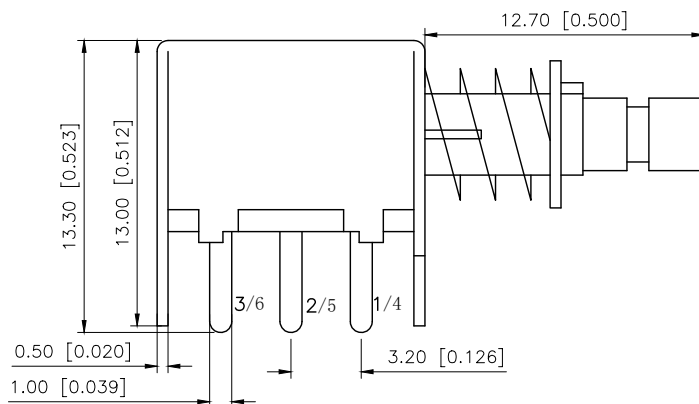

常态: 1-2导通 4-5导通

按下: 2-3导通 5-6导通

D

D

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	KEY SWITCH
APPROVED		SIZE: A4	PART NO.: XKBS22E05-W
			DWG NO.: X-XKBS22E05-W

SCALE	PAGE	REVISION
N/A	1/1	A1

1

2

3

4