
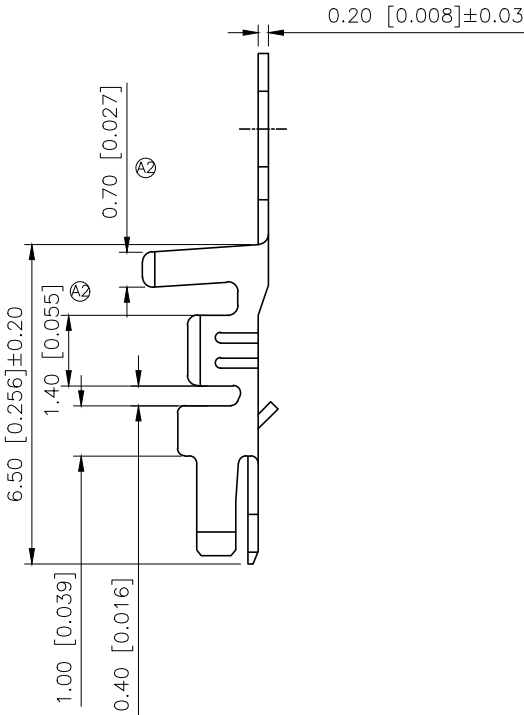


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2024.9.07	阿树
A2	N/A	②X7	产品尺寸及外观变更	2025.10.07	阿树



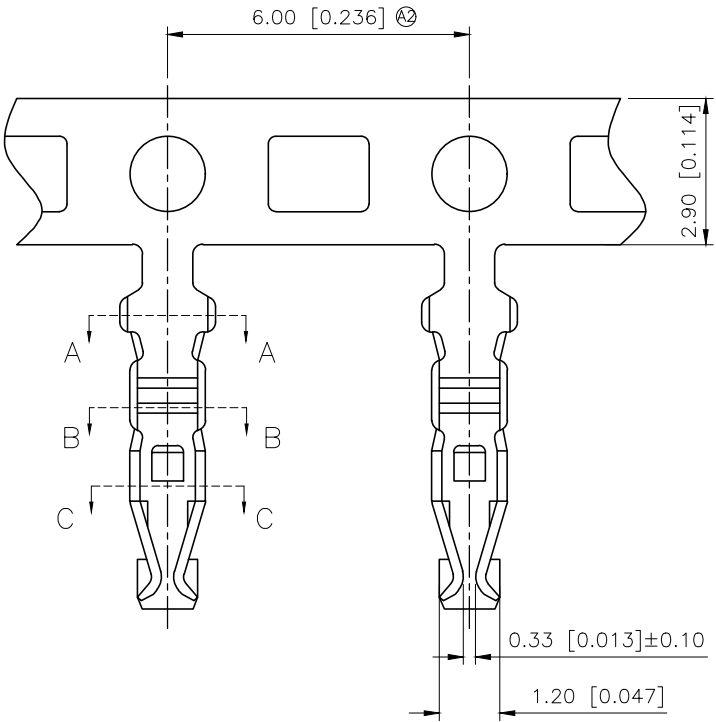


Specifications(规格):
1.Voltage rating(额定电压):DC 250V
2.Current rating(额定电流):3A AC/DC
3.Withstanding voltage(耐压值):≥800V AC/minute
4.Insulation resistance(绝缘电阻):≥1000MΩ Min
5.Contact resistance(接触电阻):≤20mΩ Max
6.Temperature range(使用温度):-40℃~+125℃

PART NO.:

X2000 I-P SN
① ② ③ ④

- ①Series No
②Category:T-terminal
③Material:P-Phosphor bronze
④Plating style:SN-Bright tin plating



X2000T-PSN	Phosphor Bronze	AWG#22-28	Stamping Before Plating :30u" Ni;70u" Sn	X2000HM-A
PARY NO	Matrial	Wire Range	Finish	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2000T-PSN
APPROVED		SIZE: A4	DWG NO.: