



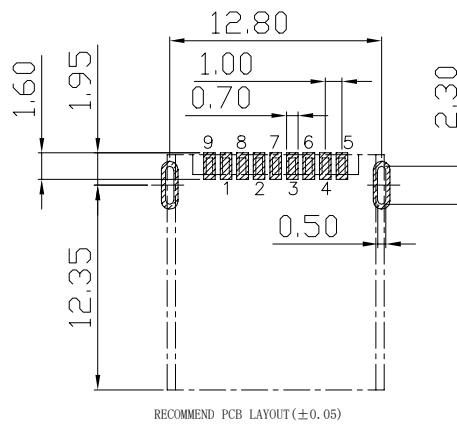
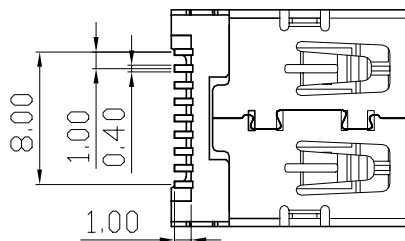



RoHS 2.0

PIN NUMBER	SIGNAL NAME
PIN 1	Vbus
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	StdA_SSRX-
PIN 6	StdA_SSRX+
PIN 7	GND_DRAIN
PIN 8	StdA_SSTX-
PIN 9	StdA_SSTX+
SHELL	GND

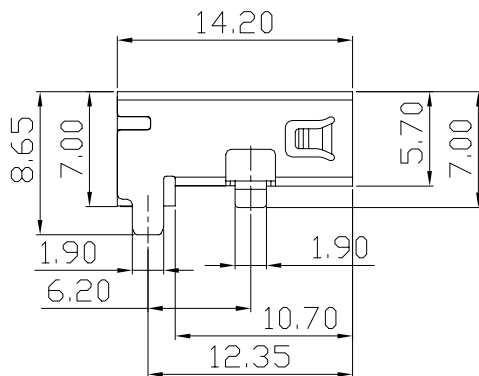

3D VIEW




NOTES:

- MATERIAL:
 - HOUSING: LCP ,COLOR IS BLUE;
 - CONTACT: BRASS (H65 T=0.20mm);
 - SHELL: COLD ROLLED IRON (SPCC,T=0.3mm);
- FINISH:
 - TERMINAL:
CONTACT AREA: GOLD PLATED G/Fu";
SOLDER AREA: PLATED OVER TIN;
 - SHELL: NI PLATED OVER ALL ;
- ELECTRICAL:
 - VOLTAGE RATING: 30 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 30MILLIOHMS MAX. ;
 - WITHSTAND VOLTAGE: 500 VAC RMS

- MECHANICAL:
 - MATING FORCE: 35N MAX. ;
 - UNMATING FORCE: 5~35N;
 - OPERATING LIFE: 1500 CYCLES MIN. ;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: -40° C~+85° C;
 - OPERATION TEMPERATURE RANGE: -25° C~+70° C;
- SALT SPRAY TEST: 24H(EXCLUDING RIVETED BENDS)

C	外壳	SPCC	镀镍	
B	端子	黄铜H65	焊料区镀锡 接触区镀金G/F	
A	基座	LCP	蓝色	
序号	品 名	材 质	电镀／颜色	备 注

深圳市富港科技有限公司

UNLESS OTHERWISE, GENERAL TOLERANCE:		NAME:			P/N:		
X. xxx ±0.10 X. xx ±0.20 X. x ±0.30		3.0 A母贴板直脚平口			DWG NO.: FG-ST-003-001Z-T		
THIRD ANGLE PROJECTION 		UNIT:	SCALE	SIZE:	SHEET:	REV.	
		mm	1:1	A4	1/1	A1	
ANGULAR:		DRAWN:			CHECKED:		APPROVED
X. xx° ±1° X. x° ±3° X. ° ±5°		Q S X					