
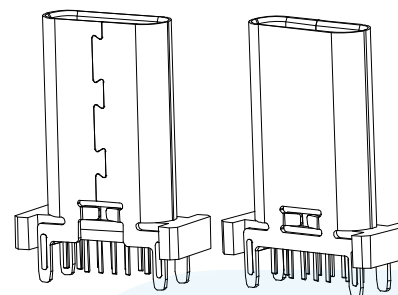
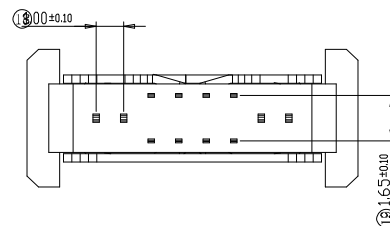


ZONE	E C N . N O	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

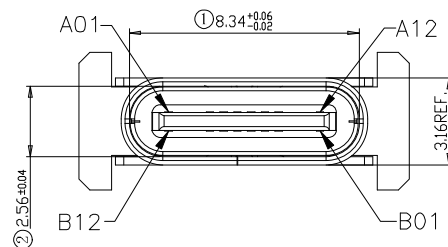

特性:

一、电气性能: ELECTRICAL

1. 额定电流: 5.0A
2. 接触阻抗: 40 MILLIOHMS MAX
3. 耐电压: 150V AC / 1 mA MAX
4. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力: 5~20N
2. 拨出力: 8~20N
3. 使用寿命: 10000次、拨出力 6N MIN

三、材料: MATERIAL.




1. 塑胶: LCP/PA9T UL94V-0
2. 端子: C7025/C18400 T=0.15MM
3. 外壳: SUS304 T=0.30MM
4. 卡勾: SUS304 T=0.15MM

四、电镀:FINISH

1. 端子: 接触点镀金3U"MIN
PIN脚焊接区域镀金1U"MIN.
2. 外壳: 镀镍50U"MIN (盐雾48H)

- 六、SMT回流焊（峰值 $260^{\circ}\text{C}\pm 5^{\circ}\text{C}$ ）不能起泡、
熔胶、变色不良（变形在公差范围以内）

- 七、工作温度:
- $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

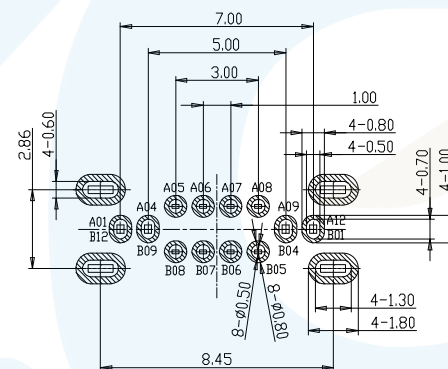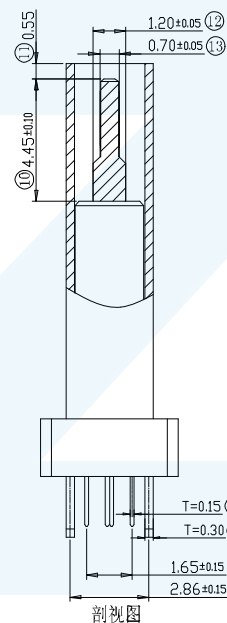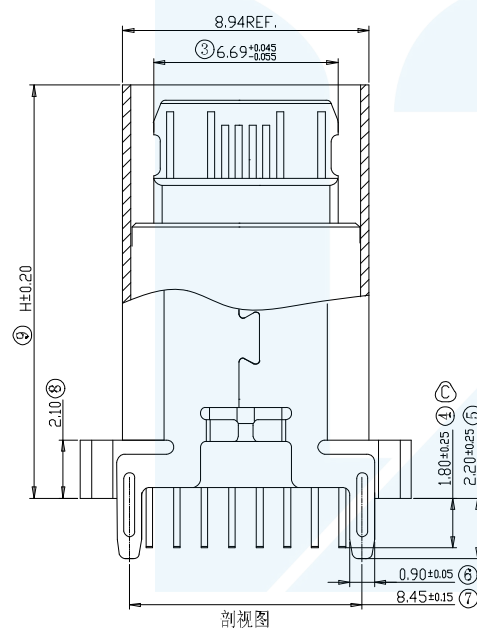

RECOMMENDED P.C.B. LAYOUT (俯视图)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TABLE:

"H"Product height	A	B	C	D	E	F	G	H	I	J	K	L	M	4
dimension	8.8	9.3	10.0	12.4	13.1	13.7	15.0	17.5	18.5	19.6	20.5	22.5	24.5	




LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB48104-16DBAP-Hx			SHEET	1/2

PART NAME	TYPE-C 16PIN 母座 插播 A款	TOLERANCE UNLESS 0.0±0.3	0.±2°	UNIT: mm
PART NO.	ZB48104-16DBAP-Hx	OTHERWISE SPECIFIED: 0.00±0.2 0.00±0.1	0.0°±1° 0.00°±0.5°	

RoHS
Compliant


ZONE	EC N. NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

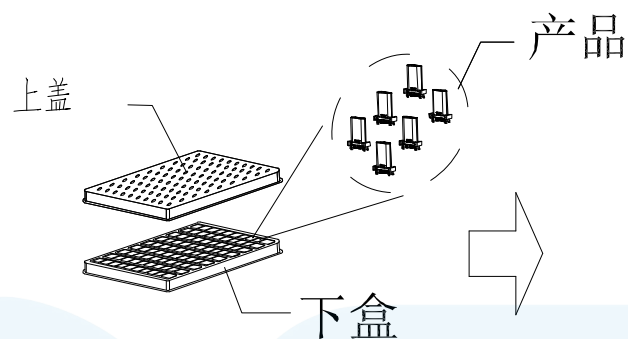


① PE 真空盒 (1Set).




② 100Pcs/盒

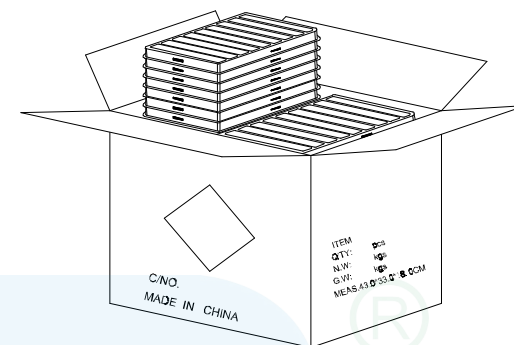


③ 50盒/箱 (50)

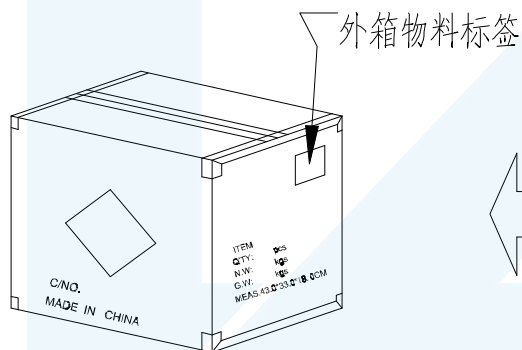

⑥ 依图示粘贴产品或RoHS标签.



⑤ 外箱用透明胶纸带封“工”字型.

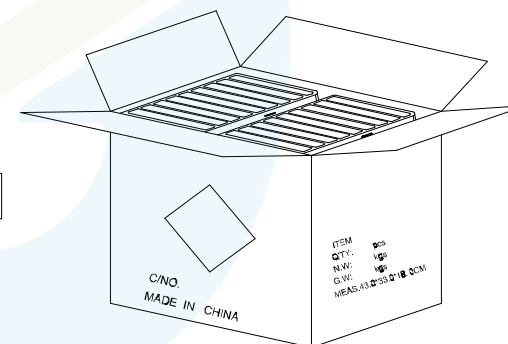

④ 每箱竖放25盒*2, 若尾数箱在空间处加装填充物.

备注:

1. PE真空盒1set
2. 每盒装成品100Pcs, 四周并用订书机装订;
3. 每箱数量见表一
4. 外箱尺寸与规格: 38*20*28CM
5. 外箱用透明胶纸带封“工”字型;

LZG

LZG INDUSTRIAL CO., LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB48104-16DBAP-Hx			SHEET	2/2

PART NAME	TYPE-C 16PIN 母座 立插 A款	TOLERANCE UNLESS	0.0±0.30	0.°±2°	UNIT:	
PART NO.	ZB48104-16DBAP-Hx	OTHERWISE SPECIFIED:	0.00±0.20	0.0°±1°	mm	