


DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

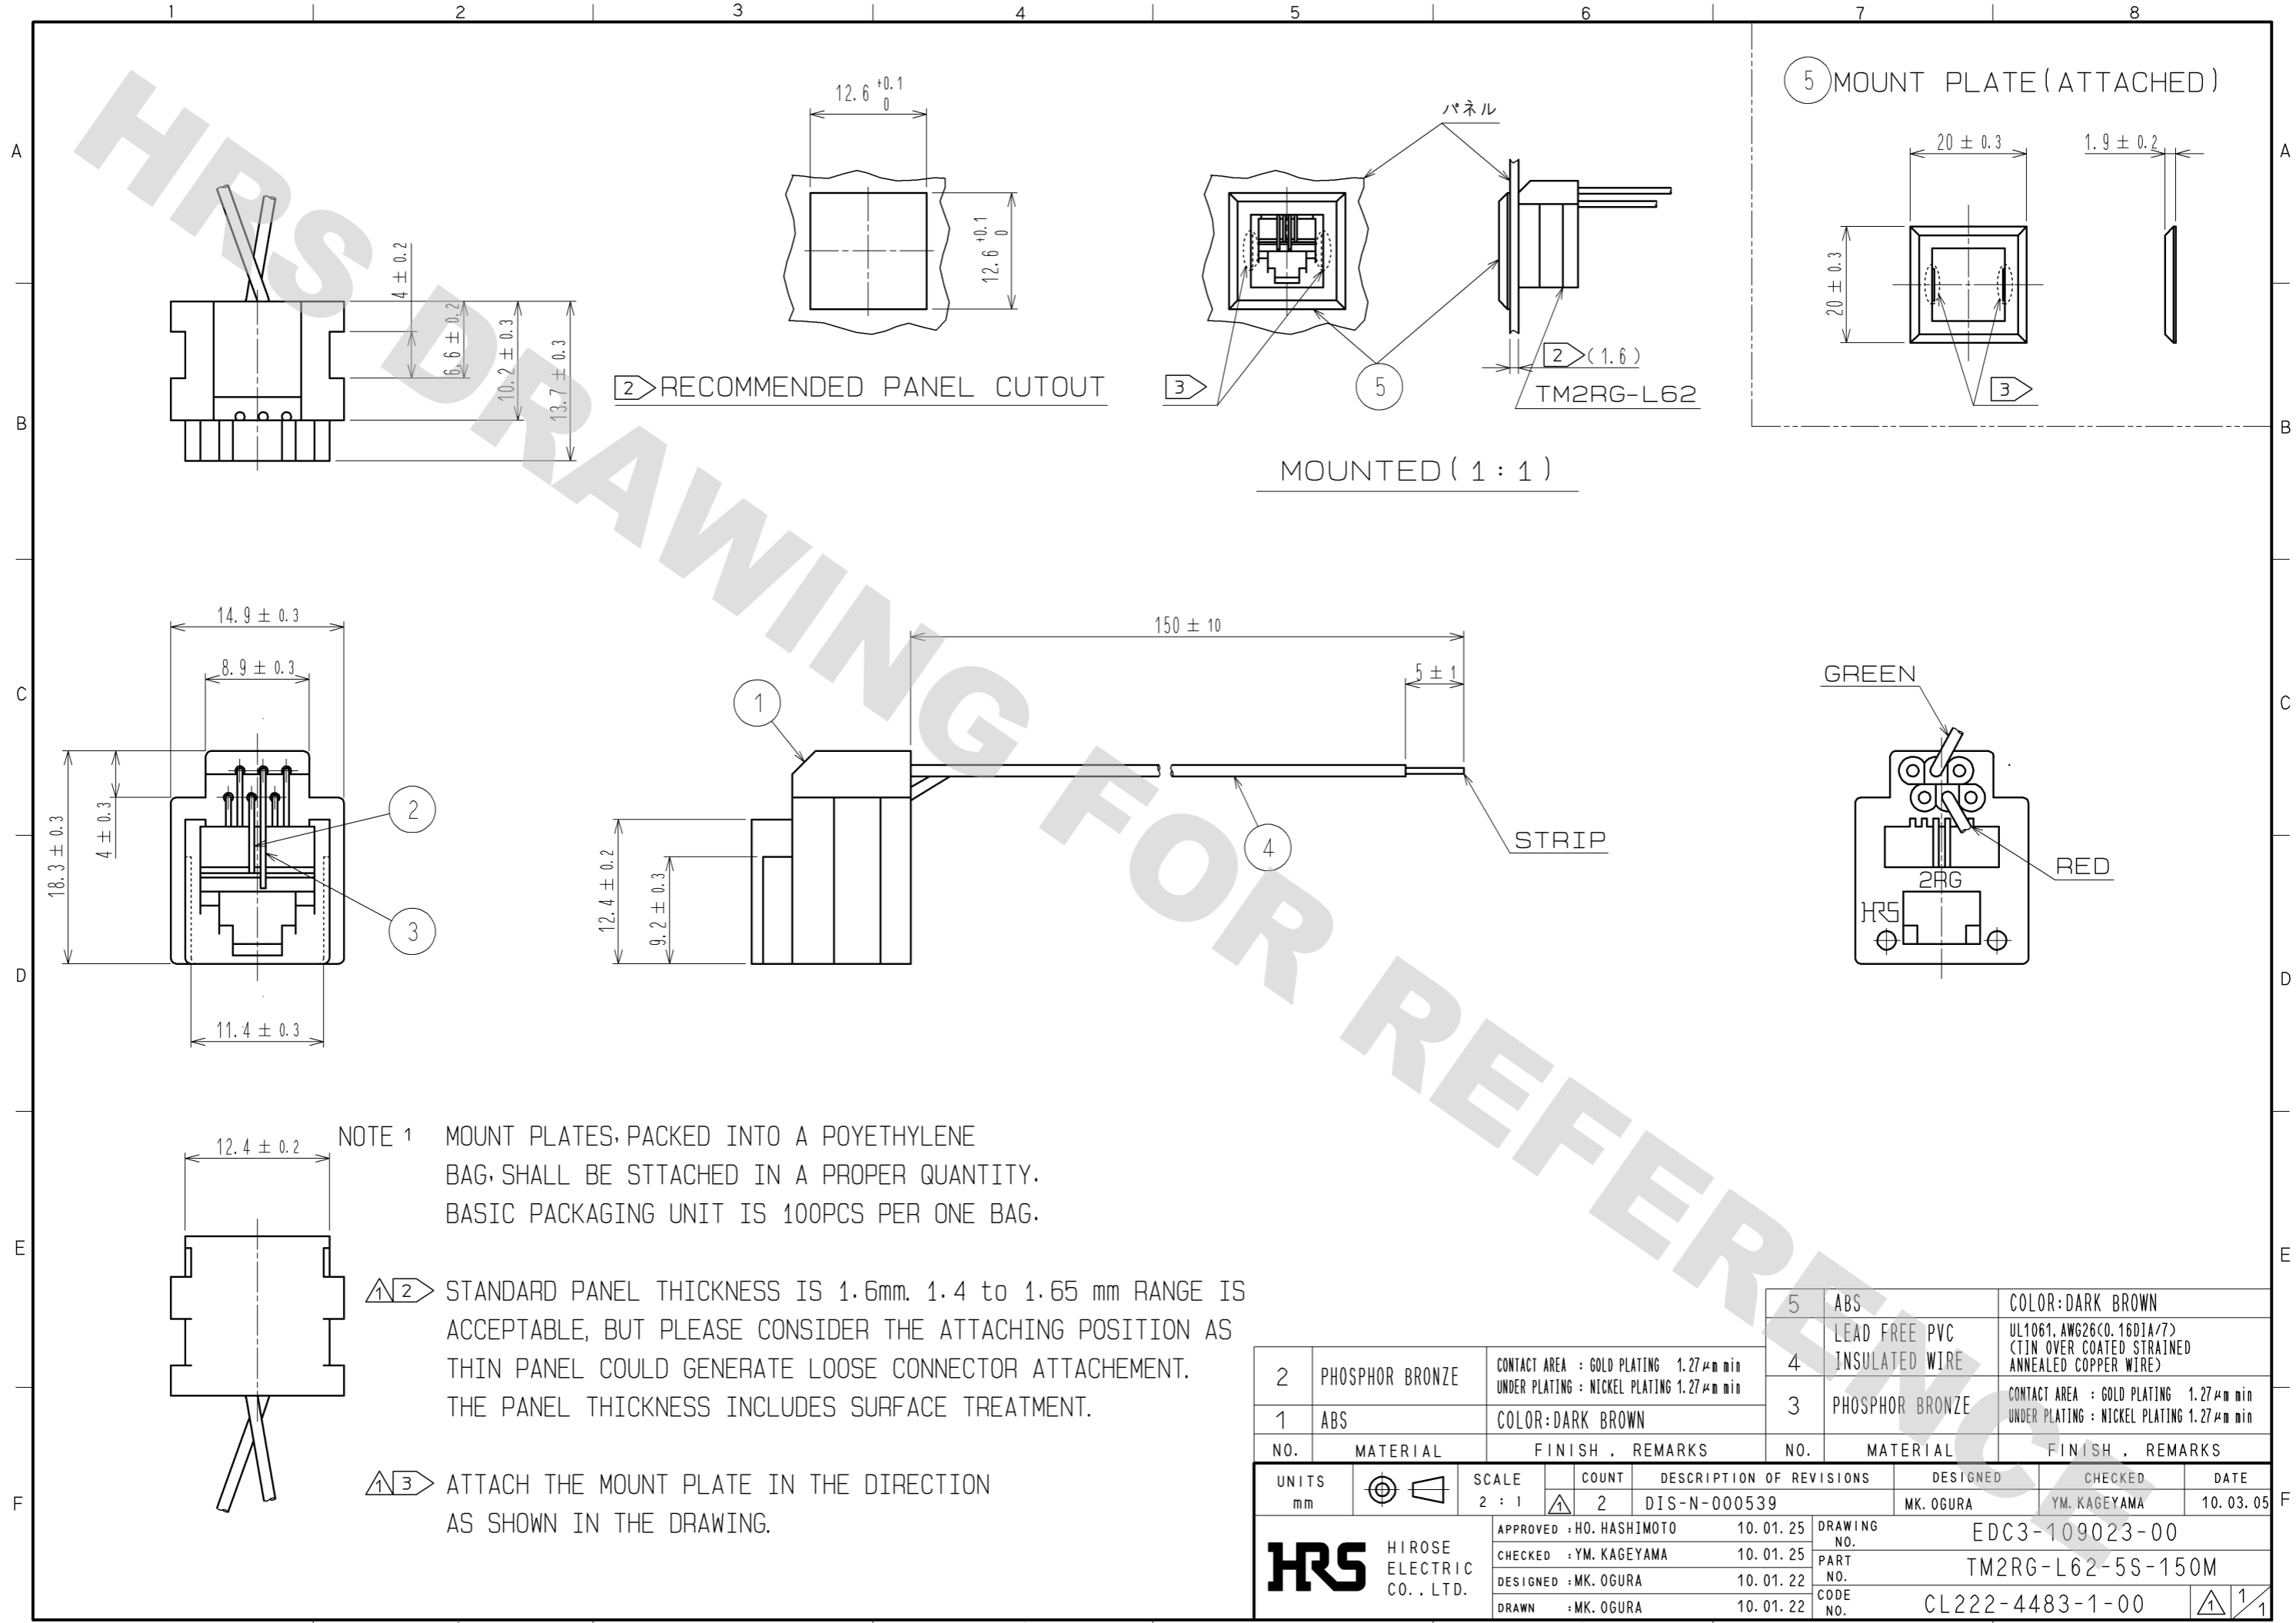


② RECOMMENDED PANEL CUTOUT

MOUNTED ( 1 : 1 )

⑤ MOUNT PLATE ( ATTACHED )

STRIP

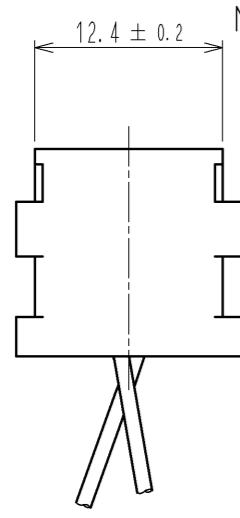

NOTE 1 MOUNT PLATES, PACKED INTO A POYETHYLENE BAG, SHALL BE STTACHED IN A PROPER QUANTITY. BASIC PACKAGING UNIT IS 100PCS PER ONE BAG.

② STANDARD PANEL THICKNESS IS 1.6mm. 1.4 to 1.65 mm RANGE IS ACCEPTABLE, BUT PLEASE CONSIDER THE ATTACHING POSITION AS THIN PANEL COULD GENERATE LOOSE CONNECTOR ATTACHEMENT. THE PANEL THICKNESS INCLUDES SURFACE TREATMENT.

③ ATTACH THE MOUNT PLATE IN THE DIRECTION AS SHOWN IN THE DRAWING.

2	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 1.27µm min UNDER PLATING : NICKEL PLATING 1.27µm min	5	ABS	COLOR:DARK BROWN
1	ABS	COLOR:DARK BROWN	4	LEAD FREE PVC INSULATED WIRE	UL1061,AWG26(CO.16DIA/7) (TIN OVER COATED STRAINED ANNEALED COPPER WIRE)
			3	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 1.27µm min UNDER PLATING : NICKEL PLATING 1.27µm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-N-000539	
APPROVED : HO. HASHIMOTO 10.01.25			DESIGNED MK. OGURA	CHECKED YM. KAGEYAMA	DATE 10.03.05
CHECKED : YM. KAGEYAMA 10.01.25			DRAWING NO. EDC3-109023-00		
DESIGNED : MK. OGURA 10.01.22			PART NO. TM2RG-L62-5S-150M		
DRAWN : MK. OGURA 10.01.22			CODE NO. CL222-4483-1-00		
			1/1		