

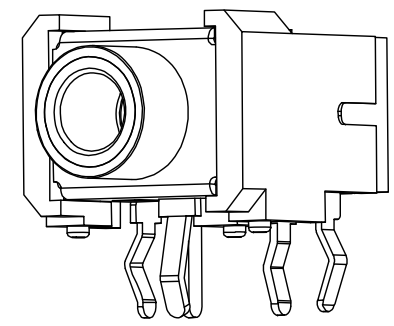

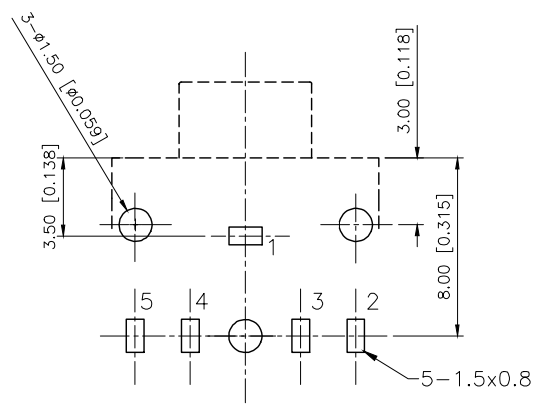
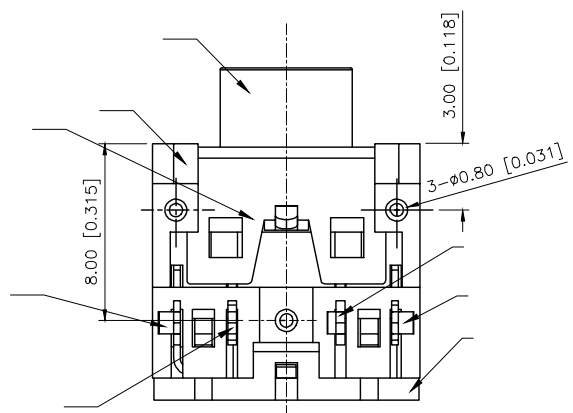


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2025.10.13	

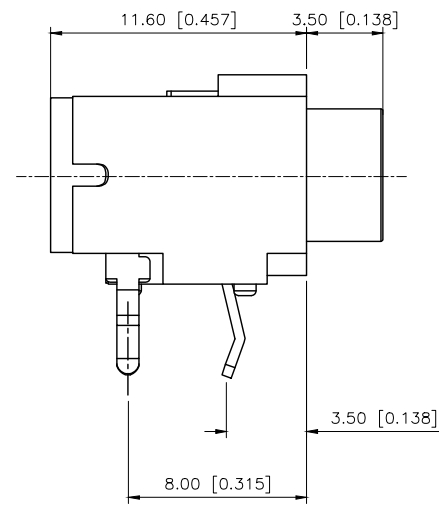

SCHEMATIC

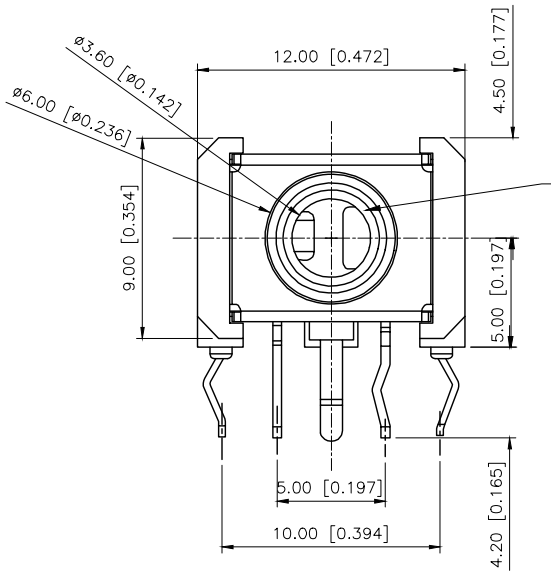

- Specifications()
- 1.Voltage rating():DC 30V
 - 2.Current rating():0.5A AC/DC
 - 3.Withstanding voltage():≥500V AC/minute
 - 4.Insulation resistance():≥100MΩ Min
 - 5.Contact resistance():≤30mΩ Max
 - 6.Mating cycles 5000 cycles Min
 - 7.Insertion and extraction force 3~20N
 - 8.Temperature range():-30 ~+70

PJ-3062-B	
COLOR	B:Black R:Red G:Green CO:Copper set

9	Bushing	1	H59 Brass ø=5mm	D.Ni
8	Cover	1	PA	Black
7	Terminal 5	1	Phosphor Bronze ø=0.3mm	D.L1Ag
6	Terminal 4	1	H62(Y) Brass ø=0.4mm	D.L1Ag
5	Terminal 3	1	H62(Y) Brass ø=0.4mm	D.L1Ag
4	Terminal 2	1	Phosphor Bronze ø=0.3mm	D.L1Ag
3	Terminal 1	1	H62(Y) Brass ø=0.3mm	D.Cu/Sn
2	Pedestal	1	PBT	Black
1	Color Marking Set	1	PBT	
NO	PAPT NAMF	QTY	MATERIAL	PLATING/COLOR

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN		VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	3.5 PHONE JACK
APPROVED		SIZE: A4	PART NO.:
			PJ-3062-B
			DWG NO.: