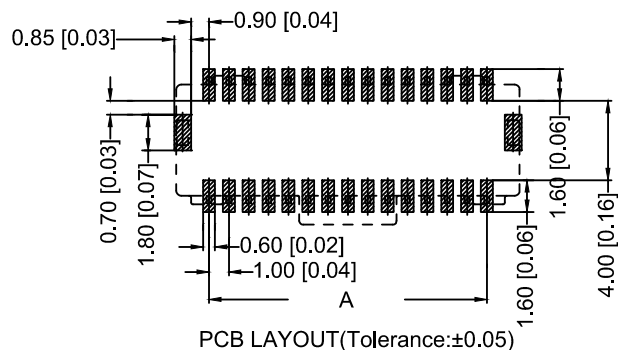
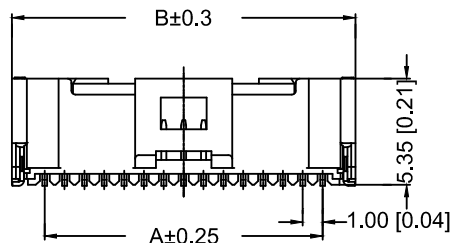
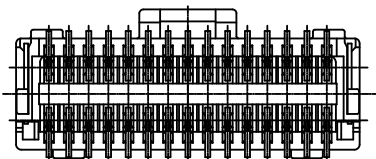
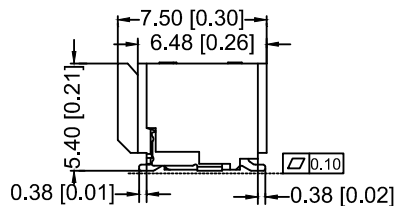




Specifications:

规格:

Voltage rating:50V AC/DC

额定电压: 50V AC/DC

Current rating:0.8A AC/DC

额定电流: 0.8A AC/DC

Withstanding voltage:250V
AC/minute

耐受电压: 250V AC/分钟

Temperature range:-25℃-+85℃

温度范围: -25℃-+85℃

X1004	W	V	S	-2x15	-9T	V01
①	②	③	④	⑤	⑥	⑦

① Series No.

② Category:W-WAFER

③ Wedding Board Angle:V-Stringht 180°

④ Welding way :S-SMT

⑤ Row No.Pin No.: 2xXX

⑥ Material:9T-PA9T 94V-0

⑦ Plating Category:V01-Gold Flash

PIN	DIM A	DIM B	DIM C	DIM D
2X10P	9.00	12.30	10.45	11.25
2X15P	14.00	17.30	15.45	16.25
2X20P	19.00	22.30	20.45	21.25
2X25P	24.00	27.30	25.45	26.25

							DSND		DATE		SCALE: N/A	MODEL TYPE: 1.0 mm Crimp Style Connector		
Δx				XKB	ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.: X1004WVS-2x15-9TV01		
Δx					4<L≤16	±0.3	CHKD		DATE		UNIT: mm/in	DWG NO: X-X1004WVS-2x15-9TV01		
Δx					16<L≤63	±0.4	APPD		DATE		SIZE: A4	WEIGHT 1.0g	SHEET 1/1	REVISION A0
MARK	DESCRIPTION			DATE	REVISED	APPROVED								
REVISIONS							UNSPECIFIED TOLERANCES							
www.helloxkb.com							XKB INDUSTRIAL PRECISION CO.,LIMITED							