


REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A1	N/A		图面升级整理图面	2025.08.09
A2	N/A		图面更新	2025.12.16

P/N	R/C
U261-24XXN-4B0417	在C2与C3靠近IC的位置竖着贴一个(O欧姆电阻)

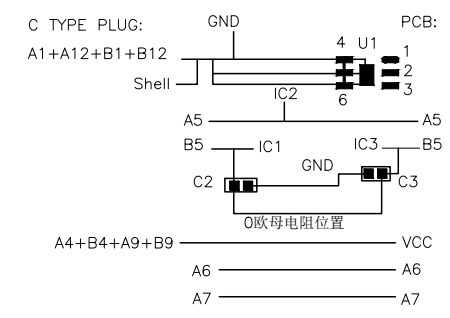

U261-2422N-4B0417

- 1: Au1u"
2: Ni
1: Au1u"
2: Au3u"
4: Au15u"
5: Au30u"

- REMARKS:
- 1.CONTACT INSERTION AND WITHDRAW FORCE:
- 1.Insertion force: 5N-20N max.
2. Withdrawal force: 8N-20N.
- 3.Durability : 10000Cycles.
- 2.ELECTRIC PROPERTY:
- 1.Contact current rating: 3A.
- 2.Dielectric Strength: 100V AC(RMS).
- 3.Insulation Resistance: 100 megaohms min.
- 4.Contact resistance:
- 40mOhms MAX.FOR VBUS,GND AND OTHER CONTACT
- 50mOhms MAX.AFTER ENVIRONMENT TEST
- 3.AMBIENT TEMPERATURE:
- 1.Operating temperature: -55°C to +85°C.

6	Shrapnel	SUS T=0.10mm	
5	Shell	SUS T=0.15mm	Ovep-plating: Ni
4	Terminal	C7025 T=0.15mm	Ovep-plating: Au Ni/Sn
3	Latch	SUS T=0.4mm	
2	Housing	LCP	UL94-0
1	Housing Stopper	LCP	UL94-0

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn	D+	D-	SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	Part NO.:
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A2

